

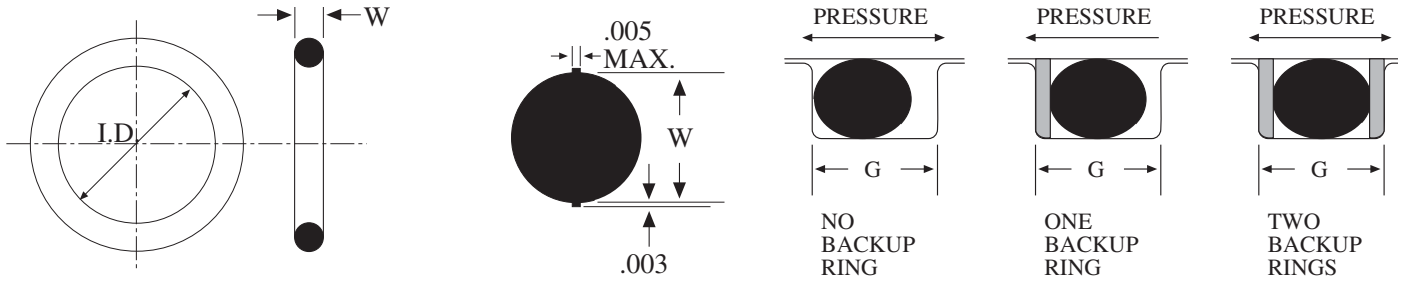


# O-RING GLAND DIMENSIONS





## O-Ring Gland Design For Static Seals

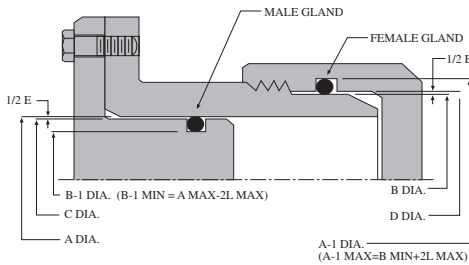

- A - Bore Dia. (male gland)
- A-1 - Groove Dia. (female gland)
- B - Tube OD (female gland)
- B-1 - Groove Dia. (male gland)
- C - Plug Dia. (male gland)
- D - Throat Dia. (female gland)
- E - Diametrical Clearance

W O-RING CROSS SECTION	L GROOVE DEPTH		SQUEEZE				E DIAMETRICAL CLEARANCE MAX.	G GROOVE WIDTH ± .005			R GROOVE RADIUS	ECCEN- TRICITY MAX.
			RADIAL		AXIAL			NO BACKUP RING	ONE BACKUP RING	TWO BACKUP RINGS		
			INCHES	%	INCHES	%						
.070	.050-.052	.050-.054	.015-.023	22-23	.013-.023	19-32	.004	.095	.140	.207	.005-.015	.002
.103	.081-.083	.074-.080	.017-.025	17-24	.020-.032	20-30	.005	.142	.173	.240	.005-.015	.002
.139	.111-.113	.101-.107	.022-.032	16-23	.028-.042	20-30	.006	.189	.210	.277	.010-.025	.003
.210	.170-.173	.152-.162	.032-.045	15-21	.043-.063	21-30	.006	.283	.313	.413	.020-.035	.004
.275	.226-.229	.201-.211	.040-.055	15-20	.058-.080	21-29	.007	.377	.410	.540	.020-.035	.00

## O-Ring Gland Design For Reciprocating Seals

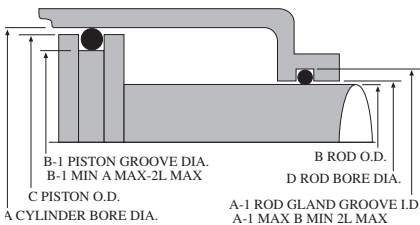

- A - B D . C
- B - OD R
- C - OD P
- D - B D . R

W O-RING CROSS SECTION	L GROOVE DEPTH	SQUEEZE		E DIAMETRICAL CLEARANCE MAX.	G GROOVE WIDTH ± .005			R GROOVE RADIUS	ECCEN- TRICITY MAX.
		INCHES	%		NO BACKUP RING	ONE BACKUP RING	TWO BACKUP RINGS		
.070	.055-.057	.010-.018	15-25	.004	.095	.140	.207	.005-.015	.002
.103	.088-.090	.010-.018	10-17	.005	.142	.173	.240	.005-.015	.002
.139	.121-.123	.012-.022	9-16	.006	.189	.210	.277	.010-.025	.003
.210	.185-.188	.017-.030	8-14	.006	.283	.313	.413	.020-.035	.004
.275	.237-.240	.029-.044	11-16	.007	.377	.410	.540	.020-.035	.005

# O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	I.D.	O.D.	Width	I.D. Tol.	W. Tol.
-001	1/32	3/32	1/32	.029±.004	.040±.003
-001 1/2	1/16	1/8	1/32	.070±.004	.040±.003
-002	3/64	9/64	3/64	.042±.004	.050±.003
-003	1/16	3/16	1/16	.056±.004	.060±.003
-004	5/64	13/64	1/16	.070±.005	.070±.003
-005	3/32	7/32	1/16	.101±.005	.070±.003
-006	1/8	1/4	1/16	.114±.005	.070±.003
-007	5/32	9/32	1/16	.145±.005	.070±.003
-008	3/16	5/16	1/16	.176±.005	.070±.003
-009	7/32	11/32	1/16	.208±.005	.070±.003
-010	1/4	3/8	1/16	.239±.005	.070±.003
-011	5/16	7/16	1/16	.301±.005	.070±.003
-012	3/8	1/2	1/16	.364±.005	.070±.003
-013	7/16	9/16	1/16	.426±.005	.070±.003
-014	1/2	5/8	1/16	.489±.005	.070±.003
-015	9/16	11/16	1/16	.551±.007	.070±.003
-016	5/8	3/4	1/16	.614±.009	.070±.003
-017	11/16	13/16	1/16	.676±.009	.070±.003
-018	3/4	7/8	1/16	.739±.009	.070±.003
-019	13/16	15/16	1/16	.801±.009	.070±.003
-020	7/8	1	1/16	.864±.009	.070±.003
-021	15/16	1 1/16	1/16	.926±.009	.070±.003
-022	1	1 1/8	1/16	.989±.010	.070±.003
-023	1 1/16	1 3/16	1/16	1.051±.010	.070±.003
-024	1 1/8	1 1/4	1/16	1.114±.010	.070±.003
-025	1 3/16	1 5/16	1/16	1.176±.011	.070±.003
-026	1 1/4	1 3/8	1/16	1.239±.011	.070±.003
-027	1 5/16	1 7/16	1/16	1.301±.011	.070±.003
-028	1 3/8	1 1/2	1/16	1.364±.013	.070±.003
-029	1 1/2	1 5/8	1/16	1.489±.013	.070±.003
-030	1 5/8	1 3/4	1/16	1.614±.013	.070±.003
-031	1 3/4	1 7/8	1/16	1.739±.015	.070±.003
-032	1 7/8	2	1/16	1.864±.015	.070±.003
-033	2	2 1/8	1/16	1.989±.018	.070±.003
-034	2 1/8	2 1/4	1/16	2.114±.018	.070±.003
-035	2 1/4	2 3/8	1/16	2.239±.018	.070±.003
-036	2 3/8	2 1/2	1/16	2.364±.018	.070±.003
-037	2 1/2	2 5/8	1/16	2.489±.018	.070±.003
-038	2 5/8	2 3/4	1/16	2.614±.020	.070±.003
-039	2 3/4	2 7/8	1/16	2.739±.020	.070±.003
-040	2 7/8	3	1/16	2.864±.020	.070±.003
-041	3	3 1/8	1/16	2.989±.024	.070±.003
-042	3 1/4	3 3/8	1/16	3.239±.024	.070±.003
-043	3 1/2	3 5/8	1/16	3.489±.024	.070±.003
-044	3 3/4	3 7/8	1/16	3.739±.027	.070±.003
-045	4	4 1/8	1/16	3.989±.027	.070±.003
-046	4 1/4	4 3/8	1/16	4.239±.030	.070±.003

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	I.D.	O.D.	Width	I.D. Tol.	W. Tol.
-047	4 1/2	4 5/8	1/16	4.489±.030	.070±.003
-048	4 3/4	4 7/8	1/16	4.739±.030	.070±.003
-049	5	5 1/8	1/16	4.989±.037	.070±.003
-050	5 1/4	5 3/8	1/16	5.239±.037	.070±.003
-102	1/16	1/4	3/32	.049±.005	.103±.003
-103	3/32	9/32	3/32	.081±.005	.103±.003
-104	1/8	5/16	3/32	.112±.005	.103±.003
-105	5/32	11/32	3/32	.143±.005	.103±.003
-106	3/16	3/8	3/32	.174±.005	.103±.003
-107	7/32	13/32	3/32	.206±.005	.103±.003
-108	1/4	7/16	3/32	.237±.005	.103±.003
-109	5/16	1/2	3/32	.299±.005	.103±.003
-110	3/8	9/16	3/32	.362±.005	.103±.003
-111	7/16	5/8	3/32	.424±.005	.103±.003
-112	1/2	11/16	3/32	.487±.005	.103±.003
-113	9/16	3/4	3/32	.549±.005	.103±.003
-114	5/8	13/16	3/32	.612±.009	.103±.003
-115	11/16	7/8	3/32	.674±.009	.103±.003
-116	3/4	15/16	3/32	.737±.009	.103±.003
-117	13/16	1	3/32	.799±.010	.103±.003
-118	7/8	1 1/16	3/32	.862±.010	.103±.003
-119	15/16	1 1/8	3/32	.924±.010	.103±.003
-120	1	1 3/16	3/32	.987±.010	.103±.003
-121	1 1/16	1 1/4	3/32	1.049±.010	.103±.003
-122	1 1/8	1 5/16	3/32	1.112±.010	.103±.003
-123	1 3/16	1 3/8	3/32	1.174±.012	.103±.003
-124	1 1/4	1 7/16	3/32	1.237±.012	.103±.003
-125	1 5/16	1 1/2	3/32	1.299±.012	.103±.003
-126	1 3/8	1 9/16	3/32	1.362±.012	.103±.003
-127	1 7/16	1 5/8	3/32	1.424±.012	.103±.003
-128	1 1/2	1 11/16	3/32	1.487±.012	.103±.003
-129	1 9/16	1 3/4	3/32	1.549±.015	.103±.003
-130	1 5/8	1 13/16	3/32	1.612±.015	.103±.003
-131	1 11/16	1 7/8	3/32	1.674±.015	.103±.003
-132	1 3/4	1 15/16	3/32	1.737±.015	.103±.003
-133	1 13/16	2	3/32	1.799±.015	.103±.003
-134	1 7/8	2 1/16	3/32	1.862±.015	.103±.003
-135	1 15/16	2 1/8	3/32	1.925±.017	.103±.003
-136	2	2 3/16	3/32	1.987±.017	.103±.003
-137	2 1/16	2 1/4	3/32	2.050±.017	.103±.003
-138	2 1/8	2 5/16	3/32	2.112±.017	.103±.003
-139	2 3/16	2 3/8	3/32	2.175±.017	.103±.003
-140	2 1/4	2 7/16	3/32	2.237±.017	.103±.003
-141	2 5/16	2 1/2	3/32	2.300±.020	.103±.003
-142	2 3/8	2 9/16	3/32	2.362±.020	.103±.003
-143	2 7/16	2 5/8	3/32	2.425±.020	.103±.003
-144	2 1/2	2 11/16	3/32	2.487±.020	.103±.003

# O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS		AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	I.D.	O.D.	Width	I.D. Tol.	W. Tol.		I.D.	O.D.	Width	I.D. Tol.	W. Tol.
-145	2 9/16	2 3/4	3/32	2.550±.020	.103±.003	-214	1	1 1/4	1/8	.984±.010	.139±.004
-146	2 5/8	2 13/16	3/32	2.612±.020	.103±.003	-215	1 1/16	1 5/16	1/8	1.046±.010	.139±.004
-147	2 11/16	2 7/8	3/32	2.675±.022	.103±.003	-216	1 1/8	1 3/8	1/8	1.109±.012	.139±.004
-148	2 3/4	2 15/16	3/32	2.737±.022	.103±.003	-217	1 3/16	1 7/16	1/8	1.171±.012	.139±.004
-149	2 13/16	3	3/32	2.800±.022	.103±.003	-218	1 1/4	1 1/2	1/8	1.234±.012	.139±.004
-150	2 7/8	3 1/16	3/32	2.862±.022	.103±.003	-219	1 5/16	1 9/16	1/8	1.296±.012	.139±.004
-151	3	3 3/16	3/32	2.987±.024	.103±.003	-220	1 3/8	1 5/8	1/8	1.359±.012	.139±.004
-152	3 1/4	3 7/16	3/32	3.237±.024	.103±.003	-221	1 7/16	1 11/16	1/8	1.421±.012	.139±.004
-153	3 1/2	3 11/16	3/32	3.487±.024	.103±.003	-222	1 1/2	1 3/4	1/8	1.484±.015	.139±.004
-154	3 3/4	3 15/16	3/32	3.737±.028	.103±.003	-223	1 5/8	1 7/8	1/8	1.609±.015	.139±.004
-155	4	4 3/16	3/32	3.987±.028	.103±.003	-224	1 3/4	2	1/8	1.734±.015	.139±.004
-156	4 1/4	4 7/16	3/32	4.237±.030	.103±.003	-225	1 7/8	2 1/8	1/8	1.859±.018	.139±.004
-157	4 1/2	4 11/16	3/32	4.487±.030	.103±.003	-226	2	2 1/4	1/8	1.984±.018	.139±.004
-158	4 3/4	4 15/16	3/32	4.737±.030	.103±.003	-227	2 1/8	2 3/8	1/8	2.109±.018	.139±.004
-159	5	5 3/16	3/32	4.987±.035	.103±.003	-228	2 1/4	2 1/2	1/8	2.234±.020	.139±.004
-160	5 1/4	5 7/16	3/32	5.237±.035	.103±.003	-229	2 3/8	2 5/8	1/8	2.359±.020	.139±.004
-161	5 1/2	5 11/16	3/32	5.487±.035	.103±.003	-230	2 1/2	2 3/4	1/8	2.484±.020	.139±.004
-162	5 3/4	5 15/16	3/32	5.767±.035	.103±.003	-231	2 5/8	2 7/8	1/8	2.609±.020	.139±.004
-163	6	6 3/16	3/32	5.987±.035	.103±.003	-232	2 3/4	3	1/8	2.734±.024	.139±.004
-164	6 1/4	6 7/16	3/32	6.237±.040	.103±.003	-233	2 7/8	3 1/8	1/8	2.859±.024	.139±.004
-165	6 1/2	6 11/16	3/32	6.487±.040	.103±.003	-234	3	3 1/4	1/8	2.984±.024	.139±.004
-166	6 3/4	6 15/16	3/32	6.737±.040	.103±.003	-235	3 1/8	3 3/8	1/8	3.109±.024	.139±.004
-167	7	7 3/16	3/32	6.987±.040	.103±.003	-236	3 1/4	3 1/2	1/8	3.234±.024	.139±.004
-168	7 1/4	7 7/16	3/32	7.237±.045	.103±.003	-237	3 3/8	3 5/8	1/8	3.359±.024	.139±.004
-169	7 1/2	7 11/16	3/32	7.487±.045	.103±.003	-238	3 1/2	3 3/4	1/8	3.484±.024	.139±.004
-170	7 3/4	7 15/16	3/32	7.737±.045	.103±.003	-239	3 5/8	3 7/8	1/8	3.609±.028	.139±.004
-171	8	8 3/16	3/32	7.987±.045	.103±.003	-240	3 3/4	4	1/8	3.734±.028	.139±.004
-172	8 1/4	8 7/16	3/32	8.237±.050	.103±.003	-241	3 7/8	4 1/8	1/8	3.859±.028	.139±.004
-173	8 1/2	8 11/16	3/32	8.487±.050	.103±.003	-242	4	4 1/4	1/8	3.984±.028	.139±.004
-174	8 3/4	8 15/16	3/32	8.737±.050	.103±.003	-243	4 1/8	4 3/8	1/8	4.109±.028	.139±.004
-175	9	9 3/16	3/32	8.987±.050	.103±.003	-244	4 1/4	4 1/2	1/8	4.234±.030	.139±.004
-176	9 1/4	9 7/16	3/32	9.237±.055	.103±.003	-245	4 3/8	4 5/8	1/8	4.359±.030	.139±.004
-177	9 1/2	9 11/16	3/32	9.487±.055	.103±.003	-246	4 1/2	4 3/4	1/8	4.484±.030	.139±.004
-178	9 3/4	9 15/16	3/32	9.737±.055	.103±.003	-247	4 5/8	4 7/8	1/8	4.609±.030	.139±.004
-201	3 16	7/16	1/8	.171±.005	.139±.004	-248	4 3/4	5	1/8	4.734±.030	.139±.004
-202	1/4	1/2	1/8	.234±.005	.139±.004	-249	4 7/8	5 1/8	1/8	4.859±.035	.139±.004
-203	5/16	9/16	1/8	.296±.005	.139±.004	-250	5	5 1/4	1/8	4.984±.035	.139±.004
-204	3/8	5/8	1/8	.359±.005	.139±.004	-251	5 1/8	5 3/8	1/8	5.109±.035	.139±.004
-205	7/16	11/16	1/8	.421±.005	.139±.004	-252	5 1/4	5 1/2	1/8	5.234±.035	.139±.004
-206	1/2	3/4	1/8	.484±.005	.139±.004	-253	5 3/8	5 5/8	1/8	5.359±.035	.139±.004
-207	9/16	13/16	1/8	.546±.007	.139±.004	-254	5 1/2	5 3/4	1/8	5.484±.035	.139±.004
-208	5/8	7/8	1/8	.609±.009	.139±.004	-255	5 5/8	5 7/8	1/8	5.609±.035	.139±.004
-209	11/16	15/16	1/8	.671±.009	.139±.004	-256	5 3/4	6	1/8	5.734±.035	.139±.004
-210	3/4	1	1/8	.734±.010	.139±.004	-257	5 7/8	6 1/8	1/8	5.859±.035	.139±.004
-211	13/16	1 1/16	1/8	.796±.010	.139±.004	-258	6	6 1/4	1/8	5.984±.035	.139±.004
-212	7/8	1 1/8	1/8	.859±.010	.139±.004	-259	6 1/4	6 1/2	1/8	6.234±.040	.139±.004
-213	15/16	1 3/16	1/8	.921±.010	.139±.004	-260	6 1/2	6 3/4	1/8	6.484±.040	.139±.004

# O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS		AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	I.D.	O.D.	Width	I.D.Tol.	W. Tol.		I.D.	O.D.	Width	I.D. Tol.	W. Tol.
-261	6 3/4	7	1/8	6.734±.040	.139±.004	-332	2 3/8	2 3/4	3/16	2.350±.018	.210±.005
-262	7	7 1/4	1/8	6.984±.040	.139±.004	-333	2 1/2	2 7/8	3/16	2.475±.020	.210±.005
-263	7 1/4	7 1/2	1/8	7.234±.045	.139±.004	-334	2 5/8	3	3/16	2.600±.020	.210±.005
-264	7 1/2	7 3/4	1/8	7.484±.045	.139±.004	-335	2 3/4	3 1/8	3/16	2.725±.020	.210±.005
-265	7 3/4	8	1/8	7.734±.045	.139±.004	-336	2 7/8	3 1/4	3/16	2.850±.020	.210±.005
-266	8	8 1/4	1/8	7.984±.045	.139±.004	-337	3	3-3/8	3/16	2.975±.024	.210±.005
-267	8 1/4	8 1/2	1/8	8.234±.050	.139±.004	-338	3-1/8	3-1/2	3/16	3.100±.024	.210±.005
-268	8 1/2	8 3/4	1/8	8.484±.050	.139±.004	-339	3-1/4	3-5/8	3/16	3.225±.024	.210±.005
-269	8 3/4	9	1/8	8.734±.050	.139±.004	-340	3-3/8	3-3/4	3/16	3.350±.024	.210±.005
-270	9	9 1/4	1/8	8.984±.050	.139±.004	-341	3-1/2	3-7/8	3/16	3.475±.024	.210±.005
-271	9 1/4	9 1/2	1/8	9.234±.055	.139±.004	-342	3 5/8	4	3/16	3.600±.028	.210±.005
-272	9 1/2	9 3/4	1/8	9.484±.055	.139±.004	-343	3 3/4	4 1/8	3/16	3.725±.028	.210±.005
-273	9 3/4	10	1/8	9.734±.055	.139±.004	-344	3 7/8	4 1/4	3/16	3.850±.028	.210±.005
-274	10	10 1/4	1/8	9.984±.055	.139±.004	-345	4	4 3/8	3/16	3.975±.028	.210±.005
-275	10 1/2	10 3/4	1/8	10.484±.055	.139±.004	-346	4 1/8	4 1/2	3/16	4.100±.028	.210±.005
-276	11	11 1/4	1/8	10.984±.065	.139±.004	-347	4 1/4	4 5/8	3/16	4.225±.030	.210±.005
-277	11 1/2	11 3/4	1/8	11.484±.065	.139±.004	-348	4 3/8	4 3/4	3/16	4.350±.030	.210±.005
-278	12	12 1/4	1/8	11.984±.065	.139±.004	-349	4 1/2	4 7/8	3/16	4.475±.030	.210±.005
-279	13	13 1/4	1/8	12.984±.065	.139±.004	-350	4 5/8	5	3/16	4.600±.030	.210±.005
-280	14	14 1/4	1/8	13.984±.065	.139±.004	-351	4 3/4	5 1/8	3/16	4.725±.030	.210±.005
-281	15	15 1/4	1/8	14.984±.065	.139±.004	-352	4 7/8	5 1/4	3/16	4.850±.030	.210±.005
-282	16	16 1/4	1/8	15.955±.075	.139±.004	-353	5	5 3/8	3/16	4.975±.037	.210±.005
-283	17	17 1/4	1/8	16.955±.080	.139±.004	-354	5 1/8	5 1/2	3/16	5.100±.037	.210±.005
-284	18	18 1/4	1/8	17.955±.085	.139±.004	-355	5 1/4	5 5/8	3/16	5.225±.037	.210±.005
-309	7/16	13/16	3/16	.412±.005	.210±.005	-356	5 3/8	5 3/4	3/16	5.350±.037	.210±.005
-310	1/2	7/8	3/16	.475±.005	.210±.005	-357	5 1/2	5 7/8	3/16	5.475±.037	.210±.005
-311	9/16	15/16	3/16	.537±.007	.210±.005	-358	5 5/8	6	3/16	5.600±.037	.210±.005
-312	5/8	1	3/16	.600±.009	.210±.005	-359	5 3/4	6 1/8	3/16	5.725±.037	.210±.005
-313	11/16	11/16	3/16	.662±.009	.210±.005	-360	5 7/8	6 1/4	3/16	5.850±.037	.210±.005
-314	3/4	1 1/8	3/16	.725±.010	.210±.005	-361	6	6 3/8	3/16	5.975±.037	.210±.005
-315	13/16	1 3/16	3/16	.787±.010	.210±.005	-362	6 1/4	6 5/8	3/16	6.225±.040	.210±.005
-316	7/8	1 1/4	3/16	.850±.010	.210±.005	-363	6 1/2	6 7/8	3/16	6.475±.040	.210±.005
-317	15/16	1 5/16	3/16	.912±.010	.210±.005	-364	6 3/4	7 1/8	3/16	6.725±.040	.210±.005
-318	1	1 3/8	3/16	.975±.010	.210±.005	-365	7	7 3/8	3/16	6.975±.040	.210±.005
-319	1 1/16	1 7/16	3/16	1.037±.010	.210±.005	-366	7 1/4	7 5/8	3/16	7.225±.045	.210±.005
-320	1 1/8	1 1/2	3/16	1.100±.012	.210±.005	-367	7 1/2	7 7/8	3/16	7.475±.045	.210±.005
-321	1 3/16	1 9/16	3/16	1.162±.012	.210±.005	-368	7 3/4	8 1/8	3/16	7.725±.045	.210±.005
-322	1 1/4	1 5/8	3/16	1.225±.012	.210±.005	-369	8	8 3/8	3/16	7.975±.045	.210±.005
-323	1 5/16	1 11/16	3/16	1.287±.012	.210±.005	-370	8 1/4	8 5/8	3/16	8.225±.050	.210±.005
-324	1 3/8	1 3/4	3/16	1.350±.012	.210±.005	-371	8 1/2	8 7/8	3/16	8.475±.050	.210±.005
-325	1 1/2	1 7/8	3/16	1.475±.015	.210±.005	-372	8 3/4	9 1/8	3/16	8.725±.050	.210±.005
-326	1 5/8	2	3/16	1.600±.015	.210±.005	-373	9	9 3/8	3/16	8.975±.050	.210±.005
-327	1 3/4	2 1/8	3/16	1.725±.015	.210±.005	-374	9 1/4	9 5/8	3/16	9.225±.055	.210±.005
-328	1 7/8	2 1/4	3/16	1.850±.015	.210±.005	-375	9 1/2	9 7/8	3/16	9.475±.055	.210±.005
-329	2	2 3/8	3/16	1.975±.018	.210±.005	-376	9 3/4	10 1/8	3/16	9.725±.055	.210±.005
-330	2 1/8	2 1/2	3/16	2.100±.018	.210±.005	-377	10	10 3/8	3/16	9.975±.055	.210±.005
-331	2 1/4	2 5/8	3/16	2.225±.018	.210±.005	-378	10 1/2	10 7/8	3/16	10.475±.060	.210±.005

# O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS		AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	I.D.	O.D.	Width	I.D. Tol.	W. Tol.		I.D.	O.D.	Width	I.D. Tol.	W. Tol.
-379	11	11 3/8	3/16	10.975±.060	.210±.005	-430	5 1/8	5 5/8	1/4	5.100±.037	.275±.006
-380	11 1/2	11 7/8	3/16	11.475±.065	.210±.005	-431	5 1/4	5 3/4	1/4	5.225±.037	.275±.006
-381	12	12 3/8	3/16	11.975±.065	.210±.005	-432	5 3/8	5 7/8	1/4	5.350±.037	.275±.006
-382	13	13 3/8	3/16	12.975±.065	.210±.005	-433	5 1/2	6	1/4	5.475±.037	.275±.006
-383	14	14 3/8	3/16	13.975±.070	.210±.005	-434	5 5/8	6 1/8	1/4	5.600±.037	.275±.006
-384	15	15 3/8	3/16	14.975±.070	.210±.005	-435	5 3/4	6 1/4	1/4	5.725±.037	.275±.006
-385	16	16 3/8	3/16	15.955±.075	.210±.005	-436	5 7/8	6 3/8	1/4	5.850±.037	.275±.006
-386	17	17 3/8	3/16	16.955±.080	.210±.005	-437	6	6 1/2	1/4	5.975±.037	.275±.006
-387	18	18 3/8	3/16	17.955±.085	.210±.005	-438	6 1/4	6 3/4	1/4	6.225±.040	.275±.006
-388	19	19 3/8	3/16	18.955±.090	.210±.005	-439	6 1/2	7	1/4	6.475±.040	.275±.006
-389	20	20 3/8	3/16	19.995±.095	.210±.005	-440	6 3/4	7 1/4	1/4	6.725±.040	.275±.006
-390	21	21 3/8	3/16	20.955±.095	.210±.005	-441	7	7 1/2	1/4	6.975±.040	.275±.006
-391	22	22 3/8	3/16	21.955±.100	.210±.005	-442	7 1/4	7 3/4	1/4	7.225±.045	.275±.006
-392	23	23 3/8	3/16	22.940±.105	.210±.005	-443	7 1/2	8	1/4	7.475±.045	.275±.006
-393	24	24 3/8	3/16	23.940±.110	.210±.005	-444	7 3/4	8 1/4	1/4	7.725±.045	.275±.006
-394	25	25 3/8	3/16	24.940±.115	.210±.005	-445	8	8 1/2	1/4	7.975±.045	.275±.006
-395	26	26 3/8	3/16	25.940±.120	.210±.005	-446	8 1/2	9	1/4	8.475±.055	.275±.006
-400*	1-3/8	1-7/8	1/4	1.225±.012	.275±.006	-447	9	9 1/2	1/4	8.975±.055	.275±.006
-401*	1-1/2	2	1/4	1.475±.014	.275±.006	-448	9 1/2	10	1/4	9.475±.055	.275±.006
-402*	1-5/8	2-1/8	1/4	1.600±.015	.275±.006	-449	10	10 1/2	1/4	9.975±.055	.275±.006
-403*	1-3/4	2-1/4	1/4	1.725±.016	.275±.006	-450	10 1/2	11	1/4	10.475±.060	.275±.006
-404*	1-7/8	2-3/8	1/4	1.850±.016	.275±.006	-451	11	11 1/2	1/4	10.975±.060	.275±.006
-405*	2	2-1/2	1/4	1.975±.017	.275±.006	-452	11 1/2	12	1/4	11.475±.060	.275±.006
-406*	2-1/8	2-5/8	1/4	2.100±.018	.275±.006	-453	12	12 1/2	1/4	11.975±.060	.275±.006
-407*	2-1/4	2-3/4	1/4	2.225±.018	.275±.006	-454	12 1/2	13	1/4	12.475±.060	.275±.006
-408*	2-3/8	2-7/8	1/4	2.350±.020	.275±.006	-455	13	13 1/2	1/4	12.975±.060	.275±.006
-409*	2-1/2	3	1/4	2.475±.020	.275±.006	-456	13 1/2	14	1/4	13.475±.070	.275±.006
-410*	2-5/8	3-1/8	1/4	2.600±.020	.275±.006	-457	14	14 1/2	1/4	13.975±.070	.275±.006
-411*	2-3/4	3-1/4	1/4	2.725±.022	.275±.006	-458	14 1/2	15	1/4	14.475±.070	.275±.006
-412*	2-7/8	3-3/8	1/4	2.850±.022	.275±.006	-459	15	15 1/2	1/4	14.975±.070	.275±.006
-413*	3	3-1/2	1/4	2.975±.024	.275±.006	-460	15 1/2	16	1/4	15.475±.070	.275±.006
-414*	3-1/8	3-5/8	1/4	3.100±.024	.275±.006	-461	16	16 1/2	1/4	15.955±.075	.275±.006
-415*	3-1/4	3-3/4	1/4	3.225±.024	.275±.006	-462	16 1/2	17	1/4	16.455±.075	.275±.006
-416*	3-3/8	3-7/8	1/4	3.350±.026	.275±.006	-463	17	17 1/2	1/4	16.955±.080	.275±.006
-417*	3-1/2	4	1/4	3.475±.026	.275±.006	-464	17 1/2	18	1/4	17.455±.085	.275±.006
-418*	3-5/8	4-1/8	1/4	3.600±.026	.275±.006	-465	18	18 1/2	1/4	17.955±.085	.275±.006
-419*	3-3/4	4-1/4	1/4	3.725±.028	.275±.006	-466	18 1/2	19	1/4	18.455±.085	.275±.006
-420*	3-7/8	4-3/8	1/4	3.850±.028	.275±.006	-467	19	19 1/2	1/4	18.955±.090	.275±.006
-421*	4	4-1/2	1/4	3.975±.028	.275±.006	-468	19 1/2	20	1/4	19.455±.090	.275±.006
-422*	4-1/8	4-5/8	1/4	4.100±.030	.275±.006	-469	20	20 1/2	1/4	19.955±.090	.275±.006
-423*	4-1/4	4-3/4	1/4	4.225±.030	.275±.006	-470	21	21 1/2	1/4	20.955±.090	.275±.006
-424*	4-3/8	4-7/8	1/4	4.350±.030	.275±.006	-471	22	22 1/2	1/4	21.955±.100	.275±.006
-425	4 1/2	5	1/4	4.475±.033	.275±.006	-472	23	23 1/2	1/4	22.940±.105	.275±.006
-426	4 5/8	5 1/8	1/4	4.600±.033	.275±.006	-473	24	24 1/2	1/4	23.940±.110	.275±.006
-427	4 3/4	5 1/4	1/4	4.725±.033	.275±.006	-474	25	25 1/2	1/4	24.940±.115	.275±.006
-428	4 7/8	5 3/8	1/4	4.850±.033	.275±.006	-475	26	26 1/2	1/4	25.940±.120	.275±.006
-429	5	5 1/2	1/4	4.975±.037	.275±.006						

\* NON-ANSI STANDARD

# STYLE 568, 70 DURO BUNA-N O-RINGS

Reduced prices available for bulk quantity purchases of 70 Durometer O-Rings on pages 161 and 162.



## SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-001	50	\$ 0.06	568-040	20	\$ 0.46	568-131	20	\$ 0.26	568-171	1	\$ 2.74
568-001-1/2	50	0.20	568-041	20	0.53	568-132	20	0.26	568-172	1	2.84
568-002	50	0.06	568-042	20	0.57	568-133	20	0.27	568-173	1	3.05
568-003	50	0.06	568-043	20	0.60	568-134	20	0.27	568-174	1	3.35
568-004	50	0.06	568-044	10	0.72	568-135	20	0.27	568-175	1	3.65
568-005	50	0.06	568-045	10	0.73	568-136	20	0.29	568-176	1	3.95
568-006	50	0.03	568-046	10	0.79	568-137	20	0.29	568-177	1	4.08
568-007	50	0.03	568-047	10	0.88	568-138	20	0.33	568-178	1	4.27
568-008	50	0.03	568-048	10	1.03	568-139	20	0.33	568-201	50	0.06
568-009	50	0.03	568-049	10	1.34	568-140	20	0.33	568-202	50	0.06
568-010	50	0.06	568-050	10	1.34	568-141	20	0.39	568-203	50	0.07
568-011	50	0.06	568-102	50	0.09	568-142	20	0.39	568-204	50	0.07
568-012	50	0.06	568-103	50	0.09	568-143	20	0.39	568-205	50	0.07
568-013	50	0.06	568-104	50	0.06	568-144	20	0.43	568-206	50	0.09
568-014	50	0.06	568-105	50	0.06	568-145	20	0.43	568-207	50	0.09
568-015	50	0.07	568-106	50	0.06	568-146	20	0.43	568-208	50	0.10
568-016	50	0.07	568-107	50	0.06	568-147	20	0.43	568-209	50	0.10
568-017	50	0.09	568-108	50	0.11	568-148	20	0.43	568-210	50	0.10
568-018	50	0.09	568-109	50	0.06	568-149	20	0.45	568-211	50	0.11
568-019	50	0.10	568-110	50	0.07	568-150	20	0.45	568-212	50	0.11
568-020	50	0.10	568-111	50	0.07	568-151	20	0.49	568-213	50	0.11
568-021	50	0.10	568-112	50	0.07	568-152	20	0.57	568-214	50	0.16
568-022	50	0.10	568-113	50	0.07	568-153	20	0.60	568-215	50	0.17
568-023	50	0.11	568-114	50	0.09	568-154	20	0.60	568-216	50	0.17
568-024	50	0.11	568-115	50	0.09	568-155	10	0.79	568-217	50	0.19
568-025	50	0.16	568-116	50	0.09	568-156	10	0.98	568-218	50	0.19
568-026	50	0.17	568-117	50	0.09	568-157	10	1.01	568-219	50	0.19
568-027	50	0.17	568-118	50	0.10	568-158	10	1.03	568-220	20	0.20
568-028	20	0.17	568-119	50	0.10	568-159	10	1.12	568-221	20	0.22
568-029	20	0.19	568-120	50	0.10	568-160	5	1.21	568-222	20	0.24
568-030	20	0.22	568-121	50	0.11	568-161	5	1.34	568-223	20	0.27
568-031	20	0.24	568-122	50	0.11	568-162	5	1.58	568-224	20	0.50
568-032	20	0.27	568-123	50	0.11	568-163	5	1.64	568-225	20	0.30
568-033	20	0.33	568-124	50	0.17	568-164	5	1.82	568-226	20	0.36
568-034	20	0.36	568-125	50	0.17	568-165	5	1.88	568-227	20	0.36
568-035	20	0.36	568-126	20	0.19	568-166	5	1.88	568-228	20	0.39
568-036	20	0.39	568-127	20	0.20	568-167	5	1.88	568-229	20	0.43
568-037	20	0.39	568-128	20	0.22	568-168	5	2.07	568-230	20	0.46
568-038	20	0.43	568-129	20	0.22	568-169	5	2.13	568-231	20	0.49
568-039	20	0.45	568-130	20	0.24	568-170	5	2.20	568-232	20	0.49

# STYLE 568, 70 DURO BUNA-N O-RINGS

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-233	20	\$ 0.52	568-283	1	\$ 8.53	568-357	5	\$ 1.88	568-436	5	\$ 2.13
568-234	20	0.55	568-284	1	9.74	568-358	5	2.01	568-437	5	2.30
568-235	20	0.57	568-309	50	0.16	568-359	5	2.01	568-438	5	2.44
568-236	20	0.60	568-310	50	0.17	568-360	5	2.13	568-439	5	2.56
568-237	20	0.60	568-311	50	0.17	568-361	5	2.20	568-440	1	2.74
568-238	20	0.65	568-312	50	0.20	568-362	5	2.26	568-441	1	2.99
568-239	20	0.65	568-313	50	0.20	568-363	5	2.34	568-442	1	3.05
568-240	20	0.66	568-314	50	0.20	568-364	5	2.44	568-443	1	3.16
568-241	20	0.68	568-315	50	0.22	568-365	5	2.56	568-444	1	3.35
568-242	10	0.73	568-316	50	0.22	568-366	5	2.56	568-445	1	3.48
568-243	10	0.79	568-317	50	0.22	568-367	5	2.56	568-446	1	3.59
568-244	10	0.82	568-318	50	0.22	568-368	5	2.56	568-447	1	3.78
568-245	10	0.92	568-319	50	0.26	568-369	1	2.84	568-448	1	3.78
568-246	10	1.03	568-320	20	0.27	568-370	1	3.16	568-449	1	3.78
568-247	10	1.06	568-321	20	0.27	568-371	1	3.29	568-450	1	4.57
568-248	10	1.09	568-322	20	0.27	568-372	1	3.35	568-451	1	4.75
568-249	10	1.16	568-323	20	0.27	568-373	1	3.65	568-452	1	5.17
568-250	10	1.16	568-324	20	0.27	568-374	1	3.72	568-453	1	5.49
568-251	10	1.21	568-325	20	0.30	568-375	1	3.78	568-454	1	5.79
568-252	10	1.21	568-326	20	0.30	568-376	1	3.84	568-455	1	7.31
568-253	10	1.28	568-327	20	0.39	568-377	1	3.84	568-456	1	7.31
568-254	5	1.41	568-328	20	0.43	568-378	1	4.87	568-457	1	7.31
568-255	5	1.47	568-329	20	0.46	568-379	1	5.17	568-458	1	7.31
568-256	5	1.52	568-330	20	0.52	568-380	1	5.30	568-459	1	7.56
568-257	5	1.58	568-331	20	0.55	568-381	1	5.49	568-460	1	7.91
568-258	5	1.64	568-332	20	0.60	568-382	1	5.49	568-461	1	8.83
568-259	5	1.82	568-333	20	0.66	568-383	1	7.31	568-462	1	9.14
568-260	5	1.82	568-334	20	0.68	568-384	1	7.31	568-463	1	9.74
568-261	5	1.95	568-335	10	0.73	568-385	1	8.53	568-464	1	10.36
568-262	5	2.01	568-336	10	0.79	568-386	1	9.14	568-465	1	11.58
568-263	5	2.20	568-337	10	0.82	568-387	1	10.36	568-466	1	11.58
568-264	5	2.26	568-338	10	0.82	568-388	1	10.66	568-467	1	11.58
568-265	5	2.44	568-339	10	0.92	568-389	1	10.66	568-468	1	12.18
568-266	5	2.50	568-340	10	0.98	568-390	1	10.66	568-469	1	12.17
568-267	5	2.56	568-341	10	0.98	568-391	1	10.96	568-470	1	12.20
568-268	1	2.80	568-342	10	1.06	568-392	1	10.96	568-471	1	12.33
568-269	1	3.05	568-343	10	1.09	568-393	1	17.65	568-472	1	12.40
568-270	1	3.05	568-344	10	1.09	568-394	1	17.67	568-473	1	12.47
568-271	1	3.05	568-345	10	1.21	568-395	1	19.49	568-474	1	12.60
568-272	1	3.05	568-346	10	1.21	568-425	5	1.52	568-475	1	12.74
568-273	1	3.05	568-347	10	1.21	568-426	5	1.52			
568-274	1	3.05	568-348	10	1.21	568-427	5	1.52			
568-275	1	3.35	568-349	10	1.34	568-428	5	1.64			
568-276	1	3.65	568-350	5	1.41	568-429	5	1.71			
568-277	1	3.65	568-351	5	1.41	568-430	5	1.71			
568-278	1	3.95	568-352	5	1.47	568-431	5	1.95			
568-279	1	4.87	568-353	5	1.52	568-432	5	1.98			
568-280	1	5.98	568-354	5	1.64	568-433	5	1.98			
568-281	1	7.01	568-355	5	1.82	568-434	5	2.01			
568-282	1	7.61	568-356	5	1.82	568-435	5	2.13			

# STYLE 568, BULK 70 DURO BUNA-N O-RINGS

Standard size packages available on pages 159 and 160.



## SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-001-B	1000	\$ 0.05	568-041-B	400	\$ 0.51	568-132-B	400	\$ 0.25	568-172-B	100	\$ 2.73
568-002-B	1000	0.05	568-042-B	400	0.56	568-133-B	400	0.26	568-173-B	100	2.92
568-003-B	1000	0.05	568-043-B	400	0.58	568-134-B	400	0.26	568-174-B	100	3.21
568-004-B	1000	0.05	568-044-B	400	0.69	568-135-B	400	0.26	568-175-B	100	3.51
568-005-B	1000	0.05	568-045-B	400	0.70	568-136-B	400	0.28	568-176-B	100	3.78
568-006-B	1000	0.03	568-046-B	200	0.76	568-137-B	400	0.28	568-177-B	100	3.91
568-007-B	1000	0.03	568-047-B	200	0.84	568-138-B	400	0.32	568-178-B	100	4.09
568-008-B	1000	0.03	568-048-B	200	0.99	568-139-B	400	0.32	568-201-B	1000	0.05
568-009-B	1000	0.03	568-049-B	200	1.29	568-140-B	400	0.32	568-202-B	1000	0.05
568-010-B	1000	0.05	568-050-B	200	1.29	568-141-B	400	0.37	568-203-B	1000	0.07
568-011-B	1000	0.05	568-102-B	1000	0.08	568-142-B	400	0.37	568-204-B	1000	0.07
568-012-B	1000	0.05	568-103-B	1000	0.08	568-143-B	400	0.37	568-205-B	1000	0.07
568-013-B	1000	0.05	568-104-B	1000	0.05	568-144-B	400	0.41	568-206-B	1000	0.08
568-014-B	1000	0.05	568-105-B	1000	0.05	568-145-B	400	0.41	568-207-B	1000	0.08
568-015-B	1000	0.07	568-106-B	1000	0.05	568-146-B	400	0.41	568-208-B	1000	0.10
568-016-B	1000	0.07	568-107-B	1000	0.05	568-147-B	400	0.41	568-209-B	1000	0.10
568-017-B	1000	0.08	568-108-B	1000	0.11	568-148-B	400	0.41	568-210-B	1000	0.10
568-018-B	1000	0.08	568-109-B	1000	0.05	568-149-B	400	0.42	568-211-B	1000	0.11
568-019-B	1000	0.10	568-110-B	1000	0.07	568-150-B	400	0.42	568-212-B	1000	0.11
568-020-B	1000	0.10	568-111-B	1000	0.07	568-151-B	400	0.47	568-213-B	1000	0.11
568-021-B	1000	0.10	568-112-B	1000	0.07	568-152-B	400	0.56	568-214-B	1000	0.15
568-022-B	1000	0.10	568-113-B	1000	0.07	568-153-B	400	0.58	568-215-B	1000	0.16
568-023-B	1000	0.11	568-114-B	1000	0.08	568-154-B	400	0.58	568-216-B	1000	0.16
568-024-B	1000	0.11	568-115-B	1000	0.08	568-155-B	200	0.76	568-217-B	1000	0.18
568-025-B	1000	0.15	568-116-B	1000	0.08	568-156-B	200	0.93	568-218-B	1000	0.18
568-026-B	1000	0.16	568-117-B	1000	0.08	568-157-B	200	0.96	568-219-B	1000	0.18
568-027-B	1000	0.16	568-118-B	1000	0.10	568-158-B	200	0.99	568-220-B	400	0.19
568-028-B	400	0.16	568-119-B	1000	0.10	568-159-B	200	1.08	568-221-B	400	0.20
568-029-B	400	0.18	568-120-B	1000	0.10	568-160-B	200	1.15	568-222-B	400	0.23
568-030-B	400	0.20	568-121-B	1000	0.11	568-161-B	200	1.29	568-223-B	400	0.26
568-031-B	400	0.23	568-122-B	1000	0.11	568-162-B	200	1.52	568-224-B	400	0.28
568-032-B	400	0.26	568-123-B	1000	0.11	568-163-B	200	1.58	568-225-B	400	0.29
568-033-B	400	0.32	568-124-B	1000	0.16	568-164-B	200	1.75	568-226-B	400	0.35
568-034-B	400	0.35	568-125-B	1000	0.16	568-165-B	200	1.81	568-227-B	400	0.35
568-035-B	400	0.35	568-126-B	400	0.18	568-166-B	200	1.81	568-228-B	400	0.37
568-036-B	400	0.37	568-127-B	400	0.19	568-167-B	200	1.81	568-229-B	400	0.41
568-037-B	400	0.37	568-128-B	400	0.20	568-168-B	200	1.99	568-230-B	400	0.44
568-038-B	400	0.41	568-129-B	400	0.20	568-169-B	200	2.05	568-231-B	400	0.47
568-039-B	400	0.42	568-130-B	400	0.23	568-170-B	200	2.10	568-232-B	400	0.47
568-040-B	400	0.44	568-131-B	400	0.25	568-171-B	100	2.63	568-233-B	400	0.50

# STYLE 568, BULK 70 DURO BUNA-N O-RINGS

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-234-B	400	\$ 0.53	568-284-B	100	\$ 9.35	568-358-B	200	\$ 1.93	568-437-B	200	\$ 2.21
568-235-B	400	0.56	568-309-B	1000	0.15	568-359-B	200	1.93	568-438-B	200	2.34
568-236-B	400	0.58	568-310-B	1000	0.16	568-360-B	200	2.05	568-439-B	200	2.45
568-237-B	400	0.58	568-311-B	1000	0.16	568-361-B	200	2.10	568-440-B	200	2.63
568-238-B	400	0.61	568-312-B	1000	0.19	568-362-B	200	2.16	568-441-B	200	2.86
568-239-B	400	0.61	568-313-B	1000	0.19	568-363-B	200	2.25	568-442-B	200	2.92
568-240-B	400	0.63	568-314-B	1000	0.19	568-364-B	200	2.34	568-443-B	200	3.04
568-241-B	400	0.64	568-315-B	1000	0.20	568-365-B	200	2.45	568-444-B	200	3.21
568-242-B	200	0.70	568-316-B	1000	0.20	568-366-B	200	2.45	568-445-B	100	3.33
568-243-B	200	0.76	568-317-B	1000	0.20	568-367-B	200	2.45	568-446-B	100	3.45
568-244-B	200	0.79	568-318-B	1000	0.20	568-368-B	200	2.45	568-447-B	100	3.62
568-245-B	200	0.88	568-319-B	1000	0.25	568-369-B	100	2.73	568-448-B	100	3.62
568-246-B	200	0.99	568-320-B	1000	0.26	568-370-B	100	3.04	568-449-B	100	3.62
568-247-B	200	1.02	568-321-B	1000	0.26	568-371-B	100	3.16	568-450-B	100	4.38
568-248-B	200	1.05	568-322-B	1000	0.26	568-372-B	100	3.21	568-451-B	100	4.56
568-249-B	200	1.11	568-323-B	1000	0.26	568-373-B	100	3.51	568-452-B	100	4.97
568-250-B	200	1.11	568-324-B	400	0.26	568-374-B	100	3.56	568-453-B	100	5.26
568-251-B	200	1.15	568-325-B	400	0.29	568-375-B	100	3.62	568-454-B	100	5.55
568-252-B	200	1.15	568-326-B	400	0.29	568-376-B	100	3.68	568-455-B	100	7.01
568-253-B	200	1.23	568-327-B	400	0.37	568-377-B	100	3.68	568-456-B	100	7.01
568-254-B	200	1.34	568-328-B	400	0.41	568-378-B	100	4.67	568-457-B	20	7.01
568-255-B	200	1.40	568-329-B	400	0.44	568-379-B	100	4.97	568-458-B	20	7.01
568-256-B	200	1.46	568-330-B	400	0.50	568-380-B	100	5.08	568-459-B	20	7.25
568-257-B	200	1.52	568-331-B	400	0.53	568-381-B	100	5.26	568-460-B	20	7.60
568-258-B	200	1.58	568-332-B	400	0.58	568-382-B	100	5.26	568-461-B	20	8.47
568-259-B	200	1.75	568-333-B	400	0.63	568-383-B	100	7.01	568-462-B	20	8.76
568-260-B	200	1.75	568-334-B	400	0.64	568-384-B	100	7.01	568-463-B	20	9.35
568-261-B	200	1.87	568-335-B	400	0.70	568-385-B	100	8.18	568-464-B	20	9.93
568-262-B	200	1.93	568-336-B	400	0.76	568-386-B	100	8.76	568-465-B	20	11.10
568-263-B	200	2.10	568-337-B	400	0.79	568-387-B	100	9.93	568-466-B	20	11.10
568-264-B	200	2.16	568-338-B	400	0.79	568-388-B	20	10.23	568-467-B	20	11.10
568-265-B	200	2.34	568-339-B	400	0.88	568-389-B	20	10.23	568-468-B	20	11.69
568-266-B	100	2.40	568-340-B	400	0.93	568-390-B	20	10.23	568-469-B	20	11.67
568-267-B	100	2.45	568-341-B	400	0.93	568-391-B	20	10.52	568-470-B	20	11.77
568-268-B	100	2.69	568-342-B	400	1.02	568-392-B	20	10.52	568-471-B	20	11.90
568-269-B	100	2.92	568-343-B	400	1.05	568-393-B	20	16.93	568-472-B	20	11.96
568-270-B	100	2.92	568-344-B	400	1.05	568-394-B	20	16.95	568-473-B	20	12.03
568-271-B	100	2.92	568-345-B	200	1.15	568-395-B	20	18.70	568-474-B	20	12.16
568-272-B	100	2.92	568-346-B	200	1.15	568-425-B	200	1.46	568-475-B	20	12.29
568-273-B	100	2.92	568-347-B	200	1.15	568-426-B	200	1.46			
568-274-B	100	2.92	568-348-B	200	1.15	568-427-B	200	1.46			
568-275-B	100	3.21	568-349-B	200	1.29	568-428-B	200	1.58			
568-276-B	100	3.51	568-350-B	200	1.34	568-429-B	200	1.64			
568-277-B	100	3.51	568-351-B	200	1.34	568-430-B	200	1.64			
568-278-B	100	3.78	568-352-B	200	1.40	568-431-B	200	1.87			
568-279-B	100	4.67	568-353-B	200	1.46	568-432-B	200	1.90			
568-280-B	100	5.73	568-354-B	200	1.58	568-433-B	200	1.90			
568-281-B	100	6.72	568-355-B	200	1.75	568-434-B	200	1.93			
568-282-B	100	7.30	568-356-B	200	1.75	568-435-B	200	2.05			
568-283-B	100	8.18	568-357-B	200	1.81	568-436-B	200	2.05			

## NON-STANDARD 1/4" CROSS SECTION STYLE 568, 70 DURO BUNA-N O-RINGS



### SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	Min. Pkg. Qty.	ID	OD	CS	List Price
568-400	5	1-3/8	1-7/8	1/4	\$ 2.87
568-401	5	1-1/2	2	1/4	2.90
568-402	5	1-5/8	2-1/8	1/4	2.97
568-403	5	1-3/4	2-1/4	1/4	2.98
568-404	5	1-7/8	2-3/8	1/4	3.03
568-405	5	2	2-1/2	1/4	3.08
568-406	5	2-1/8	2-5/8	1/4	3.12
568-407	5	2-1/4	2-3/4	1/4	3.18
568-408	5	2-3/8	2-7/8	1/4	3.22
568-409	5	2-1/2	3	1/4	3.29
568-410	5	2-5/8	3-1/8	1/4	3.34
568-411	5	2-3/4	3-1/4	1/4	3.39
568-412	5	2-7/8	3-3/8	1/4	3.43

Part Number	Min. Pkg. Qty.	ID	OD	CS	List Price
568-413	5	3	3-1/2	1/4	\$ 3.45
568-414	5	3-1/8	3-5/8	1/4	3.50
568-415	5	3-1/4	3-3/4	1/4	3.57
568-416	5	3-3/8	3-7/8	1/4	3.60
568-417	5	3-1/2	4	1/4	3.66
568-418	5	3-5/8	4-1/8	1/4	3.71
568-419	5	3-3/4	4-1/4	1/4	3.74
568-420	5	3-7/8	4-3/8	1/4	3.80
568-421	5	4	4-1/2	1/4	3.88
568-422	5	4-1/8	4-5/8	1/4	3.94
568-423	5	4-1/4	4-3/4	1/4	4.02
568-424	5	4-3/8	4-7/8	1/4	4.14

O-RINGS

## STYLE 568C AND 580C, 70 DURO BUNA-N O-RING CORD



### SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Cord) - (Nominal)

Part Number	Nominal C/S	Actual C/S	List Price
568C-062	1/16 ROUND	.070	\$ 0.58
568C-093	3/32 ROUND	.103	0.69
568C-125	1/8 ROUND	.139	0.79
568C-187	3/16 ROUND	.210	1.00
568C-250	1/4 ROUND	.275	1.17
568C-313	5/16 ROUND	.313	1.63
568C-375	3/8 ROUND	.375	2.57

Part Number	Nominal C/S	Actual C/S	List Price
568C-437	7/16 ROUND	.437	\$ 2.31
568C-500	1/2 ROUND	.500	3.18
580C-093	3/32 SQUARE	.099	0.74
580C-125	1/8 SQUARE	.134	0.93
580C-187	3/16 SQUARE	.203	1.15
580C-250	1/4 SQUARE	.266	1.39

# STYLE 568, 90 DURO BUNA-N O-RINGS

Reduced prices are available for large quantity purchases of 70 & 90 Durometer O-Rings.



## SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (90 Duro.)

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-001-90D	50	\$ 0.15	568-036-90D	20	\$ 0.51	568-122-90D	50	\$ 0.19	568-157-90D	5	\$ 1.57
568-002-90D	50	0.10	568-037-90D	20	0.53	568-123-90D	50	0.20	568-158-90D	5	1.57
568-003-90D	50	0.10	568-038-90D	20	0.54	568-124-90D	50	0.21	568-159-90D	5	1.84
568-004-90D	50	0.10	568-039-90D	20	0.57	568-125-90D	50	0.21	568-160-90D	5	1.94
568-005-90D	50	0.07	568-040-90D	20	0.59	568-126-90D	20	0.23	568-161-90D	5	2.11
568-006-90D	50	0.05	568-041-90D	20	0.68	568-127-90D	20	0.24	568-162-90D	5	2.17
568-007-90D	50	0.07	568-042-90D	10	0.73	568-128-90D	20	0.28	568-163-90D	5	2.28
568-008-90D	50	0.07	568-043-90D	10	0.79	568-129-90D	20	0.28	568-164-90D	5	2.37
568-009-90D	50	0.07	568-044-90D	10	0.89	568-130-90D	20	0.32	568-165-90D	5	2.49
568-010-90D	50	0.07	568-045-90D	10	1.00	568-131-90D	20	0.33	568-166-90D	5	2.64
568-011-90D	50	0.07	568-046-90D	10	1.26	568-132-90D	20	0.33	568-167-90D	5	2.73
568-012-90D	50	0.07	568-047-90D	5	1.31	568-133-90D	20	0.34	568-171-90D	1	3.23
568-013-90D	50	0.08	568-048-90D	5	4.99	568-134-90D	20	0.38	568-173-90D	1	3.44
568-014-90D	50	0.08	568-049-90D	5	1.61	568-135-90D	20	0.42	568-173-90D	1	3.44
568-015-90D	50	0.10	568-050-90D	5	1.77	568-136-90D	20	0.43	568-178-90D	1	3.87
568-016-90D	50	0.10	568-102-90D	50	0.11	568-137-90D	20	0.43	568-201-90D	50	0.10
568-017-90D	50	0.11	568-103-90D	50	0.10	568-138-90D	20	0.46	568-202-90D	50	0.10
568-018-90D	50	0.11	568-104-90D	50	0.07	568-139-90D	20	0.47	568-203-90D	50	0.10
568-019-90D	50	0.15	568-105-90D	50	0.08	568-140-90D	20	0.47	568-204-90D	50	0.10
568-020-90D	50	0.15	568-106-90D	50	0.08	568-141-90D	20	0.47	568-205-90D	50	0.10
568-021-90D	50	0.18	568-107-90D	50	0.08	568-142-90D	20	0.50	568-206-90D	50	0.15
568-022-90D	50	0.18	568-108-90D	50	0.08	568-143-90D	20	0.53	568-207-90D	50	0.15
568-023-90D	50	0.18	568-109-90D	50	0.08	568-144-90D	20	0.53	568-208-90D	50	0.18
568-024-90D	50	0.19	568-110-90D	50	0.08	568-145-90D	20	0.53	568-209-90D	50	0.18
568-025-90D	50	0.20	568-111-90D	50	0.08	568-146-90D	20	0.55	568-210-90D	50	0.19
568-026-90D	50	0.21	568-112-90D	50	0.10	568-147-90D	20	0.55	568-211-90D	50	0.19
568-027-90D	50	0.21	568-113-90D	50	0.10	568-148-90D	20	0.55	568-212-90D	50	0.20
568-028-90D	20	0.21	568-114-90D	50	0.10	568-149-90D	20	0.57	568-213-90D	50	0.21
568-029-90D	20	0.25	568-115-90D	50	0.10	568-150-90D	20	0.64	568-214-90D	50	0.21
568-030-90D	20	0.25	568-116-90D	50	0.11	568-151-90D	20	0.65	568-215-90D	50	0.24
568-031-90D	20	0.32	568-117-90D	50	0.15	568-152-90D	10	0.77	568-216-90D	50	0.24
568-032-90D	20	0.34	568-118-90D	50	0.15	568-153-90D	10	0.79	568-217-90D	50	0.25
568-033-90D	20	0.46	568-119-90D	50	0.18	568-154-90D	10	0.95	568-218-90D	20	0.28
568-034-90D	20	0.47	568-120-90D	50	0.18	568-155-90D	10	1.15	568-219-90D	20	0.30
568-035-90D	20	0.47	568-121-90D	50	0.19	568-156-90D	10	1.28	568-220-90D	20	0.32

# STYLE 568, 90 DURO BUNA-N O-RINGS

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-221-90D	20	\$ 0.32	568-271-90D	1	\$ 5.32	568-348-90D	5	\$ 1.77	568-412-90D	5	\$ 1.38
568-222-90D	20	0.36	568-272-90D	1	5.53	568-349-90D	5	1.78	568-413-90D	5	1.40
568-223-90D	20	0.42	568-273-90D	1	5.69	568-350-90D	5	1.84	568-414-90D	5	1.51
568-224-90D	20	0.44	568-274-90D	1	5.88	568-351-90D	5	1.94	568-415-90D	5	1.57
568-225-90D	20	0.46	568-275-90D	1	5.76	568-352-90D	5	2.00	568-416-90D	5	1.61
568-226-90D	20	0.47	568-276-90D	1	5.81	568-353-90D	5	2.10	568-417-90D	5	1.66
568-227-90D	20	0.53	568-277-90D	1	5.93	568-354-90D	5	2.12	568-418-90D	5	1.71
568-228-90D	20	0.55	568-278-90D	1	5.99	568-355-90D	5	2.29	568-419-90D	5	1.74
568-229-90D	20	0.57	568-279-90D	1	6.10	568-356-90D	5	2.44	568-420-90D	5	2.01
568-230-90D	20	0.61	568-280-90D	1	6.18	568-357-90D	5	2.46	568-421-90D	5	2.05
568-231-90D	20	0.64	568-281-90D	1	6.26	568-358-90D	5	2.65	568-422-90D	5	2.11
568-232-90D	10	0.71	568-282-90D	1	6.44	568-359-90D	5	2.68	568-423-90D	5	2.14
568-233-90D	10	0.72	568-284-90D	1	6.62	568-360-90D	5	2.73	568-424-90D	5	2.15
568-234-90D	10	0.72	568-310-90D	50	0.23	568-361-90D	1	2.83	568-425-90D	5	2.16
568-235-90D	10	0.82	568-311-90D	50	0.24	568-362-90D	1	2.89	568-426-90D	5	2.20
568-236-90D	10	0.84	568-312-90D	50	0.25	568-363-90D	1	2.99	568-427-90D	5	2.26
568-237-90D	10	0.88	568-313-90D	20	0.28	568-364-90D	1	3.10	568-428-90D	5	2.34
568-238-90D	10	0.89	568-315-90D	20	0.30	568-365-90D	1	3.57	568-429-90D	5	2.37
568-239-90D	10	0.97	568-316-90D	20	0.32	568-366-90D	1	3.60	568-430-90D	5	2.45
568-240-90D	10	0.97	568-317-90D	20	0.32	568-367-90D	1	3.62	568-431-90D	5	2.46
568-241-90D	10	1.00	568-318-90D	20	0.33	568-368-90D	1	3.87	568-432-90D	5	2.64
568-242-90D	10	1.04	568-319-90D	20	0.34	568-369-90D	1	4.27	568-433-90D	5	2.66
568-243-90D	10	1.11	568-320-90D	20	0.36	568-370-90D	1	4.31	568-434-90D	5	2.73
568-244-90D	10	1.15	568-321-90D	20	0.43	568-371-90D	1	4.38	568-435-90D	1	2.77
568-245-90D	10	1.28	568-322-90D	20	0.43	568-372-90D	1	4.45	568-436-90D	1	2.87
568-246-90D	5	1.50	568-323-90D	20	0.47	568-373-90D	1	4.64	568-437-90D	1	3.16
568-247-90D	5	1.57	568-324-90D	20	0.47	568-374-90D	1	4.80	568-438-90D	1	3.23
568-248-90D	5	1.58	568-325-90D	20	0.47	568-375-90D	1	4.96	568-439-90D	1	3.39
568-249-90D	5	1.58	568-326-90D	20	0.47	568-376-90D	1	5.43	568-440-90D	1	3.42
568-250-90D	5	1.66	568-327-90D	20	0.50	568-377-90D	1	5.60	568-441-90D	1	3.73
568-251-90D	5	1.68	568-328-90D	20	0.53	568-378-90D	1	6.12	568-442-90D	1	3.94
568-252-90D	5	1.85	568-329-90D	20	0.64	568-379-90D	1	6.48	568-443-90D	1	4.19
568-253-90D	5	1.94	568-330-90D	20	0.68	568-380-90D	1	6.56	568-444-90D	1	4.36
568-254-90D	5	2.11	568-331-90D	10	0.71	568-381-90D	1	6.90	568-445-90D	1	4.57
568-255-90D	5	2.12	568-332-90D	10	0.76	568-382-90D	1	7.05	568-446-90D	1	4.77
568-256-90D	5	2.27	568-333-90D	10	0.84	568-383-90D	1	7.28	568-447-90D	1	4.88
568-257-90D	5	2.61	568-334-90D	10	0.88	568-384-90D	1	7.36	568-448-90D	1	5.00
568-258-90D	5	2.64	568-335-90D	10	0.96	568-385-90D	1	7.56	568-449-90D	1	5.78
568-259-90D	5	2.69	568-336-90D	10	1.00	568-387-90D	1	7.65	568-450-90D	1	7.02
568-260-90D	1	2.81	568-337-90D	10	1.04	568-401-90D	5	0.73	568-451-90D	1	7.54
568-261-90D	1	2.91	568-338-90D	10	1.14	568-402-90D	5	0.78	568-452-90D	1	9.88
568-262-90D	1	3.18	568-339-90D	10	1.20	568-403-90D	5	0.90	568-453-90D	1	10.23
568-263-90D	1	3.44	568-340-90D	10	1.23	568-404-90D	5	0.96	568-454-90D	1	13.83
568-264-90D	1	3.65	568-341-90D	10	1.30	568-405-90D	5	1.01	568-456-90D	1	10.51
568-265-90D	1	3.84	568-342-90D	10	1.36	568-406-90D	5	1.05	568-457-90D	1	10.70
568-266-90D	1	3.94	568-343-90D	10	1.38	568-407-90D	5	1.05	568-458-90D	1	10.88
568-267-90D	1	4.45	568-344-90D	5	1.40	568-408-90D	5	1.13	568-459-90D	1	10.97
568-268-90D	1	4.57	568-345-90D	5	1.47	568-409-90D	5	1.24	568-460-90D	1	11.25
568-269-90D	1	4.84	568-346-90D	5	1.48	568-410-90D	5	1.27	568-461-90D	1	12.89
568-270-90D	1	5.09	568-347-90D	5	1.60	568-411-90D	5	1.31	568-462-90D	1	13.04

## STYLE 568, 90 DURO BUNA-N O-RINGS

Part Number	Min. Pkg. Qty.	List Price
568-463-90D	1	\$ 13.25
568-464-90D	1	13.42
568-466-90D	1	14.55

Part Number	Min. Pkg. Qty.	List Price
568-467-90D	1	\$ 15.13
568-468-90D	1	15.72
568-469-90D	1	16.29

Part Number	Min. Pkg. Qty.	List Price
568-471-90D	1	\$ 18.10
568-472-90D	1	22.14
568-473-90D	1	23.84

Part Number	Min. Pkg. Qty.	List Price
568-474-90D	1	\$ 25.34
568-475-90D	1	25.64

## STYLE 568, 90 DURO BUNA-N O-RING BOSS GASKETS FOR STRAIGHT THREAD FITTINGS

AS-568A UNIVERSAL SERIES DASH NO.	TUBE SIZE (O.D.) INCHES	ACTUAL SIZE	
		I.D.	W.
-901	3/32	.185 ±.005	.056 ±.003
-902	1/8	.239 ±.005	.064 ±.003
-903	3/16	.301 ±.005	.064 ±.003
-904	1/4	.351 ±.005	.072 ±.003
-905	5/16	.414 ±.005	.072 ±.003
-906	3/8	.468 ±.005	.078 ±.003
-907	7/16	.530 ±.005	.082 ±.003
-908	1/2	.644 ±.009	.087 ±.003
-909	9/16	.706 ±.009	.097 ±.003
-910	5/8	.755 ±.009	.097 ±.003
-911	11/16	.863 ±.009	.116 ±.004
-912	3/4	.924 ±.009	.116 ±.004
-913	13/16	.986 ±.010	.116 ±.004
-914	7/8	1.047 ±.010	.116 ±.004
-916	1	1.171 ±.010	.116 ±.004
-918	1-1/8	1.355 ±.012	.116 ±.004
-920	1-1/4	1.475 ±.012	.118 ±.004
-924	1-1/2	1.720 ±.014	.118 ±.004
-928	1-3/4	2.090 ±.018	.118 ±.004
-932	2	2.337 ±.018	.118 ±.004

SEAL INFORMATION	
MATERIAL	90 DUROMETER BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PART NUMBER	(Prefix) - (Dash No.)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-901	50	\$ 0.11	568-911	50	\$ 0.20
568-902	50	0.11	568-912	50	0.23
568-903	50	0.11	568-913	20	0.25
568-904	50	0.16	568-914	20	0.27
568-905	50	0.16	568-916	20	0.30
568-906	50	0.16	568-918	20	0.34
568-907	50	0.16	568-920	20	0.38
568-908	50	0.18	568-924	10	0.55
568-909	50	0.18	568-928	10	0.67
568-910	50	0.19	568-932	10	0.73

# STYLE 568, 75 DURO FLUOROCARBON O-RINGS



## SEAL INFORMATION

MATERIAL	BROWN FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix)-(Dash No.)-(Fluorocarbon)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-001V	56	\$ 0.19	568-039V	3	\$ 1.24	568-129V	5	\$ 0.88	568-167V	1	\$ 6.33
568-002V	50	0.19	568-040V	3	1.28	568-130V	5	0.93	568-168V	1	6.64
568-003V	14	0.19	568-041V	3	1.47	568-131V	3	0.93	568-169V	1	7.03
568-004V	14	0.19	568-042V	3	1.72	568-132V	4	0.95	568-170V	1	8.20
568-005V	9	0.19	568-043V	3	1.86	568-133V	4	1.00	568-171V	1	8.58
568-006V	40	0.19	568-044V	3	1.99	568-134V	3	1.00	568-172V	1	8.98
568-007V	40	0.19	568-045V	2	2.17	568-135V	3	1.04	568-173V	1	8.50
568-008V	40	0.19	568-046V	2	2.27	568-136V	3	1.12	568-174V	1	9.18
568-009V	30	0.19	568-047V	2	2.53	568-137V	4	1.14	568-175V	1	9.53
568-010V	30	0.19	568-048V	2	2.62	568-138V	3	1.19	568-176V	1	10.16
568-011V	30	0.19	568-049V	2	3.42	568-139V	2	1.23	568-177V	1	10.35
568-012V	20	0.20	568-050V	1	3.66	568-140V	2	1.27	568-178V	1	10.86
568-013V	20	0.22	568-102V	50	0.23	568-141V	3	1.30	568-201V	15	0.42
568-014V	20	0.22	568-104V	15	0.24	568-142V	3	1.30	568-202V	15	0.44
568-015V	20	0.25	568-105V	27	0.25	568-143V	2	1.36	568-203V	10	0.47
568-016V	20	0.25	568-106V	15	0.24	568-144V	3	1.36	568-204V	10	0.48
568-017V	15	0.25	568-107V	15	0.24	568-145V	2	1.41	568-205V	8	0.48
568-018V	15	0.25	568-108V	15	0.25	568-146V	2	1.46	568-206V	8	0.49
568-019V	15	0.28	568-109V	15	0.27	568-147V	3	1.48	568-207V	10	0.53
568-020V	15	0.30	568-110V	15	0.28	568-148V	3	1.54	568-208V	7	0.53
568-021V	15	0.32	568-111V	15	0.30	568-149V	2	1.58	568-209V	6	0.56
568-022V	15	0.35	568-112V	15	0.35	568-150V	2	1.68	568-210V	5	0.59
568-023V	15	0.35	568-113V	15	0.35	568-151V	2	1.84	568-211V	5	0.65
568-024V	15	0.43	568-114V	15	0.35	568-152V	2	2.04	568-212V	5	0.69
568-025V	8	0.43	568-115V	10	0.41	568-153V	5	2.23	568-213V	5	0.76
568-026V	10	0.47	568-116V	10	0.43	568-154V	2	2.44	568-214V	5	0.83
568-027V	10	0.48	568-117V	10	0.46	568-155V	2	2.54	568-215V	4	0.88
568-028V	10	0.54	568-118V	10	0.47	568-156V	2	2.83	568-216V	5	0.93
568-029V	10	0.61	568-119V	10	0.51	568-157V	1	3.11	568-217V	3	0.93
568-030V	5	0.65	568-120V	10	0.54	568-158V	2	3.29	568-218V	3	1.00
568-031V	5	0.74	568-121V	10	0.59	568-159V	1	3.60	568-219V	3	1.06
568-032V	5	0.87	568-122V	10	0.65	568-160V	1	4.12	568-220V	3	1.13
568-033V	5	0.94	568-123V	10	0.69	568-161V	1	4.54	568-221V	3	1.17
568-034V	3	0.94	568-124V	10	0.69	568-162V	1	4.88	568-222V	3	1.24
568-035V	3	0.96	568-125V	5	0.72	568-163V	1	5.27	568-223V	3	1.31
568-036V	3	1.11	568-126V	5	0.76	568-164V	1	5.58	568-224V	3	1.45
568-037V	3	1.13	568-127V	5	0.78	568-165V	1	6.14	568-225V	3	1.57
568-038V	3	1.17	568-128V	5	0.83	568-166V	1	6.25	568-226V	3	1.76

# STYLE 568, 75 DURO FLUOROCARBON O-RINGS

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-227V	2	\$ 1.86	568-277V	1	\$ 14.19	568-352V	1	\$ 8.43	568-434V	1	\$ 14.07
568-228V	3	1.94	568-278V	1	14.60	568-353V	1	9.18	568-435V	1	14.25
568-229V	2	2.05	568-279V	1	15.33	568-354V	1	9.20	568-436V	1	15.57
568-230V	2	2.15	568-280V	1	15.60	568-355V	1	9.29	568-437V	1	14.97
568-231V	2	2.28	568-281V	1	16.46	568-356V	1	10.35	568-438V	1	15.54
568-232V	2	2.35	568-282V	1	17.95	568-357V	1	10.74	568-439V	1	16.26
568-233V	2	2.46	568-284V	1	20.45	568-358V	1	11.13	568-440V	1	16.76
568-234V	2	2.63	568-309V	3	1.39	568-359V	1	12.00	568-441V	1	17.95
568-235V	2	2.75	568-310V	3	1.46	568-360V	1	12.80	568-442V	1	19.53
568-236V	2	2.86	568-311V	3	1.58	568-361V	1	13.68	568-443V	1	20.68
568-237V	2	2.98	568-312V	3	1.64	568-362V	1	14.32	568-444V	1	20.31
568-238V	2	3.11	568-313V	3	1.68	568-363V	1	14.37	568-445V	1	22.02
568-239V	2	3.21	568-314V	3	1.75	568-364V	1	14.42	568-446V	1	23.16
568-240V	2	3.29	568-315V	3	1.81	568-365V	1	14.83	568-447V	1	24.18
568-241V	1	3.47	568-316V	3	1.71	568-366V	1	16.37	568-448V	1	25.24
568-242V	1	3.51	568-317V	3	1.84	568-367V	1	17.59	568-449V	1	27.22
568-243V	1	3.72	568-318V	2	1.87	568-368V	1	18.32	568-450V	1	29.40
568-244V	1	3.88	568-319V	2	1.93	568-369V	1	18.82	568-451V	1	29.94
568-245V	1	3.94	568-320V	2	1.98	568-370V	1	19.09	568-452V	1	31.22
568-246V	1	4.12	568-321V	2	2.00	568-371V	1	20.13	568-453V	1	32.32
568-247V	1	4.18	568-322V	2	2.00	568-372V	1	19.55	568-454V	1	33.56
568-248V	1	4.27	568-323V	2	2.23	568-373V	1	20.86	568-455V	1	34.73
568-249V	1	4.38	568-324V	2	2.35	568-374V	1	21.05	568-456V	1	34.84
568-250V	1	4.64	568-325V	2	2.52	568-375V	1	22.43	568-457V	1	37.05
568-251V	1	4.85	568-326V	1	2.67	568-376V	1	23.63	568-458V	1	37.49
568-252V	1	5.16	568-327V	1	2.75	568-377V	1	24.62	568-459V	1	38.89
568-253V	1	5.25	568-328V	1	2.93	568-378V	1	25.78	568-460V	1	39.51
568-254V	1	5.43	568-329V	1	3.35	568-379V	1	27.62	568-461V	1	47.13
568-255V	1	5.67	568-330V	1	3.64	568-380V	1	29.23	568-462V	1	50.19
568-256V	1	5.86	568-331V	1	3.72	568-381V	1	30.73	568-463V	1	53.18
568-257V	1	6.04	568-332V	1	4.20	568-382V	1	31.68	568-464V	1	54.86
568-258V	1	6.22	568-333V	1	4.38	568-383V	1	33.33	568-465V	1	56.69
568-259V	1	6.33	568-334V	1	4.59	568-384V	1	35.00	568-466V	1	57.47
568-260V	1	6.44	568-335V	1	4.85	568-385V	1	36.73	568-467V	1	56.63
568-261V	1	6.64	568-336V	1	5.20	568-386V	1	38.89	568-468V	1	61.18
568-262V	1	7.03	568-337V	1	5.49	568-388V	1	45.63	568-469V	1	61.36
568-263V	1	7.74	568-338V	1	5.78	568-389V	1	46.61	568-470V	1	66.84
568-264V	1	8.76	568-339V	1	6.18	568-390V	1	47.62	568-471V	1	59.02
568-265V	1	9.36	568-340V	1	6.48	568-391V	1	49.65	568-472V	1	71.81
568-266V	1	9.75	568-341V	1	6.64	568-392V	1	51.06	568-473V	1	75.02
568-267V	1	10.23	568-342V	1	6.87	568-394V	1	60.04	568-474V	1	84.36
568-268V	1	10.61	568-343V	1	7.00	568-425V	1	11.23	568-475V	1	87.59
568-269V	1	10.99	568-344V	1	7.24	568-426V	1	11.29			
568-270V	1	11.41	568-345V	1	7.40	568-427V	1	10.92			
568-271V	1	11.82	568-346V	1	7.74	568-428V	1	12.41			
568-272V	1	12.21	568-347V	1	7.77	568-429V	1	12.68			
568-273V	1	12.34	568-348V	1	7.97	568-430V	1	12.76			
568-274V	1	13.06	568-349V	1	8.20	568-431V	1	13.06			
568-275V	1	13.56	568-350V	1	8.41	568-432V	1	13.23			
568-276V	1	13.74	568-351V	1	8.78	568-433V	1	13.81			

# STYLE 568, 75 DURO FLUOROCARBON O-RINGS



## SEAL INFORMATION

MATERIAL	BLACK FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (Black)

Part Number	Min. Pkg. Qty.	List Price
568-007V-BLACK	40	\$ 0.20
568-008V-BLACK	40	0.19
568-010V-BLACK	30	0.19
568-011V-BLACK	30	0.19
568-012V-BLACK	20	0.20
568-014V-BLACK	20	0.22
568-015V-BLACK	20	0.25
568-016V-BLACK	20	0.25
568-032V-BLACK	10	0.87
568-110V-BLACK	15	0.22
568-111V-BLACK	15	0.23
568-112V-BLACK	15	0.27
568-113V-BLACK	15	0.27
568-114V-BLACK	15	0.32
568-115V-BLACK	15	0.33
568-116V-BLACK	10	0.37
568-119V-BLACK	10	0.51
568-125V-BLACK	5	0.51

Part Number	Min. Pkg. Qty.	List Price
568-129V-BLACK	5	\$ 0.88
568-136V-BLACK	3	1.12
568-145V-BLACK	2	1.46
568-146V-BLACK	2	2.19
568-151V-BLACK	2	2.37
568-161V-BLACK	2	5.06
568-162V-BLACK	2	4.84
568-163V-BLACK	2	5.56
568-206V-BLACK	5	0.82
568-208V-BLACK	5	0.53
568-210V-BLACK	5	0.55
568-211V-BLACK	5	0.96
568-213V-BLACK	5	0.69
568-214V-BLACK	5	0.73
568-218V-BLACK	5	0.94
568-220V-BLACK	3	0.97
568-222V-BLACK	3	1.22
568-228V-BLACK	3	1.78

Part Number	Min. Pkg. Qty.	List Price
568-231V-BLACK	2	\$ 2.41
568-233V-BLACK	2	3.44
568-236V-BLACK	2	2.86
568-237V-BLACK	2	2.98
568-238V-BLACK	2	3.11
568-240V-BLACK	1	3.29
568-241V-BLACK	1	3.47
568-245V-BLACK	1	6.06
568-248V-BLACK	1	5.62
568-271V-BLACK	1	11.82
568-331V-BLACK	1	5.64
568-334V-BLACK	1	6.22
568-336V-BLACK	1	6.87
568-360V-BLACK	1	12.80
568-364V-BLACK	1	16.21
568-445V-BLACK	1	22.02

## STYLE 568, 75 DURO FLUOROCARBON O-RING CORD

**NOTE:** Cord is Black fluorocarbon.  
See O-Ring Kit section for splicing Information.

Part Number	Nominal C/S	List Price Per Foot
568C-062V	1/16" ROUND	\$ 2.89
568C-093V	3/32" ROUND	3.42
568C-125V	1/8" ROUND	5.26
568C-187V	3/16" ROUND	8.77
568C-250V	1/4" ROUND	14.89

SEAL INFORMATION	
MATERIAL	BLACK FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) (Cord) - (Nom. Size) (Fluorocarbon)

## STYLE 568, 90 DURO FLUOROCARBON O-RINGS



SEAL INFORMATION	
MATERIAL	FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (90 Duro Fluorocarbon)

Part Number	Min. Pkg. Qty.	Price	Part Number	Min. Pkg. Qty.	Price	Part Number	Min. Pkg. Qty.	Price
568-011-90DV	15	\$ 0.65	568-121-90DV	1	\$ 7.31	568-240-90DV	1	\$ 8.26
568-012-90DV	15	0.69	568-131-90DV	1	1.71	568-246-90DV	1	7.27
568-014-90DV	10	0.78	568-214-90DV	3	2.17	568-254-90DV	1	8.99
568-015-90DV	15	0.71	568-215-90DV-BLACK	1	1.30	568-260-90DV	1	11.05
568-016-90DV	15	0.71	568-218-90DV	2	3.06	568-264-90DV	1	12.43
568-018-90DV	15	0.71	568-223-90DV	2	3.22	568-272-90DV	1	24.78
568-019-90DV	15	0.71	568-224-90DV	2	4.38	568-277-90DV	1	27.08
568-020-90DV	15	0.73	568-226-90DV	2	5.45	568-363-90DV	1	24.07
568-021-90DV	15	0.78	568-227-90DV	2	5.45	568-364-90DV	1	24.21
568-022-90DV	15	0.78	568-233-90DV	3	5.26			
568-113-90DV	15	0.84	568-239-90DV	2	5.55			

# STYLE 568, 90 DURO FLUOROCARBON BOSS O-RINGS



## SEAL INFORMATION

MATERIAL	FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (90 Duro Fluorocarbon)

Part Number	Min. Pkg. Qty.	List Price
568-901V	10	\$ 0.64
568-902V	10	0.72
568-903V	10	0.73
568-904V	10	0.77
568-905V	10	0.78

Part Number	Min. Pkg. Qty.	List Price
568-906V	10	\$ 0.82
568-907V	10	0.87
568-908V	10	0.96
568-909V	10	1.22
568-910V	10	1.31

Part Number	Min. Pkg. Qty.	List Price
568-911V	5	\$ 1.53
568-912V	5	1.74
568-913V	5	1.64
568-914V	3	2.19
568-916V	3	2.34

Part Number	Min. Pkg. Qty.	List Price
568-918V	3	\$ 2.44
568-920V	3	2.86
568-924V	2	4.02
568-928V	2	4.91
568-932V	2	5.41

## STYLE 568, 70A DURO ETHYLENE PROPYLENE O-RINGS

**NOTE:** This compound is NOT D.O.T. certified for brake system use.



### SEAL INFORMATION

MATERIAL	ETHYLENE PROPYLENE
TEMPERATURE RANGE	-65° TO +300° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (Ethylene Propylene)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-008EP	14	\$ 0.51	568-015EP	10	\$ 0.88	568-113EP	8	\$ 0.77	568-215EP	6	\$ 1.14
568-010EP	12	0.56	568-018EP	6	1.00	568-114EP	8	0.83	568-218EP	5	1.24
568-011EP	12	0.61	568-043EP	2	3.92	568-115EP	8	0.84	568-220EP	5	1.31
568-012EP	12	0.65	568-110EP	10	0.68	568-116EP	8	0.88	568-222EP	5	1.37
568-013EP	8	0.87	568-111EP	10	0.71	568-212EP	5	1.00	568-238EP	1	2.28
568-014EP	6	0.88	568-112EP	8	0.74	568-214EP	6	1.12	568-248EP	3	2.77

## STYLE 568, 90A DURO ETHYLENE PROPYLENE O-RINGS

Part Number	Min. Pkg. Qty.	List Price
568-126-90DEP	5	\$ 0.59
568-144-90DEP	3	0.89
568-264-90DEP	1	2.37
568-280-90DEP	1	5.12
568-281-90DEP	1	5.27

### SEAL INFORMATION

MATERIAL	ETHYLENE PROPYLENE
TEMPERATURE RANGE	-65° TO +300° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (90 Duro Ethylene Propylene)

# STYLE 568, 70A DURO SILICONE O-RINGS



## SEAL INFORMATION

MATERIAL	SILICONE
TEMPERATURE RANGE	-70° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (Silicone)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-008S	50	\$ 0.47	568-110S	12	\$ 0.51	568-215S	6	\$ 1.14	568-238S	3	\$ 2.92
568-010S	20	0.53	568-111S	12	0.53	568-216S	6	1.14	568-239S	2	3.39
568-011S	20	0.55	568-112S	12	0.71	568-218S	6	1.24	568-240S	2	3.46
568-012S	20	0.55	568-113S	14	0.47	568-219S	6	1.27	568-248S	2	5.28
568-013S	20	0.55	568-115S	13	0.53	568-220S	5	1.31	568-265S	1	4.38
568-014S	12	0.54	568-116S	12	0.55	568-222S	8	1.61	568-320S	5	1.36
568-015S	20	0.56	568-117S	11	0.58	568-223S	5	1.66	568-325S	4	1.76
568-016S	12	0.58	568-118S	10	0.65	568-224S	5	1.76	568-326S	4	1.89
568-018S	12	0.58	568-120S	8	0.68	568-226S	4	1.86	568-328S	3	2.22
568-025S	11	0.58	568-210S	10	0.72	568-227S	4	1.93	568-329S	3	2.29
568-028S	11	1.17	568-212S	8	0.88	568-228S	4	1.99	568-334S	3	2.58
568-042S	10	0.74	568-213S	7	0.95	568-231S	3	2.41	568-367S	1	8.04
568-108S	12	0.47	568-214S	7	1.02	568-232S	3	2.49	568-445S	1	27.20

# STYLE 568, 55 - 58 SHORE D PTFE O-RING



## SEAL INFORMATION

MATERIAL	55 - 58 SHORE D PTFE
TEMPERATURE RANGE	-65° TO +500° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (PTFE)

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-006T	7	\$ 0.94	568-028T	2	\$ 3.21	568-133T	2	\$ 3.37	568-229T	1	\$ 6.14
568-009T	6	1.14	568-029T	2	3.48	568-137T	2	4.53	568-231T	1	6.27
568-010T	1	1.14	568-030T	2	3.48	568-142T	2	5.55	568-232T	1	6.58
568-011T	5	1.14	568-032T	2	3.65	568-210T	3	1.94	568-234T	1	6.85
568-012T	5	1.55	568-109T	5	1.47	568-212T	2	3.72	568-235T	1	7.07
568-013T	6	1.22	568-110T	5	1.47	568-213T	3	2.41	568-236T	1	7.15
568-014T	5	1.30	568-111T	5	1.47	568-214T	3	2.41	568-240T	1	7.82
568-015T	5	1.38	568-112T	4	1.61	568-215T	3	2.49	568-242T	1	8.54
568-016T	4	1.84	568-114T	4	1.63	568-218T	1	3.76	568-248T	1	14.61
568-018T	4	1.76	568-115T	4	1.63	568-219T	2	3.76	568-258T	1	32.14
568-020T	4	1.87	568-116T	4	1.84	568-220T	2	4.17	568-268T	1	45.46
568-021T	3	2.19	568-117T	4	2.15	568-223T	2	5.26	568-273T	1	51.71
568-022T	3	2.19	568-121T	4	3.41	568-224T	2	5.26	568-326T	1	7.31
568-023T	3	2.22	568-122T	4	3.41	568-225T	2	5.55	568-327T	1	7.31
568-024T	3	2.22	568-126T	3	2.77	568-226T	2	5.55	568-330T	1	8.26
568-026T	3	2.85	568-132T	2	3.29	568-228T	1	6.14	568-342T	1	12.96

# STYLE 568, 90 DURO URETHANE O-RINGS



## SEAL INFORMATION

MATERIAL	90A URETHANE
TEMPERATURE RANGE	-65° TO +220° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (Urethane)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
568-006U	4	\$ 2.11	568-119U	2	\$ 6.31	568-227U	2	\$ 9.57
568-008U	3	2.63	568-120U	2	6.73	568-228U	2	9.57
568-009U	3	2.66	568-121U	2	6.73	568-230U	2	9.82
568-010U	3	2.65	568-121U-70D	2	4.28	568-232U	2	10.35
568-011U	3	2.73	568-122U	2	6.73	568-233U	1	10.35
568-012U	3	2.77	568-123U	2	7.36	568-234U	1	10.35
568-013U	3	2.79	568-124U	2	7.36	568-235U	1	12.64
568-014U	3	2.79	568-131U	2	9.73	568-236U	1	12.94
568-014U-70D	3	2.79	568-133U	2	9.73	568-238U	1	16.06
568-015U	1	2.81	568-134U	1	9.73	568-240U	1	16.06
568-016U	3	2.81	568-136U-70D	2	6.33	568-242U	1	19.20
568-016U-70D	3	3.87	568-148U	1	10.46	568-244U	1	29.13
568-017U	3	2.89	568-206U	3	3.48	568-248U	1	31.21
568-018U	3	2.95	568-210U	3	4.48	568-256U	1	45.28
568-020U	3	2.98	568-211U	2	4.48	568-260U	1	54.34
568-022U	3	3.94	568-213U	2	4.57	568-326U	1	10.02
568-023U	3	3.94	568-216U	2	4.84	568-327U	1	7.02
568-110U	2	3.46	568-218U	2	4.84	568-328U	1	7.56
568-111U	2	3.46	568-219U	2	5.78	568-329U	1	13.61
568-112U	3	3.46	568-220U	2	8.42	568-330U	1	8.81
568-113U	2	4.82	568-221U	2	6.14	568-331U	1	10.08
568-114U	2	4.33	568-222U	2	6.14	568-332U	1	10.08
568-115U	2	4.33	568-223U	2	8.95	568-335U	1	16.55
568-116U	2	5.27	568-224U	2	8.95	568-336U	1	19.27
568-117U	2	5.57	568-225U	1	9.57	568-337U	1	19.63
568-118U	2	6.31	568-226U	2	9.57	568-348U	1	19.37

# STYLE 580, SQUARE BUNA-N O-RINGS



## SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
580-008	10	\$ 0.68	580-120	27	\$ 0.25	580-154	9	\$ 0.83	580-235	13	\$ 0.58
580-014	38	0.19	580-121	25	0.25	580-155	7	1.04	580-236	12	0.61
580-015	50	0.19	580-122	25	0.51	580-156	6	1.25	580-237	12	0.65
580-016	38	0.19	580-123	12	0.61	580-157	5	1.53	580-238	12	0.65
580-017	30	0.21	580-124	12	0.65	580-158	5	1.65	580-239	10	0.72
580-019	30	0.22	580-125	12	0.65	580-159	4	1.81	580-240	10	0.74
580-021	25	0.24	580-125-90D	5	1.76	580-160	4	1.93	580-241	10	0.74
580-022	29	0.24	580-126	27	0.65	580-161	4	2.16	580-242	10	0.74
580-025	25	0.28	580-127	12	0.65	580-163	3	2.44	580-243	9	0.79
580-026	24	0.28	580-128	12	0.65	580-164	3	2.52	580-244	9	0.79
580-028	25	0.28	580-129	12	0.65	580-170	3	2.89	580-245	8	0.93
580-029	25	0.28	580-130	12	0.65	580-206	15	0.37	580-246	7	1.11
580-032	15	0.51	580-131	12	0.65	580-209	15	0.37	580-247	6	1.39
580-033	15	0.51	580-132	11	0.69	580-210	15	0.37	580-248	5	1.41
580-034	15	0.51	580-133	11	0.69	580-211	15	0.38	580-249	5	1.48
580-035	15	0.58	580-134	11	0.69	580-213	15	0.38	580-250	5	1.58
580-036	13	0.58	580-135	11	0.69	580-214	15	0.38	580-251	5	1.61
580-037	13	0.58	580-136	11	0.69	580-215	15	0.38	580-252	5	1.75
580-038	13	0.58	580-137	11	0.69	580-216	15	0.38	580-253	4	1.78
580-039	12	0.61	580-138	11	0.69	580-217	15	0.47	580-254	4	1.81
580-040	12	0.65	580-139	11	0.69	580-218	15	0.46	580-255	4	1.86
580-041	9	0.79	580-140	11	0.69	580-220	15	0.46	580-256	4	1.97
580-042	9	0.79	580-141	11	0.69	580-221	15	0.49	580-257	4	2.03
580-043	9	0.83	580-142	11	0.69	580-222	15	0.49	580-258	4	2.16
580-044	9	0.83	580-143	11	0.69	580-223	15	0.49	580-259	4	2.33
580-045	8	0.93	580-144	11	0.69	580-224	15	0.49	580-260	3	2.41
580-046	7	1.04	580-145	11	0.69	580-225	15	0.49	580-261	3	2.41
580-047	7	1.11	580-146	11	0.69	580-226	15	0.51	580-262	3	2.44
580-110	23	0.28	580-147	10	0.72	580-227	15	0.51	580-263	3	2.58
580-113	13	0.54	580-148	10	0.72	580-229	15	0.51	580-264	3	2.62
580-115	14	0.54	580-149	10	0.72	580-230	15	0.51	580-265	3	2.70
580-116	35	0.41	580-150	10	0.72	580-231	15	0.51	580-266	3	2.88
580-117	30	0.23	580-151	10	0.74	580-232	15	0.51	580-267	3	3.02
580-118	30	0.22	580-152	10	0.74	580-233	15	0.51	580-268	3	3.02
580-119	13	0.24	580-153	9	0.79	580-234	14	0.54	580-269	3	6.65

## STYLE 580, SQUARE BUNA-N O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
580-271	3	\$14.19	580-337	10	\$ 1.11	580-354	4	\$ 1.98	580-435	3	\$ 2.58
580-273	3	20.74	580-338	10	1.19	580-355	4	1.98	580-436	3	2.67
580-274	3	7.10	580-339	10	1.19	580-356	4	1.98	580-437	3	2.91
580-278	1	23.90	580-340	10	1.19	580-357	4	1.98	580-438	3	3.03
580-322	5	0.71	580-341	9	1.19	580-358	4	1.98	580-439	3	3.21
580-324	8	0.84	580-342	9	1.27	580-366	4	2.37	580-440	3	3.42
580-325	15	0.84	580-343	8	1.27	580-414	2	4.46	580-441	2	3.65
580-326	15	0.84	580-344	7	1.27	580-423	2	4.20	580-442	2	3.73
580-328	15	0.84	580-345	7	1.27	580-425	3	2.38	580-443	2	3.83
580-329	13	0.84	580-346	7	1.39	580-426	3	2.38	580-444	2	3.91
580-330	13	0.96	580-347	7	1.48	580-427	3	2.38	580-445	2	3.91
580-331	13	0.96	580-348	7	1.48	580-428	3	2.38	580-446	2	4.24
580-332	13	0.96	580-349	6	1.48	580-429	3	2.38	580-447	2	4.69
580-333	13	0.96	580-350	6	1.65	580-430	3	2.38	580-448	2	5.56
580-334	13	1.11	580-351	6	1.65	580-431	3	2.38	580-449	2	13.53
580-335	12	1.11	580-352	6	1.65	580-433	3	2.41	580-450	1	24.47
580-336	11	1.11	580-353	5	1.98	580-434	3	2.41	580-451	1	30.38

## STYLE QR, BUNA-N QUAD® RINGS

Quad® Rings provide improved stability and lubricity over conventional o-rings, reducing the tendency to spiral in the groove. They interchange standard o-rings in a variety of static and dynamic sealing applications including rotary, reciprocating or oscillating motion.

**NOTE:** Last three digits of part number corresponds to standard o-ring dash numbers (568-218 = QR-4218)



V = FLUOROCARBON

### SEAL INFORMATION

MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
QR-4004	6	\$ 1.20	QR-4014	6	\$ 1.20	QR-4024	4	\$ 1.86	QR-4034	3	\$ 2.06
QR-4005	6	1.20	QR-4015	6	1.20	QR-4025	3	2.14	QR-4035	3	2.12
QR-4006	6	1.20	QR-4016	5	1.53	QR-4026	3	2.14	QR-4036	3	3.66
QR-4007	6	1.20	QR-4017	5	1.53	QR-4027	3	2.24	QR-4037	2	2.67
QR-4008	6	1.20	QR-4018	5	1.53	QR-4028	3	2.31	QR-4038	2	3.37
QR-4009	6	1.20	QR-4019	5	1.53	QR-4029	3	2.31	QR-4039	2	3.01
QR-4010	6	1.20	QR-4020	5	1.53	QR-4030	3	2.59	QR-4040	2	3.08
QR-4011	6	1.20	QR-4021	5	1.53	QR-4031	3	2.50	QR-4041	2	3.16
QR-4012	6	1.20	QR-4022	4	1.86	QR-4032	2	2.69	QR-4042	2	3.29
QR-4013	6	1.20	QR-4023	4	1.86	QR-4033	3	2.00	QR-4043	2	3.66

# STYLE QR, BUNA-N QUAD® RINGS

O-RINGS

Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price	Part Number	Min. Pkg. Qty.	List Price
QR-4044	2	\$ 12.54	QR-4152	2	\$ 4.05	QR-4244	2	\$ 5.08	QR-4343	2	\$ 5.86
QR-4045	2	3.71	QR-4153	2	4.26	QR-4245	2	5.08	QR-4344	1	6.72
QR-4046	2	3.74	QR-4154	2	4.12	QR-4246	2	5.08	QR-4345	1	7.71
QR-4047	2	4.54	QR-4156	2	4.12	QR-4247	2	5.08	QR-4346	1	8.90
QR-4048	2	4.68	QR-4157	2	4.20	QR-4248	2	5.34	QR-4347	1	8.90
QR-4050	2	6.46	QR-4158	2	4.94	QR-4249	2	5.34	QR-4348	1	8.90
QR-4108	5	1.19	QR-4159	2	5.09	QR-4250	2	5.34	QR-4349	1	8.90
QR-4109	5	1.39	QR-4161	2	5.24	QR-4251	2	5.34	QR-4350	1	8.90
QR-4110	5	1.39	QR-4164	1	3.94	QR-4252	1	7.55	QR-4351	1	10.93
QR-4111	5	1.39	QR-4202	5	1.50	QR-4253	1	18.07	QR-4352	1	10.93
QR-4112	5	1.39	QR-4204	5	1.53	QR-4254	1	8.24	QR-4353	1	10.93
QR-4113	5	1.39	QR-4205	5	1.53	QR-4255	1	8.89	QR-4354	1	14.38
QR-4113V	1	4.76	QR-4206	5	1.53	QR-4256	1	8.89	QR-4355	1	14.38
QR-4114	5	1.39	QR-4207	5	1.53	QR-4257	1	10.18	QR-4356	1	14.38
QR-4115	5	1.39	QR-4208	5	1.53	QR-4258	1	10.18	QR-4357	1	15.63
QR-4116	5	1.53	QR-4209	5	1.53	QR-4259	1	10.55	QR-4358	1	15.63
QR-4117	5	1.53	QR-4210	5	1.53	QR-4260	1	9.77	QR-4361	1	15.99
QR-4118	5	1.66	QR-4211	5	1.53	QR-4261	1	12.33	QR-4362	1	16.30
QR-4119	5	1.66	QR-4212	5	1.53	QR-4263	1	12.33	QR-4363	1	16.30
QR-4120	5	1.66	QR-4213	5	1.54	QR-4265	1	12.33	QR-4366	1	24.23
QR-4121	5	1.66	QR-4214	5	1.66	QR-4266	1	13.38	QR-4367	1	24.23
QR-4122	5	1.66	QR-4215	5	1.66	QR-4268	1	20.44	QR-4368	1	24.68
QR-4123	5	1.66	QR-4216	4	1.82	QR-4278	1	35.67	QR-4369	1	25.38
QR-4124	5	1.66	QR-4217	4	1.82	QR-4314	3	2.16	QR-4372	1	35.94
QR-4125	4	1.74	QR-4218	4	1.82	QR-4316	3	2.19	QR-4374	1	32.36
QR-4126	4	1.74	QR-4219	4	1.82	QR-4318	3	2.19	QR-4375	1	32.36
QR-4127	4	1.74	QR-4220	4	2.04	QR-4319	3	4.47	QR-4425	1	8.75
QR-4128	4	1.74	QR-4221	4	2.04	QR-4320	3	2.41	QR-4426	1	8.75
QR-4129	4	1.74	QR-4222	4	2.04	QR-4321	3	2.41	QR-4427	1	8.75
QR-4130	4	1.74	QR-4223	3	2.43	QR-4322	3	2.48	QR-4428	1	8.75
QR-4131	4	2.04	QR-4224	3	2.43	QR-4323	3	2.48	QR-4429	1	9.71
QR-4132	4	2.04	QR-4225	3	2.43	QR-4324	3	2.48	QR-4430	1	9.71
QR-4133	4	2.04	QR-4226	3	2.43	QR-4325	3	2.66	QR-4431	1	9.71
QR-4134	4	2.04	QR-4227	3	2.43	QR-4326	3	2.66	QR-4432	1	10.73
QR-4135	3	2.77	QR-4228	3	2.75	QR-4327	3	2.66	QR-4433	1	10.73
QR-4136	3	2.85	QR-4229	3	2.75	QR-4328	3	2.98	QR-4434	1	10.92
QR-4137	3	2.94	QR-4230	3	2.84	QR-4329	3	2.98	QR-4435	1	10.92
QR-4138	3	3.19	QR-4231	3	2.84	QR-4330	3	2.98	QR-4436	1	10.92
QR-4139	3	3.19	QR-4232	3	2.84	QR-4331	3	3.08	QR-4437	1	11.37
QR-4140	3	3.36	QR-4233	3	2.84	QR-4332	3	3.08	QR-4438	1	11.37
QR-4141	3	3.48	QR-4234	3	2.84	QR-4333	3	3.39	QR-4439	1	11.37
QR-4142	3	3.63	QR-4235	3	2.84	QR-4334	3	3.39	QR-4440	1	12.35
QR-4143	2	2.98	QR-4236	3	2.84	QR-4335	2	3.69	QR-4441	1	12.35
QR-4144	2	3.78	QR-4237	3	2.84	QR-4336	2	3.69	QR-4442	1	12.35
QR-4145	2	3.83	QR-4238	2	4.95	QR-4337	2	3.86	QR-4443	1	13.36
QR-4146	2	3.83	QR-4239	2	4.95	QR-4338	2	3.86	QR-4444	1	15.74
QR-4147	2	3.88	QR-4240	2	4.95	QR-4339	2	3.86	QR-4445	1	18.24
QR-4148	2	3.89	QR-4241	2	4.95	QR-4340	2	5.24	QR-4446	1	19.90
QR-4149	2	3.92	QR-4242	2	4.95	QR-4341	2	5.56	QR-4447	1	19.90
QR-4151	2	4.01	QR-4243	2	5.08	QR-4342	2	5.86	QR-4448	1	32.31

# STYLE QR, BUNA-N QUAD<sup>®</sup> RINGS



Part Number	Min. Pkg. Qty.	List Price
QR-4450	1	\$ 36.19
QR-4452	1	37.03
QR-4453	1	38.26

Part Number	Min. Pkg. Qty.	List Price
QR-4454	1	\$ 50.97
QR-4455	1	38.26

Part Number	Min. Pkg. Qty.	List Price
QR-4458	1	\$ 38.83
QR-4464	1	76.51

Part Number	Min. Pkg. Qty.	List Price
QR-4468	1	\$ 87.30
QR-4470	1	108.18


## STYLE SFS SPLIT FLANGE SEALS

### FOR 4-BOLT SPLIT FLANGE CONNECTORS

Flange seals are a one piece dual durometer urethane static seal. The black outer part is a tough, extrusion-resistant 95 Durometer urethane, and the yellow inner layer is 57 Durometer with low compression set and excellent sealing properties. These seals are a direct replacement for o-rings and do not require modification to any split flange groove.

### SEAL INFORMATION

MATERIAL	URETHANE
TEMPERATURE RANGE	-40° TO +200° F
PRESSURE RANGE	0 TO 6,000 PSI
PART NUMBER	(Prefix) - (Dash No.)

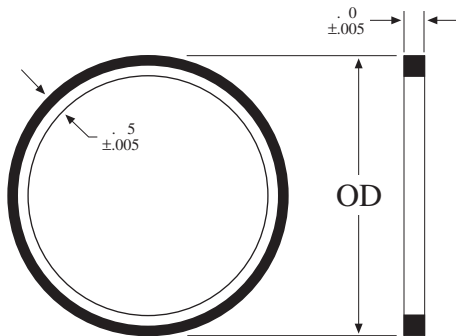

Part Number	Flange Size	Replaces O-Ring No.	Outside Diam.	List Price
SFS-8	1/2	-210	1.005	\$ 2.45
SFS-12	3/4	-214	1.255	2.57
SFS-16	1	-219	1.565	2.92
SFS-20	1-1/4	-222	1.755	3.16
SFS-24	1-1/2	-225	2.125	3.37
SFS-32	2	-228	2.500	4.13
SFS-40	2-1/2	-232	3.005	5.07
SFS-48	3	-237	3.625	6.48