

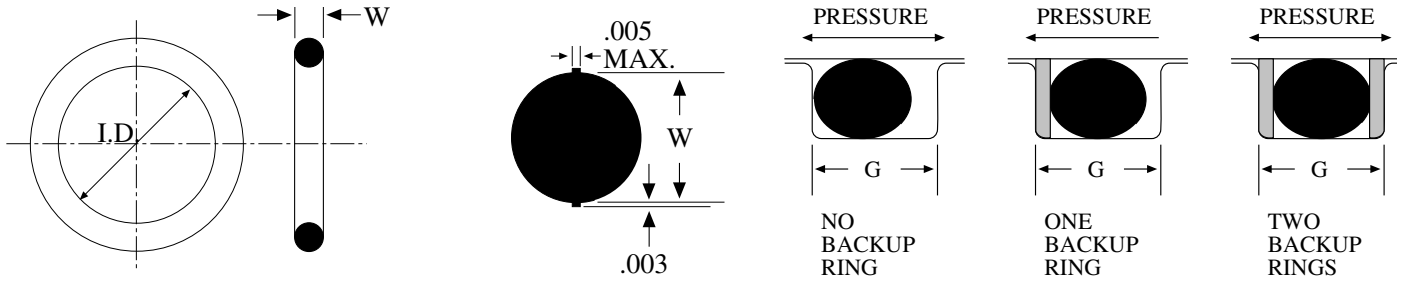


O-RING GLAND DIMENSIONS





O-Ring Gland Design For Static Seals

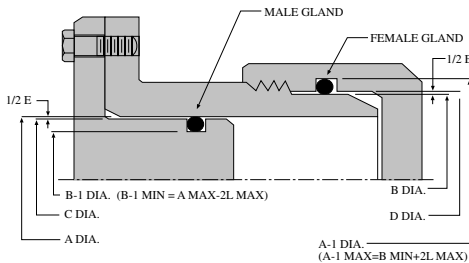

- A - Bore Dia. (male gland)
- A-1 - Groove Dia. (female gland)
- B - Tube OD (female gland)
- B-1 - Groove Dia. (male gland)
- C - Plug Dia. (male gland)
- D - Throat Dia. (female gland)
- E - Diametrical Clearance

W O-RING CROSS SECTION	L GROOVE DEPTH		SQUEEZE				E DIAMETRICAL CLEARANCE MAX.	G GROOVE WIDTH ± .005			R GROOVE RADIUS	ECCEN- TRICITY MAX.
			RADIAL		AXIAL			NO BACKUP RING	ONE BACKUP RING	TWO BACKUP RINGS		
			INCHES	%	INCHES	%						
.070	.050-.052	.050-.054	.015-.023	22-23	.013-.023	19-32	.004	.095	.140	.207	.005-.015	.002
.103	.081-.083	.074-.080	.017-.025	17-24	.020-.032	20-30	.005	.142	.173	.240	.005-.015	.002
.139	.111-.113	.101-.107	.022-.032	16-23	.028-.042	20-30	.006	.189	.210	.277	.010-.025	.003
.210	.170-.173	.152-.162	.032-.045	15-21	.043-.063	21-30	.006	.283	.313	.413	.020-.035	.004
.275	.226-.229	.201-.211	.040-.055	15-20	.058-.080	21-29	.007	.377	.410	.540	.020-.035	.00

O-Ring Gland Design For Reciprocating Seals

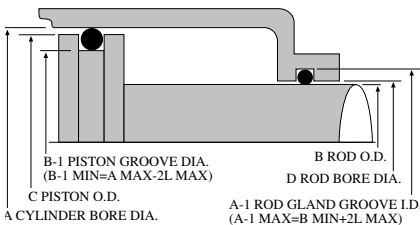

- A - Bore Dia. of Cylinder
- B - OD of Rod
- C - OD of Piston
- D - Bore Dia. for Rod

W O-RING CROSS SECTION	L GROOVE DEPTH	SQUEEZE		E DIAMETRICAL CLEARANCE MAX.	G GROOVE WIDTH ± .005			R GROOVE RADIUS	ECCEN- TRICITY MAX.
		INCHES	%		NO BACKUP RING	ONE BACKUP RING	TWO BACKUP RINGS		
.070	.055-.057	.010-.018	15-25	.004	.095	.140	.207	.005-.015	.002
.103	.088-.090	.010-.018	10-17	.005	.142	.173	.240	.005-.015	.002
.139	.121-.123	.012-.022	9-16	.006	.189	.210	.277	.010-.025	.003
.210	.185-.188	.017-.030	8-14	.006	.283	.313	.413	.020-.035	.004
.275	.237-.240	.029-.044	11-16	.007	.377	.410	.540	.020-.035	.005



O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-001	1/32	3/32	1/32	.029±.004	.040±.003
-001 1/2	1/16	1/8	1/32	.070±.004	.040±.003
-002	3/64	9/64	3/64	.042±.004	.050±.003
-003	1/16	3/16	1/16	.056±.004	.060±.003
-004	5/64	13/64	1/16	.070±.005	.070±.003
-005	3/32	7/32	1/16	.101±.005	.070±.003
-006	1/8	1/4	1/16	.114±.005	.070±.003
-007	5/32	9/32	1/16	.145±.005	.070±.003
-008	3/16	5/16	1/16	.176±.005	.070±.003
-009	7/32	11/32	1/16	.208±.005	.070±.003
-010	1/4	3/8	1/16	.239±.005	.070±.003
-011	5/16	7/16	1/16	.301±.005	.070±.003
-012	3/8	1/2	1/16	.364±.005	.070±.003
-013	7/16	9/16	1/16	.426±.005	.070±.003
-014	1/2	5/8	1/16	.489±.005	.070±.003
-015	9/16	11/16	1/16	.551±.007	.070±.003
-016	5/8	3/4	1/16	.614±.009	.070±.003
-017	11/16	13/16	1/16	.676±.009	.070±.003
-018	3/4	7/8	1/16	.739±.009	.070±.003
-019	13/16	15/16	1/16	.801±.009	.070±.003
-020	7/8	1	1/16	.864±.009	.070±.003
-021	15/16	1 1/16	1/16	.926±.009	.070±.003
-022	1	1 1/8	1/16	.989±.010	.070±.003
-023	1 1/16	1 3/16	1/16	1.051±.010	.070±.003
-024	1 1/8	1 1/4	1/16	1.114±.010	.070±.003
-025	1 3/16	1 5/16	1/16	1.176±.011	.070±.003
-026	1 1/4	1 3/8	1/16	1.239±.011	.070±.003
-027	1 5/16	1 7/16	1/16	1.301±.011	.070±.003
-028	1 3/8	1 1/2	1/16	1.364±.013	.070±.003
-029	1 1/2	1 5/8	1/16	1.489±.013	.070±.003
-030	1 5/8	1 3/4	1/16	1.614±.013	.070±.003
-031	1 3/4	1 7/8	1/16	1.739±.015	.070±.003
-032	1 7/8	2	1/16	1.864±.015	.070±.003
-033	2	2 1/8	1/16	1.989±.018	.070±.003
-034	2 1/8	2 1/4	1/16	2.114±.018	.070±.003
-035	2 1/4	2 3/8	1/16	2.239±.018	.070±.003
-036	2 3/8	2 1/2	1/16	2.364±.018	.070±.003
-037	2 1/2	2 5/8	1/16	2.489±.018	.070±.003
-038	2 5/8	2 3/4	1/16	2.614±.020	.070±.003
-039	2 3/4	2 7/8	1/16	2.739±.020	.070±.003
-040	2 7/8	3	1/16	2.864±.020	.070±.003
-041	3	3 1/8	1/16	2.989±.024	.070±.003
-042	3 1/4	3 3/8	1/16	3.239±.024	.070±.003
-043	3 1/2	3 5/8	1/16	3.489±.024	.070±.003
-044	3 3/4	3 7/8	1/16	3.739±.027	.070±.003
-045	4	4 1/8	1/16	3.989±.027	.070±.003
-046	4 1/4	4 3/8	1/16	4.239±.030	.070±.003

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-047	4 1/2	4 5/8	1/16	4.489±.030	.070±.003
-048	4 3/4	4 7/8	1/16	4.739±.030	.070±.003
-049	5	5 1/8	1/16	4.989±.037	.070±.003
-050	5 1/4	5 3/8	1/16	5.239±.037	.070±.003
-102	1/16	1/4	3/32	.049±.005	.103±.003
-103	3/32	9/32	3/32	.081±.005	.103±.003
-104	1/8	5/16	3/32	.112±.005	.103±.003
-105	5/32	11/32	3/32	.143±.005	.103±.003
-106	3/16	3/8	3/32	.174±.005	.103±.003
-107	7/32	13/32	3/32	.206±.005	.103±.003
-108	1/4	7/16	3/32	.237±.005	.103±.003
-109	5/16	1/2	3/32	.299±.005	.103±.003
-110	3/8	9/16	3/32	.362±.005	.103±.003
-111	7/16	5/8	3/32	.424±.005	.103±.003
-112	1/2	11/16	3/32	.487±.005	.103±.003
-113	9/16	3/4	3/32	.549±.005	.103±.003
-114	5/8	13/16	3/32	.612±.009	.103±.003
-115	11/16	7/8	3/32	.674±.009	.103±.003
-116	3/4	15/16	3/32	.737±.009	.103±.003
-117	13/16	1	3/32	.799±.010	.103±.003
-118	7/8	1 1/16	3/32	.862±.010	.103±.003
-119	15/16	1 1/8	3/32	.924±.010	.103±.003
-120	1	1 3/16	3/32	.987±.010	.103±.003
-121	1 1/16	1 1/4	3/32	1.049±.010	.103±.003
-122	1 1/8	1 5/16	3/32	1.112±.010	.103±.003
-123	1 3/16	1 3/8	3/32	1.174±.012	.103±.003
-124	1 1/4	1 7/16	3/32	1.237±.012	.103±.003
-125	1 5/16	1 1/2	3/32	1.299±.012	.103±.003
-126	1 3/8	1 9/16	3/32	1.362±.012	.103±.003
-127	1 7/16	1 5/8	3/32	1.424±.012	.103±.003
-128	1 1/2	1 11/16	3/32	1.487±.012	.103±.003
-129	1 9/16	1 3/4	3/32	1.549±.015	.103±.003
-130	1 5/8	1 13/16	3/32	1.612±.015	.103±.003
-131	1 11/16	1 7/8	3/32	1.674±.015	.103±.003
-132	1 3/4	1 15/16	3/32	1.737±.015	.103±.003
-133	1 13/16	2	3/32	1.799±.015	.103±.003
-134	1 7/8	2 1/16	3/32	1.862±.015	.103±.003
-135	1 15/16	2 1/8	3/32	1.925±.017	.103±.003
-136	2	2 3/16	3/32	1.987±.017	.103±.003
-137	2 1/16	2 1/4	3/32	2.050±.017	.103±.003
-138	2 1/8	2 5/16	3/32	2.112±.017	.103±.003
-139	2 3/16	2 3/8	3/32	2.175±.017	.103±.003
-140	2 1/4	2 7/16	3/32	2.237±.017	.103±.003
-141	2 5/16	2 1/2	3/32	2.300±.020	.103±.003
-142	2 3/8	2 9/16	3/32	2.362±.020	.103±.003
-143	2 7/16	2 5/8	3/32	2.425±.020	.103±.003
-144	2 1/2	2 11/16	3/32	2.487±.020	.103±.003



O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-145	2 9/16	2 3/4	3/32	2.550±.020	.103±.003
-146	2 5/8	2 13/16	3/32	2.612±.020	.103±.003
-147	2 11/16	2 7/8	3/32	2.675±.022	.103±.003
-148	2 3/4	2 15/16	3/32	2.737±.022	.103±.003
-149	2 13/16	3	3/32	2.800±.022	.103±.003
-150	2 7/8	3 1/16	3/32	2.862±.022	.103±.003
-151	3	3 3/16	3/32	2.987±.024	.103±.003
-152	3 1/4	3 7/16	3/32	3.237±.024	.103±.003
-153	3 1/2	3 11/16	3/32	3.487±.024	.103±.003
-154	3 3/4	3 15/16	3/32	3.737±.028	.103±.003
-155	4	4 3/16	3/32	3.987±.028	.103±.003
-156	4 1/4	4 7/16	3/32	4.237±.030	.103±.003
-157	4 1/2	4 11/16	3/32	4.487±.030	.103±.003
-158	4 3/4	4 15/16	3/32	4.737±.030	.103±.003
-159	5	5 3/16	3/32	4.987±.035	.103±.003
-160	5 1/4	5 7/16	3/32	5.237±.035	.103±.003
-161	5 1/2	5 11/16	3/32	5.487±.035	.103±.003
-162	5 3/4	5 15/16	3/32	5.737±.035	.103±.003
-163	6	6 3/16	3/32	5.987±.035	.103±.003
-164	6 1/4	6 7/16	3/32	6.237±.040	.103±.003
-165	6 1/2	6 11/16	3/32	6.487±.040	.103±.003
-166	6 3/4	6 15/16	3/32	6.737±.040	.103±.003
-167	7	7 3/16	3/32	6.987±.040	.103±.003
-168	7 1/4	7 7/16	3/32	7.237±.045	.103±.003
-169	7 1/2	7 11/16	3/32	7.487±.045	.103±.003
-170	7 3/4	7 15/16	3/32	7.737±.045	.103±.003
-171	8	8 3/16	3/32	7.987±.045	.103±.003
-172	8 1/4	8 7/16	3/32	8.237±.050	.103±.003
-173	8 1/2	8 11/16	3/32	8.487±.050	.103±.003
-174	8 3/4	8 15/16	3/32	8.737±.050	.103±.003
-175	9	9 3/16	3/32	8.987±.050	.103±.003
-176	9 1/4	9 7/16	3/32	9.237±.055	.103±.003
-177	9 1/2	9 11/16	3/32	9.487±.055	.103±.003
-178	9 3/4	9 15/16	3/32	9.737±.055	.103±.003
-201	3/16	7/16	1/8	.171±.005	.139±.004
-202	1/4	1/2	1/8	.234±.005	.139±.004
-203	5/16	9/16	1/8	.296±.005	.139±.004
-204	3/8	5/8	1/8	.359±.005	.139±.004
-205	7/16	11/16	1/8	.421±.005	.139±.004
-206	1/2	3/4	1/8	.484±.005	.139±.004
-207	9/16	13/16	1/8	.546±.007	.139±.004
-208	5/8	7/8	1/8	.609±.009	.139±.004
-209	11/16	15/16	1/8	.671±.009	.139±.004
-210	3/4	1	1/8	.734±.010	.139±.004
-211	13/16	1 1/16	1/8	.796±.010	.139±.004
-212	7/8	1 1/8	1/8	.859±.010	.139±.004
-213	15/16	1 3/16	1/8	.921±.010	.139±.004

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-214	1	1 1/4	1/8	.984±.010	.139±.004
-215	1 1/16	1 5/16	1/8	1.046±.010	.139±.004
-216	1 1/8	1 3/8	1/8	1.109±.012	.139±.004
-217	1 3/16	1 7/16	1/8	1.171±.012	.139±.004
-218	1 1/4	1 1/2	1/8	1.234±.012	.139±.004
-219	1 5/16	1 9/16	1/8	1.296±.012	.139±.004
-220	1 3/8	1 5/8	1/8	1.359±.012	.139±.004
-221	1 7/16	1 11/16	1/8	1.421±.012	.139±.004
-222	1 1/2	1 3/4	1/8	1.484±.015	.139±.004
-223	1 5/8	1 7/8	1/8	1.609±.015	.139±.004
-224	1 3/4	2	1/8	1.734±.015	.139±.004
-225	1 7/8	2 1/8	1/8	1.859±.018	.139±.004
-226	2	2 1/4	1/8	1.984±.018	.139±.004
-227	2 1/8	2 3/8	1/8	2.109±.018	.139±.004
-228	2 1/4	2 1/2	1/8	2.234±.020	.139±.004
-229	2 3/8	2 5/8	1/8	2.359±.020	.139±.004
-230	2 1/2	2 3/4	1/8	2.484±.020	.139±.004
-231	2 5/8	2 7/8	1/8	2.609±.020	.139±.004
-232	2 3/4	3	1/8	2.734±.024	.139±.004
-233	2 7/8	3 1/8	1/8	2.859±.024	.139±.004
-234	3	3 1/4	1/8	2.984±.024	.139±.004
-235	3 1/8	3 3/8	1/8	3.109±.024	.139±.004
-236	3 1/4	3 1/2	1/8	3.234±.024	.139±.004
-237	3 3/8	3 5/8	1/8	3.359±.024	.139±.004
-238	3 1/2	3 3/4	1/8	3.484±.024	.139±.004
-239	3 5/8	3 7/8	1/8	3.609±.028	.139±.004
-240	3 3/4	4	1/8	3.734±.028	.139±.004
-241	3 7/8	4 1/8	1/8	3.859±.028	.139±.004
-242	4	4 1/4	1/8	3.984±.028	.139±.004
-243	4 1/8	4 3/8	1/8	4.109±.028	.139±.004
-244	4 1/4	4 1/2	1/8	4.234±.030	.139±.004
-245	4 3/8	4 5/8	1/8	4.359±.030	.139±.004
-246	4 1/2	4 3/4	1/8	4.484±.030	.139±.004
-247	4 5/8	4 7/8	1/8	4.609±.030	.139±.004
-248	4 3/4	5	1/8	4.734±.030	.139±.004
-249	4 7/8	5 1/8	1/8	4.859±.035	.139±.004
-250	5	5 1/4	1/8	4.984±.035	.139±.004
-251	5 1/8	5 3/8	1/8	5.109±.035	.139±.004
-252	5 1/4	5 1/2	1/8	5.234±.035	.139±.004
-253	5 3/8	5 5/8	1/8	5.359±.035	.139±.004
-254	5 1/2	5 3/4	1/8	5.484±.035	.139±.004
-255	5 5/8	5 7/8	1/8	5.609±.035	.139±.004
-256	5 3/4	6	1/8	5.734±.035	.139±.004
-257	5 7/8	6 1/8	1/8	5.859±.035	.139±.004
-258	6	6 1/4	1/8	5.984±.035	.139±.004
-259	6 1/4	6 1/2	1/8	6.234±.040	.139±.004
-260	6 1/2	6 3/4	1/8	6.484±.040	.139±.004



O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-261	6 3/4	7	1/8	6.734±.040	.139±.004
-262	7	7 1/4	1/8	6.984±.040	.139±.004
-263	7 1/4	7 1/2	1/8	7.234±.045	.139±.004
-264	7 1/2	7 3/4	1/8	7.484±.045	.139±.004
-265	7 3/4	8	1/8	7.734±.045	.139±.004
-266	8	8 1/4	1/8	7.984±.045	.139±.004
-267	8 1/4	8 1/2	1/8	8.234±.050	.139±.004
-268	8 1/2	8 3/4	1/8	8.484±.050	.139±.004
-269	8 3/4	9	1/8	8.734±.050	.139±.004
-270	9	9 1/4	1/8	8.984±.050	.139±.004
-271	9 1/4	9 1/2	1/8	9.234±.055	.139±.004
-272	9 1/2	9 3/4	1/8	9.484±.055	.139±.004
-273	9 3/4	10	1/8	9.734±.055	.139±.004
-274	10	10 1/4	1/8	9.984±.055	.139±.004
-275	10 1/2	10 3/4	1/8	10.484±.055	.139±.004
-276	11	11 1/4	1/8	10.984±.065	.139±.004
-277	11 1/2	11 3/4	1/8	11.484±.065	.139±.004
-278	12	12 1/4	1/8	11.984±.065	.139±.004
-279	13	13 1/4	1/8	12.984±.065	.139±.004
-280	14	14 1/4	1/8	13.984±.065	.139±.004
-281	15	15 1/4	1/8	14.984±.065	.139±.004
-282	16	16 1/4	1/8	15.955±.075	.139±.004
-283	17	17 1/4	1/8	16.955±.080	.139±.004
-284	18	18 1/4	1/8	17.955±.085	.139±.004
-309	7/16	13/16	3/16	.412±.005	.210±.005
-310	1/2	7/8	3/16	.475±.005	.210±.005
-311	9/16	15/16	3/16	.537±.007	.210±.005
-312	5/8	1	3/16	.600±.009	.210±.005
-313	11/16	1 1/16	3/16	.662±.009	.210±.005
-314	3/4	1 1/8	3/16	.725±.010	.210±.005
-315	13/16	1 3/16	3/16	.787±.010	.210±.005
-316	7/8	1 1/4	3/16	.850±.010	.210±.005
-317	15/16	1 5/16	3/16	.912±.010	.210±.005
-318	1	1 3/8	3/16	.975±.010	.210±.005
-319	1 1/16	1 7/16	3/16	1.037±.010	.210±.005
-320	1 1/8	1 1/2	3/16	1.100±.012	.210±.005
-321	1 3/16	1 9/16	3/16	1.162±.012	.210±.005
-322	1 1/4	1 5/8	3/16	1.225±.012	.210±.005
-323	1 5/16	1 11/16	3/16	1.287±.012	.210±.005
-324	1 3/8	1 3/4	3/16	1.350±.012	.210±.005
-325	1 1/2	1 7/8	3/16	1.475±.015	.210±.005
-326	1 5/8	2	3/16	1.600±.015	.210±.005
-327	1 3/4	2 1/8	3/16	1.725±.015	.210±.005
-328	1 7/8	2 1/4	3/16	1.850±.015	.210±.005
-329	2	2 3/8	3/16	1.975±.018	.210±.005
-330	2 1/8	2 1/2	3/16	2.100±.018	.210±.005
-331	2 1/4	2 5/8	3/16	2.225±.018	.210±.005

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-332	2 3/8	2 3/4	3/16	2.350±.018	.210±.005
-333	2 1/2	2 7/8	3/16	2.475±.020	.210±.005
-334	2 5/8	3	3/16	2.600±.020	.210±.005
-335	2 3/4	3 1/8	3/16	2.725±.020	.210±.005
-336	2 7/8	3 1/4	3/16	2.850±.020	.210±.005
-337	3	3 3/8	3/16	2.975±.024	.210±.005
-338	3 1/8	3 1/2	3/16	3.100±.024	.210±.005
-339	3 1/4	3 5/8	3/16	3.225±.024	.210±.005
-340	3 3/8	3 3/4	3/16	3.350±.024	.210±.005
-341	3 1/2	3 7/8	3/16	3.475±.024	.210±.005
-342	3 5/8	4	3/16	3.600±.028	.210±.005
-343	3 3/4	4 1/8	3/16	3.725±.028	.210±.005
-344	3 7/8	4 1/4	3/16	3.850±.028	.210±.005
-345	4	4 3/8	3/16	3.975±.028	.210±.005
-346	4 1/8	4 1/2	3/16	4.100±.028	.210±.005
-347	4 1/4	4 5/8	3/16	4.225±.030	.210±.005
-348	4 3/8	4 3/4	3/16	4.350±.030	.210±.005
-349	4 1/2	4 7/8	3/16	4.475±.030	.210±.005
-350	4 5/8	5	3/16	4.600±.030	.210±.005
-351	4 3/4	5 1/8	3/16	4.725±.030	.210±.005
-352	4 7/8	5 1/4	3/16	4.850±.030	.210±.005
-353	5	5 3/8	3/16	4.975±.037	.210±.005
-354	5 1/8	5 1/2	3/16	5.100±.037	.210±.005
-355	5 1/4	5 5/8	3/16	5.225±.037	.210±.005
-356	5 3/8	5 3/4	3/16	5.350±.037	.210±.005
-357	5 1/2	5 7/8	3/16	5.475±.037	.210±.005
-358	5 5/8	6	3/16	5.600±.037	.210±.005
-359	5 3/4	6 1/8	3/16	5.725±.037	.210±.005
-360	5 7/8	6 1/4	3/16	5.850±.037	.210±.005
-361	6	6 3/8	3/16	5.975±.037	.210±.005
-362	6 1/4	6 5/8	3/16	6.225±.040	.210±.005
-363	6 1/2	6 7/8	3/16	6.475±.040	.210±.005
-364	6 3/4	7 1/8	3/16	6.725±.040	.210±.005
-365	7	7 3/8	3/16	6.975±.040	.210±.005
-366	7 1/4	7 5/8	3/16	7.225±.045	.210±.005
-367	7 1/2	7 7/8	3/16	7.475±.045	.210±.005
-368	7 3/4	8 1/8	3/16	7.725±.045	.210±.005
-369	8	8 3/8	3/16	7.975±.045	.210±.005
-370	8 1/4	8 5/8	3/16	8.225±.050	.210±.005
-371	8 1/2	8 7/8	3/16	8.475±.050	.210±.005
-372	8 3/4	9 1/8	3/16	8.725±.050	.210±.005
-373	9	9 3/8	3/16	8.975±.050	.210±.005
-374	9 1/4	9 5/8	3/16	9.225±.055	.210±.005
-375	9 1/2	9 7/8	3/16	9.475±.055	.210±.005
-376	9 3/4	10 1/8	3/16	9.725±.055	.210±.005
-377	10	10 3/8	3/16	9.975±.055	.210±.005
-378	10 1/2	10 7/8	3/16	10.475±.060	.210±.005




O-RING SIZE CHART AND INSTALLATION DATA

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-379	11	11 3/8	3/16	10.975±.060	.210±.005
-380	11 1/2	11 7/8	3/16	11.475±.065	.210±.005
-381	12	12 3/8	3/16	11.975±.065	.210±.005
-382	13	13 3/8	3/16	12.975±.065	.210±.005
-383	14	14 3/8	3/16	13.975±.070	.210±.005
-384	15	15 3/8	3/16	14.975±.070	.210±.005
-385	16	16 3/8	3/16	15.955±.075	.210±.005
-386	17	17 3/8	3/16	16.955±.080	.210±.005
-387	18	18 3/8	3/16	17.955±.085	.210±.005
-388	19	19 3/8	3/16	18.955±.090	.210±.005
-389	20	20 3/8	3/16	19.955±.095	.210±.005
-390	21	21 3/8	3/16	20.955±.095	.210±.005
-391	22	22 3/8	3/16	21.955±.100	.210±.005
-392	23	23 3/8	3/16	22.940±.105	.210±.005
-393	24	24 3/8	3/16	23.940±.110	.210±.005
-394	25	25 3/8	3/16	24.940±.115	.210±.005
-395	26	26 3/8	3/16	25.940±.120	.210±.005
-400*	1 3/8	1 7/8	1/4	1.225±.012	.275±.006
-401*	1 1/2	2	1/4	1.475±.014	.275±.006
-402*	1 5/8	2 1/8	1/4	1.600±.015	.275±.006
-403*	1 3/4	2 1/4	1/4	1.725±.016	.275±.006
-404*	1 7/8	2 3/8	1/4	1.850±.016	.275±.006
-405*	2	2 1/2	1/4	1.975±.017	.275±.006
-406*	2 1/8	2 5/8	1/4	2.100±.018	.275±.006
-407*	2 1/4	2 3/4	1/4	2.225±.018	.275±.006
-408*	2 3/8	2 7/8	1/4	2.350±.020	.275±.006
-409*	2 1/2	3	1/4	2.475±.020	.275±.006
-410*	2 5/8	3 1/8	1/4	2.600±.020	.275±.006
-411*	2 3/4	3 1/4	1/4	2.725±.022	.275±.006
-412*	2 7/8	3 3/8	1/4	2.850±.022	.275±.006
-413*	3	3 1/2	1/4	2.975±.024	.275±.006
-414*	3 1/8	3 5/8	1/4	3.100±.024	.275±.006
-415*	3 1/4	3 3/4	1/4	3.225±.024	.275±.006
-416*	3 3/8	3 7/8	1/4	3.350±.026	.275±.006
-417*	3 1/2	4	1/4	3.475±.026	.275±.006
-418*	3 5/8	4 1/8	1/4	3.600±.026	.275±.006
-419*	3 3/4	4 1/4	1/4	3.725±.028	.275±.006
-420*	3 7/8	4 3/8	1/4	3.850±.028	.275±.006
-421*	4	4 1/2	1/4	3.975±.028	.275±.006
-422*	4 1/8	4 5/8	1/4	4.100±.030	.275±.006
-423*	4 1/4	4 3/4	1/4	4.225±.030	.275±.006
-424*	4 3/8	4 7/8	1/4	4.350±.030	.275±.006
-425	4 1/2	5	1/4	4.475±.033	.275±.006
-426	4 5/8	5 1/8	1/4	4.600±.033	.275±.006
-427	4 3/4	5 1/4	1/4	4.725±.033	.275±.006
-428	4 7/8	5 3/8	1/4	4.850±.033	.275±.006
-429	5	5 1/2	1/4	4.975±.037	.275±.006

AS-568A SERIES	NOMINAL SIZE			ACTUAL DIMENSIONS	
	ID	OD	Width	ID Tol.	W. Tol.
-430	5 1/8	5 5/8	1/4	5.100±.037	.275±.006
-431	5 1/4	5 3/4	1/4	5.225±.037	.275±.006
-432	5 3/8	5 7/8	1/4	5.350±.037	.275±.006
-433	5 1/2	6	1/4	5.475±.037	.275±.006
-434	5 5/8	6 1/8	1/4	5.600±.037	.275±.006
-435	5 3/4	6 1/4	1/4	5.725±.037	.275±.006
-436	5 7/8	6 3/8	1/4	5.850±.037	.275±.006
-437	6	6 1/2	1/4	5.975±.037	.275±.006
-438	6 1/4	6 3/4	1/4	6.225±.040	.275±.006
-439	6 1/2	7	1/4	6.475±.040	.275±.006
-440	6 3/4	7 1/4	1/4	6.725±.040	.275±.006
-441	7	7 1/2	1/4	6.975±.040	.275±.006
-442	7 1/4	7 3/4	1/4	7.225±.045	.275±.006
-443	7 1/2	8	1/4	7.475±.045	.275±.006
-444	7 3/4	8 1/4	1/4	7.725±.045	.275±.006
-445	8	8 1/2	1/4	7.975±.045	.275±.006
-446	8 1/2	9	1/4	8.475±.055	.275±.006
-447	9	9 1/2	1/4	8.975±.055	.275±.006
-448	9 1/2	10	1/4	9.475±.055	.275±.006
-449	10	10 1/2	1/4	9.975±.055	.275±.006
-450	10 1/2	11	1/4	10.475±.060	.275±.006
-451	11	11 1/2	1/4	10.975±.060	.275±.006
-452	11 1/2	12	1/4	11.475±.060	.275±.006
-453	12	12 1/2	1/4	11.975±.060	.275±.006
-454	12 1/2	13	1/4	12.475±.060	.275±.006
-455	13	13 1/2	1/4	12.975±.060	.275±.006
-456	13 1/2	14	1/4	13.475±.070	.275±.006
-457	14	14 1/2	1/4	13.975±.070	.275±.006
-458	14 1/2	15	1/4	14.475±.070	.275±.006
-459	15	15 1/2	1/4	14.975±.070	.275±.006
-460	15 1/2	16	1/4	15.475±.070	.275±.006
-461	16	16 1/2	1/4	15.955±.075	.275±.006
-462	16 1/2	17	1/4	16.455±.075	.275±.006
-463	17	17 1/2	1/4	16.955±.080	.275±.006
-464	17 1/2	18	1/4	17.455±.085	.275±.006
-465	18	18 1/2	1/4	17.955±.085	.275±.006
-466	18 1/2	19	1/4	18.455±.085	.275±.006
-467	19	19 1/2	1/4	18.955±.090	.275±.006
-468	19 1/2	20	1/4	19.455±.090	.275±.006
-469	20	20 1/2	1/4	19.955±.090	.275±.006
-470	21	21 1/2	1/4	20.955±.090	.275±.006
-471	22	22 1/2	1/4	21.955±.100	.275±.006
-472	23	23 1/2	1/4	22.940±.105	.275±.006
-473	24	24 1/2	1/4	23.940±.110	.275±.006
-474	25	25 1/2	1/4	24.940±.115	.275±.006
-475	26	26 1/2	1/4	25.940±.120	.275±.006

* NON-ANSI STANDARD

STYLE 568, 70 DURO BUNA-N O-RINGS

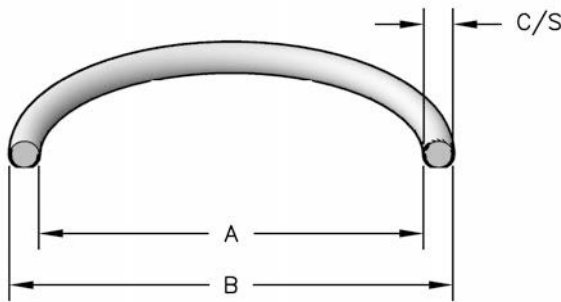

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/32" C/S							
568-001	1/32	3/32	1/32	.029 ±.004	.040 ±.003	50	\$0.06
568-001-1/2	1/16	1/8	1/32	.070 ±.004	.040 ±.003	50	0.22
3/64" C/S							
568-002	3/64	9/64	3/64	.042 ±.004	.050 ±.003	50	\$0.06
1/16" C/S							
568-003	1/16	3/16	1/16	.056 ±.004	.060 ±.003	50	\$0.06
568-004	5/64	13/64	1/16	.070 ±.005	.070 ±.003	50	0.06
568-005	3/32	7/32	1/16	.101 ±.005	.070 ±.003	50	0.06
568-006	1/8	1/4	1/16	.114 ±.005	.070 ±.003	50	0.03
568-007	5/32	9/32	1/16	.145 ±.005	.070 ±.003	50	0.03
568-008	3/16	5/16	1/16	.176 ±.005	.070 ±.003	50	0.03
568-009	7/32	11/32	1/16	.208 ±.005	.070 ±.003	50	0.03
568-010	1/4	3/8	1/16	.239 ±.005	.070 ±.003	50	0.06
568-011	5/16	7/16	1/16	.301 ±.005	.070 ±.003	50	0.06
568-012	3/8	1/2	1/16	.364 ±.005	.070 ±.003	50	0.06
568-013	7/16	9/16	1/16	.426 ±.005	.070 ±.003	50	0.06
568-014	1/2	5/8	1/16	.489 ±.005	.070 ±.003	50	0.06
568-015	9/16	11/16	1/16	.551 ±.007	.070 ±.003	50	0.07
568-016	5/8	3/4	1/16	.614 ±.009	.070 ±.003	50	0.07
568-017	11/16	13/16	1/16	.676 ±.009	.070 ±.003	50	0.09
568-018	3/4	7/8	1/16	.739 ±.009	.070 ±.003	50	0.09
568-019	13/16	15/16	1/16	.801 ±.009	.070 ±.003	50	0.10
568-020	7/8	1	1/16	.864 ±.009	.070 ±.003	50	0.10
568-021	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	50	0.10
568-022	1	1-1/8	1/16	.989 ±.010	.070 ±.003	50	0.10
568-023	1-1/16	1-3/16	1/16	1.051 ±.010	.070 ±.003	50	0.12
568-024	1-1/8	1-1/4	1/16	1.114 ±.010	.070 ±.003	50	0.12
568-025	1-3/16	1-5/16	1/16	1.176 ±.011	.070 ±.003	50	0.17
568-026	1-1/4	1-3/8	1/16	1.239 ±.011	.070 ±.003	50	0.19
568-027	1-5/16	1-7/16	1/16	1.301 ±.011	.070 ±.003	50	0.19
568-028	1-3/8	1-1/2	1/16	1.364 ±.013	.070 ±.003	20	0.19
568-029	1-1/2	1-5/8	1/16	1.489 ±.013	.070 ±.003	20	0.20
568-030	1-5/8	1-3/4	1/16	1.614 ±.013	.070 ±.003	20	0.23
568-031	1-3/4	1-7/8	1/16	1.739 ±.015	.070 ±.003	20	0.26
568-032	1-7/8	2	1/16	1.864 ±.015	.070 ±.003	20	0.29
568-033	2	2-1/8	1/16	1.989 ±.018	.070 ±.003	20	0.36
568-034	2-1/8	2-1/4	1/16	2.114 ±.018	.070 ±.003	20	0.39
568-035	2-1/4	2-3/8	1/16	2.239 ±.018	.070 ±.003	20	0.39

STYLE 568, 70 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-036	2-3/8	2-1/2	1/16	2.364 ±018	.070 ±003	20	0.42
568-037	2-1/2	2-5/8	1/16	2.489 ±018	.070 ±003	20	0.42
568-038	2-5/8	2-3/4	1/16	2.614 ±020	.070 ±003	20	0.47
568-039	2-3/4	2-7/8	1/16	2.739 ±020	.070 ±003	20	0.48
568-040	2-7/8	3	1/16	2.864 ±020	.070 ±003	20	0.50
568-041	3	3-1/8	1/16	2.989 ±024	.070 ±003	20	0.57
568-042	3-1/4	3-3/8	1/16	3.239 ±024	.070 ±003	20	0.62
568-043	3-1/2	3-5/8	1/16	3.489 ±024	.070 ±003	20	0.65
568-044	3-3/4	3-7/8	1/16	3.739 ±027	.070 ±003	10	0.77
568-045	4	4-1/8	1/16	3.989 ±027	.070 ±003	10	0.79
568-046	4-1/4	4-3/8	1/16	4.239 ±030	.070 ±003	10	0.85
568-047	4-1/2	4-5/8	1/16	4.489 ±030	.070 ±003	10	0.94
568-048	4-3/4	4-7/8	1/16	4.739 ±030	.070 ±003	10	1.12
568-049	5	5-1/8	1/16	4.989 ±037	.070 ±003	10	1.44
568-050	5-1/4	5-3/8	1/16	5.239 ±037	.070 ±003	10	1.44
3/32" C/S							
568-102	1/16	1/4	3/32	.049 ±005	.103 ±003	50	\$0.09
568-103	3/32	9/32	3/32	.081 ±005	.103 ±003	50	0.09
568-104	1/8	5/16	3/32	.112 ±005	.103 ±003	50	0.06
568-105	5/32	11/32	3/32	.143 ±005	.103 ±003	50	0.06
568-106	3/16	3/8	3/32	.174 ±005	.103 ±003	50	0.06
568-107	7/32	13/32	3/32	.206 ±005	.103 ±003	50	0.06
568-108	1/4	7/16	3/32	.237 ±005	.103 ±003	50	0.12
568-109	5/16	1/2	3/32	.299 ±005	.103 ±003	50	0.06
568-110	3/8	9/16	3/32	.362 ±005	.103 ±003	50	0.07
568-111	7/16	5/8	3/32	.424 ±005	.103 ±003	50	0.07
568-112	1/2	11/16	3/32	.487 ±005	.103 ±003	50	0.07
568-113	9/16	3/4	3/32	.549 ±005	.103 ±003	50	0.07
568-114	5/8	13/16	3/32	.612 ±009	.103 ±003	50	0.09
568-115	11/16	7/8	3/32	.674 ±009	.103 ±003	50	0.09
568-116	3/4	15/16	3/32	.737 ±009	.103 ±003	50	0.09
568-117	13/16	1	3/32	.799 ±010	.103 ±003	50	0.09
568-118	7/8	1-1/16	3/32	.862 ±010	.103 ±003	50	0.10
568-119	15/16	1-1/8	3/32	.924 ±010	.103 ±003	50	0.10
568-120	1	1-3/16	3/32	.987 ±010	.103 ±003	50	0.10
568-121	1-1/16	1-1/4	3/32	1.049 ±010	.103 ±003	50	0.12
568-122	1-1/8	1-5/16	3/32	1.112 ±010	.103 ±003	50	0.12
568-123	1-3/16	1-3/8	3/32	1.174 ±012	.103 ±003	50	0.12
568-124	1-1/4	1-7/16	3/32	1.237 ±012	.103 ±003	50	0.19
568-125	1-5/16	1-1/2	3/32	1.299 ±012	.103 ±003	50	0.19
568-126	1-3/8	1-9/16	3/32	1.362 ±012	.103 ±003	20	0.20
568-127	1-7/16	1-5/8	3/32	1.424 ±012	.103 ±003	20	0.22
568-128	1-1/2	1-11/16	3/32	1.487 ±012	.103 ±003	20	0.23
568-129	1-9/16	1-3/4	3/32	1.549 ±015	.103 ±003	20	0.23
568-130	1-5/8	1-13/16	3/32	1.612 ±015	.103 ±003	20	0.26
568-131	1-11/16	1-7/8	3/32	1.674 ±015	.103 ±003	20	0.27
568-132	1-3/4	1-15/16	3/32	1.737 ±015	.103 ±003	20	0.27
568-133	1-13/16	2	3/32	1.799 ±015	.103 ±003	20	0.29
568-134	1-7/8	2-1/16	3/32	1.862 ±015	.103 ±003	20	0.29
568-135	1-15/16	2-1/8	3/32	1.925 ±017	.103 ±003	20	0.29

STYLE 568, 70 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-136	2	2-3/16	3/32	1.987 ±017	.103 ±003	20	0.30
568-137	2-1/16	2-1/4	3/32	2.050 ±017	.103 ±003	20	0.30
568-138	2-1/8	2-5/16	3/32	2.112 ±017	.103 ±003	20	0.36
568-139	2-3/16	2-3/8	3/32	2.175 ±017	.103 ±003	20	0.36
568-140	2-1/4	2-7/16	3/32	2.237 ±017	.103 ±003	20	0.36
568-141	2-5/16	2-1/2	3/32	2.300 ±020	.103 ±003	20	0.42
568-142	2-3/8	2-9/16	3/32	2.362 ±020	.103 ±003	20	0.42
568-143	2-7/16	2-5/8	3/32	2.425 ±020	.103 ±003	20	0.42
568-144	2-1/2	2-11/16	3/32	2.487 ±020	.103 ±003	20	0.47
568-145	2-9/16	2-3/4	3/32	2.550 ±020	.103 ±003	20	0.47
568-146	2-5/8	2-13/16	3/32	2.612 ±020	.103 ±003	20	0.47
568-147	2-11/16	2-7/8	3/32	2.675 ±022	.103 ±003	20	0.47
568-148	2-3/4	2-15/16	3/32	2.737 ±022	.103 ±003	20	0.47
568-149	2-13/16	3	3/32	2.800 ±022	.103 ±003	20	0.48
568-150	2-7/8	3-1/16	3/32	2.862 ±022	.103 ±003	20	0.48
568-151	3	3-3/16	3/32	2.987 ±024	.103 ±003	20	0.53
568-152	3-1/4	3-7/16	3/32	3.237 ±024	.103 ±003	20	0.62
568-153	3-1/2	3-11/16	3/32	3.487 ±024	.103 ±003	20	0.65
568-154	3-3/4	3-15/16	3/32	3.737 ±028	.103 ±003	20	0.65
568-155	4	4-3/16	3/32	3.987 ±028	.103 ±003	10	0.85
568-156	4-1/4	4-7/16	3/32	4.237 ±030	.103 ±003	10	1.06
568-157	4-1/2	4-11/16	3/32	4.487 ±030	.103 ±003	10	1.09
568-158	4-3/4	4-15/16	3/32	4.737 ±030	.103 ±003	10	1.12
568-159	5	5-3/16	3/32	4.987 ±035	.103 ±003	10	1.20
568-160	5-1/4	5-7/16	3/32	5.237 ±035	.103 ±003	5	1.29
568-161	5-1/2	5-11/16	3/32	5.487 ±035	.103 ±003	5	1.44
568-162	5-3/4	5-15/16	3/32	5.737 ±035	.103 ±003	5	1.69
568-163	6	6-3/16	3/32	5.987 ±035	.103 ±003	5	1.76
568-164	6-1/4	6-7/16	3/32	6.237 ±040	.103 ±003	5	1.96
568-165	6-1/2	6-11/16	3/32	6.487 ±040	.103 ±003	5	2.02
568-166	6-3/4	6-15/16	3/32	6.737 ±040	.103 ±003	5	2.02
568-167	7	7-3/16	3/32	6.987 ±040	.103 ±003	5	2.02
568-168	7-1/4	7-7/16	3/32	7.237 ±045	.103 ±003	5	2.21
568-169	7-1/2	7-11/16	3/32	7.487 ±045	.103 ±003	5	2.28
568-170	7-3/4	7-15/16	3/32	7.737 ±045	.103 ±003	5	2.36
568-171	8	8-3/16	3/32	7.987 ±045	.103 ±003	1	2.94
568-172	8-1/4	8-7/16	3/32	8.237 ±050	.103 ±003	1	3.05
568-173	8-1/2	8-11/16	3/32	8.487 ±050	.103 ±003	1	3.27
568-174	8-3/4	8-15/16	3/32	8.737 ±050	.103 ±003	1	3.59
568-175	9	9-3/16	3/32	8.987 ±050	.103 ±003	1	3.92
568-176	9-1/4	9-7/16	3/32	9.237 ±055	.103 ±003	1	4.24
568-177	9-1/2	9-11/16	3/32	9.487 ±055	.103 ±003	1	4.38
568-178	9-3/4	9-15/16	3/32	9.737 ±055	.103 ±003	1	4.59
1/8" C/S							
568-201	3/16	7/16	1/8	.171 ±005	.139 ±004	50	\$0.06
568-202	1/4	1/2	1/8	.234 ±005	.139 ±004	50	0.06
568-203	5/16	9/16	1/8	.296 ±005	.139 ±004	50	0.07
568-204	3/8	5/8	1/8	.359 ±005	.139 ±004	50	0.07
568-205	7/16	11/16	1/8	.421 ±005	.139 ±004	50	0.07
568-206	1/2	3/4	1/8	.484 ±005	.139 ±004	50	0.09

STYLE 568, 70 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-207	9/16	13/16	1/8	.546 ±.007	.139 ±.004	50	0.09
568-208	5/8	7/8	1/8	.609 ±.009	.139 ±.004	50	0.10
568-209	11/16	15/16	1/8	.671 ±.009	.139 ±.004	50	0.10
568-210	3/4	1	1/8	.734 ±.010	.139 ±.004	50	0.10
568-211	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	50	0.12
568-212	7/8	1-1/8	1/8	.859 ±.010	.139 ±.004	50	0.12
568-213	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	50	0.12
568-214	1	1-1/4	1/8	.984 ±.010	.139 ±.004	50	0.17
568-215	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	50	0.19
568-216	1-1/8	1-3/8	1/8	1.109 ±.012	.139 ±.004	50	0.19
568-217	1-3/16	1-7/16	1/8	1.171 ±.012	.139 ±.004	50	0.20
568-218	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	50	0.20
568-219	1-5/16	1-9/16	1/8	1.296 ±.012	.139 ±.004	50	0.20
568-220	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	20	0.22
568-221	1-7/16	1-11/16	1/8	1.421 ±.012	.139 ±.004	20	0.23
568-222	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	20	0.26
568-223	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	20	0.29
568-224	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	20	0.54
568-225	1-7/8	2-1/8	1/8	1.859 ±.018	.139 ±.004	20	0.32
568-226	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	20	0.39
568-227	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	20	0.39
568-228	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	20	0.42
568-229	2-3/8	2-5/8	1/8	2.359 ±.020	.139 ±.004	20	0.47
568-230	2-1/2	2-3/4	1/8	2.484 ±.020	.139 ±.004	20	0.50
568-231	2-5/8	2-7/8	1/8	2.609 ±.020	.139 ±.004	20	0.53
568-232	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	20	0.53
568-233	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	20	0.56
568-234	3	3-1/4	1/8	2.984 ±.024	.139 ±.004	20	0.59
568-235	3-1/8	3-3/8	1/8	3.109 ±.024	.139 ±.004	20	0.62
568-236	3-1/4	3-1/2	1/8	3.234 ±.024	.139 ±.004	20	0.65
568-237	3-3/8	3-5/8	1/8	3.359 ±.024	.139 ±.004	20	0.65
568-238	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	20	0.69
568-239	3-5/8	3-7/8	1/8	3.609 ±.028	.139 ±.004	20	0.69
568-240	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	20	0.71
568-241	3-7/8	4-1/8	1/8	3.859 ±.028	.139 ±.004	20	0.72
568-242	4	4-1/4	1/8	3.984 ±.028	.139 ±.004	10	0.79
568-243	4-1/8	4-3/8	1/8	4.109 ±.028	.139 ±.004	10	0.85
568-244	4-1/4	4-1/2	1/8	4.234 ±.030	.139 ±.004	10	0.88
568-245	4-3/8	4-5/8	1/8	4.359 ±.030	.139 ±.004	10	0.98
568-246	4-1/2	4-3/4	1/8	4.484 ±.030	.139 ±.004	10	1.12
568-247	4-5/8	4-7/8	1/8	4.609 ±.030	.139 ±.004	10	1.15
568-248	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	10	1.18
568-249	4-7/8	5-1/8	1/8	4.859 ±.035	.139 ±.004	10	1.25
568-250	5	5-1/4	1/8	4.984 ±.035	.139 ±.004	10	1.25
568-251	5-1/8	5-3/8	1/8	5.109 ±.035	.139 ±.004	10	1.29
568-252	5-1/4	5-1/2	1/8	5.234 ±.035	.139 ±.004	10	1.29
568-253	5-3/8	5-5/8	1/8	5.359 ±.035	.139 ±.004	10	1.38
568-254	5-1/2	5-3/4	1/8	5.484 ±.035	.139 ±.004	5	1.51
568-255	5-5/8	5-7/8	1/8	5.609 ±.035	.139 ±.004	5	1.57
568-256	5-3/4	6	1/8	5.734 ±.035	.139 ±.004	5	1.64

STYLE 568, 70 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-257	5-7/8	6-1/8	1/8	5.859 ±.035	.139 ±.004	5	1.69
568-258	6	6-1/4	1/8	5.984 ±.035	.139 ±.004	5	1.76
568-259	6-1/4	6-1/2	1/8	6.234 ±.040	.139 ±.004	5	1.96
568-260	6-1/2	6-3/4	1/8	6.484 ±.040	.139 ±.004	5	1.96
568-261	6-3/4	7	1/8	6.734 ±.040	.139 ±.004	5	2.10
568-262	7	7-1/4	1/8	6.984 ±.040	.139 ±.004	5	2.16
568-263	7-1/4	7-1/2	1/8	7.234 ±.045	.139 ±.004	5	2.36
568-264	7-1/2	7-3/4	1/8	7.484 ±.045	.139 ±.004	5	2.41
568-265	7-3/4	8	1/8	7.734 ±.045	.139 ±.004	5	2.63
568-266	8	8-1/4	1/8	7.984 ±.045	.139 ±.004	5	2.68
568-267	8-1/4	8-1/2	1/8	8.234 ±.050	.139 ±.004	5	2.74
568-268	8-1/2	8-3/4	1/8	8.484 ±.050	.139 ±.004	1	3.00
568-269	8-3/4	9	1/8	8.734 ±.050	.139 ±.004	1	3.27
568-270	9	9-1/4	1/8	8.984 ±.050	.139 ±.004	1	3.27
568-271	9-1/4	9-1/2	1/8	9.234 ±.055	.139 ±.004	1	3.27
568-272	9-1/2	9-3/4	1/8	9.484 ±.055	.139 ±.004	1	3.27
568-273	9-3/4	10	1/8	9.734 ±.055	.139 ±.004	1	3.27
568-274	10	10-1/4	1/8	9.984 ±.055	.139 ±.004	1	3.27
568-275	10-1/2	10-3/4	1/8	10.484 ±.055	.139 ±.004	1	3.59
568-276	11	11-1/4	1/8	10.984 ±.065	.139 ±.004	1	3.92
568-277	11-1/2	11-3/4	1/8	11.484 ±.065	.139 ±.004	1	3.92
568-278	12	12-1/4	1/8	11.984 ±.065	.139 ±.004	1	4.24
568-279	13	13-1/4	1/8	12.984 ±.065	.139 ±.004	1	5.23
568-280	14	14-1/4	1/8	13.984 ±.065	.139 ±.004	1	6.42
568-281	15	15-1/4	1/8	14.984 ±.065	.139 ±.004	1	7.52
568-282	16	16-1/4	1/8	15.955 ±.075	.139 ±.004	1	8.18
568-283	17	17-1/4	1/8	16.955 ±.080	.139 ±.004	1	9.16
568-284	18	18-1/4	1/8	17.955 ±.085	.139 ±.004	1	10.45
3/16" C/S							
568-309	7/16	13/16	3/16	.412 ±.005	.210 ±.005	50	\$0.17
568-310	1/2	7/8	3/16	.475 ±.005	.210 ±.005	50	0.19
568-311	9/16	15/16	3/16	.537 ±.007	.210 ±.005	50	0.19
568-312	5/8	1	3/16	.600 ±.009	.210 ±.005	50	0.22
568-313	11/16	1-1/16	3/16	.662 ±.009	.210 ±.005	50	0.22
568-314	3/4	1-1/8	3/16	.725 ±.010	.210 ±.005	50	0.22
568-315	13/16	1-3/16	3/16	.787 ±.010	.210 ±.005	50	0.23
568-316	7/8	1-1/4	3/16	.850 ±.010	.210 ±.005	50	0.23
568-317	15/16	1-5/16	3/16	.912 ±.010	.210 ±.005	50	0.23
568-318	1	1-3/8	3/16	.975 ±.010	.210 ±.005	50	0.23
568-319	1-1/16	1-7/16	3/16	1.037 ±.010	.210 ±.005	50	0.27
568-320	1-1/8	1-1/2	3/16	1.100 ±.012	.210 ±.005	20	0.29
568-321	1-3/16	1-9/16	3/16	1.162 ±.012	.210 ±.005	20	0.29
568-322	1-1/4	1-5/8	3/16	1.225 ±.012	.210 ±.005	20	0.29
568-323	1-5/16	1-11/16	3/16	1.287 ±.012	.210 ±.005	20	0.29
568-324	1-3/8	1-3/4	3/16	1.350 ±.012	.210 ±.005	20	0.29
568-325	1-1/2	1-7/8	3/16	1.475 ±.015	.210 ±.005	20	0.32
568-326	1-5/8	2	3/16	1.600 ±.015	.210 ±.005	20	0.32
568-327	1-3/4	2-1/8	3/16	1.725 ±.015	.210 ±.005	20	0.42
568-328	1-7/8	2-1/4	3/16	1.850 ±.015	.210 ±.005	20	0.47
568-329	2	2-3/8	3/16	1.975 ±.018	.210 ±.005	20	0.50

STYLE 568, 70 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-330	2-1/8	2-1/2	3/16	2.100 ±018	.210 ±005	20	0.56
568-331	2-1/4	2-5/8	3/16	2.225 ±018	.210 ±005	20	0.59
568-332	2-3/8	2-3/4	3/16	2.350 ±018	.210 ±005	20	0.65
568-333	2-1/2	2-7/8	3/16	2.475 ±020	.210 ±005	20	0.71
568-334	2-5/8	3	3/16	2.600 ±020	.210 ±005	20	0.72
568-335	2-3/4	3-1/8	3/16	2.725 ±020	.210 ±005	10	0.79
568-336	2-7/8	3-1/4	3/16	2.850 ±020	.210 ±005	10	0.85
568-337	3	3-3/8	3/16	2.975 ±024	.210 ±005	10	0.88
568-338	3-1/8	3-1/2	3/16	3.100 ±024	.210 ±005	10	0.88
568-339	3-1/4	3-5/8	3/16	3.225 ±024	.210 ±005	10	0.98
568-340	3-3/8	3-3/4	3/16	3.350 ±024	.210 ±005	10	1.06
568-341	3-1/2	3-7/8	3/16	3.475 ±024	.210 ±005	10	1.06
568-342	3-5/8	4	3/16	3.600 ±028	.210 ±005	10	1.15
568-343	3-3/4	4-1/8	3/16	3.725 ±028	.210 ±005	10	1.18
568-344	3-7/8	4-1/4	3/16	3.850 ±028	.210 ±005	10	1.18
568-345	4	4-3/8	3/16	3.975 ±028	.210 ±005	10	1.29
568-346	4-1/8	4-1/2	3/16	4.100 ±028	.210 ±005	10	1.29
568-347	4-1/4	4-5/8	3/16	4.225 ±030	.210 ±005	10	1.29
568-348	4-3/8	4-3/4	3/16	4.350 ±030	.210 ±005	10	1.29
568-349	4-1/2	4-7/8	3/16	4.475 ±030	.210 ±005	10	1.44
568-350	4-5/8	5	3/16	4.600 ±030	.210 ±005	5	1.51
568-351	4-3/4	5-1/8	3/16	4.725 ±030	.210 ±005	5	1.51
568-352	4-7/8	5-1/4	3/16	4.850 ±030	.210 ±005	5	1.57
568-353	5	5-3/8	3/16	4.975 ±037	.210 ±005	5	1.64
568-354	5-1/8	5-1/2	3/16	5.100 ±037	.210 ±005	5	1.76
568-355	5-1/4	5-5/8	3/16	5.225 ±037	.210 ±005	5	1.96
568-356	5-3/8	5-3/4	3/16	5.350 ±037	.210 ±005	5	1.96
568-357	5-1/2	5-7/8	3/16	5.475 ±037	.210 ±005	5	2.02
568-358	5-5/8	6	3/16	5.600 ±037	.210 ±005	5	2.16
568-359	5-3/4	6-1/8	3/16	5.725 ±037	.210 ±005	5	2.16
568-360	5-7/8	6-1/4	3/16	5.850 ±037	.210 ±005	5	2.28
568-361	6	6-3/8	3/16	5.975 ±037	.210 ±005	5	2.36
568-362	6-1/4	6-5/8	3/16	6.225 ±040	.210 ±005	5	2.41
568-363	6-1/2	6-7/8	3/16	6.475 ±040	.210 ±005	5	2.52
568-364	6-3/4	7-1/8	3/16	6.725 ±040	.210 ±005	5	2.63
568-365	7	7-3/8	3/16	6.975 ±040	.210 ±005	5	2.74
568-366	7-1/4	7-5/8	3/16	7.225 ±045	.210 ±005	5	2.74
568-367	7-1/2	7-7/8	3/16	7.475 ±045	.210 ±005	5	2.74
568-368	7-3/4	8-1/8	3/16	7.725 ±045	.210 ±005	5	2.74
568-369	8	8-3/8	3/16	7.975 ±045	.210 ±005	1	3.05
568-370	8-1/4	8-5/8	3/16	8.225 ±050	.210 ±005	1	3.39
568-371	8-1/2	8-7/8	3/16	8.475 ±050	.210 ±005	1	3.53
568-372	8-3/4	9-1/8	3/16	8.725 ±050	.210 ±005	1	3.59
568-373	9	9-3/8	3/16	8.975 ±050	.210 ±005	1	3.92
568-374	9-1/4	9-5/8	3/16	9.225 ±055	.210 ±005	1	4.00
568-375	9-1/2	9-7/8	3/16	9.475 ±055	.210 ±005	1	4.06
568-376	9-3/4	10-1/8	3/16	9.725 ±055	.210 ±005	1	4.12
568-377	10	10-3/8	3/16	9.975 ±055	.210 ±005	1	4.12
568-378	10-1/2	10-7/8	3/16	10.475 ±060	.210 ±005	1	5.23
568-379	11	11-3/8	3/16	10.975 ±060	.210 ±005	1	5.55

STYLE 568, 70 DURO BUNA-N O-RINGS


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-380	11-1/2	11-7/8	3/16	11.475 ±.065	.210 ±.005	1	5.69
568-381	12	12-3/8	3/16	11.975 ±.065	.210 ±.005	1	5.89
568-382	13	13-3/8	3/16	12.975 ±.065	.210 ±.005	1	5.89
568-383	14	14-3/8	3/16	13.975 ±.070	.210 ±.005	1	7.85
568-384	15	15-3/8	3/16	14.975 ±.070	.210 ±.005	1	7.85
568-385	16	16-3/8	3/16	15.955 ±.075	.210 ±.005	1	9.16
568-386	17	17-3/8	3/16	16.955 ±.080	.210 ±.005	1	9.81
568-387	18	18-3/8	3/16	17.955 ±.085	.210 ±.005	1	11.12
568-388	19	19-3/8	3/16	18.955 ±.090	.210 ±.005	1	11.44
568-389	20	20-3/8	3/16	19.955 ±.095	.210 ±.005	1	11.44
568-390	21	21-3/8	3/16	20.955 ±.095	.210 ±.005	1	11.44
568-391	22	22-3/8	3/16	21.955 ±.100	.210 ±.005	1	11.77
568-392	23	23-3/8	3/16	22.940 ±.105	.210 ±.005	1	11.77
568-393	24	24-3/8	3/16	23.940 ±.110	.210 ±.005	1	18.95
568-394	25	25-3/8	3/16	24.940 ±.115	.210 ±.005	1	18.97
568-395	26	26-3/8	3/16	25.940 ±.120	.210 ±.005	1	20.93
1/4" C/S							
568-400	1-3/8	1-7/8	1/4	1.225 ±.012	.275 ±.006	5	\$3.07
568-401	1-1/2	2	1/4	1.475 ±.014	.275 ±.006	5	3.11
568-402	1-5/8	2-1/8	1/4	1.600 ±.015	.275 ±.006	5	3.20
568-403	1-3/4	2-1/4	1/4	1.725 ±.016	.275 ±.006	5	3.21
568-404	1-7/8	2-3/8	1/4	1.850 ±.016	.275 ±.006	5	3.26
568-405	2	2-1/2	1/4	1.975 ±.017	.275 ±.006	5	3.31
568-406	2-1/8	2-5/8	1/4	2.100 ±.018	.275 ±.006	5	3.35
568-407	2-1/4	2-3/4	1/4	2.225 ±.018	.275 ±.006	5	3.42
568-408	2-3/8	2-7/8	1/4	2.350 ±.020	.275 ±.006	5	3.46
568-409	2-1/2	3	1/4	2.475 ±.020	.275 ±.006	5	3.53
568-410	2-5/8	3-1/8	1/4	2.600 ±.020	.275 ±.006	5	3.58
568-411	2-3/4	3-1/4	1/4	2.725 ±.022	.275 ±.006	5	3.63
568-412	2-7/8	3-3/8	1/4	2.850 ±.022	.275 ±.006	5	3.68
568-413	3	3-1/2	1/4	2.975 ±.024	.275 ±.006	5	3.71
568-414	3-1/8	3-5/8	1/4	3.100 ±.024	.275 ±.006	5	3.76
568-415	3-1/4	3-3/4	1/4	3.225 ±.024	.275 ±.006	5	3.83
568-416	3-3/8	3-7/8	1/4	3.350 ±.026	.275 ±.006	5	3.87
568-417	3-1/2	4	1/4	3.475 ±.026	.275 ±.006	5	3.93
568-418	3-5/8	4-1/8	1/4	3.600 ±.026	.275 ±.006	5	3.98
568-419	3-3/4	4-1/4	1/4	3.725 ±.028	.275 ±.006	5	4.02
568-420	3-7/8	4-3/8	1/4	3.850 ±.028	.275 ±.006	5	4.08
568-421	4	4-1/2	1/4	3.975 ±.028	.275 ±.006	5	4.17
568-422	4-1/8	4-5/8	1/4	4.100 ±.030	.275 ±.006	5	4.23
568-423	4-1/4	4-3/4	1/4	4.225 ±.030	.275 ±.006	5	4.32
568-424	4-3/8	4-7/8	1/4	4.350 ±.030	.275 ±.006	5	4.44
568-425	4-1/2	5	1/4	4.475 ±.033	.275 ±.006	5	1.64
568-426	4-5/8	5-1/8	1/4	4.600 ±.033	.275 ±.006	5	1.64
568-427	4-3/4	5-1/4	1/4	4.725 ±.033	.275 ±.006	5	1.64
568-428	4-7/8	5-3/8	1/4	4.850 ±.033	.275 ±.006	5	1.76
568-429	5	5-1/2	1/4	4.975 ±.037	.275 ±.006	5	1.84
568-430	5-1/8	5-5/8	1/4	5.100 ±.037	.275 ±.006	5	1.84
568-431	5-1/4	5-3/4	1/4	5.225 ±.037	.275 ±.006	5	2.10
568-432	5-3/8	5-7/8	1/4	5.350 ±.037	.275 ±.006	5	2.13

STYLE 568, 70 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-433	5-1/2	6	1/4	5.475 ±.037	.275 ±.006	5	2.13
568-434	5-5/8	6-1/8	1/4	5.600 ±.037	.275 ±.006	5	2.16
568-435	5-3/4	6-1/4	1/4	5.725 ±.037	.275 ±.006	5	2.28
568-436	5-7/8	6-3/8	1/4	5.850 ±.037	.275 ±.006	5	2.28
568-437	6	6-1/2	1/4	5.975 ±.037	.275 ±.006	5	2.47
568-438	6-1/4	6-3/4	1/4	6.225 ±.040	.275 ±.006	5	2.63
568-439	6-1/2	7	1/4	6.475 ±.040	.275 ±.006	5	2.74
568-440	6-3/4	7-1/4	1/4	6.725 ±.040	.275 ±.006	1	2.94
568-441	7	7-1/2	1/4	6.975 ±.040	.275 ±.006	1	3.21
568-442	7-1/4	7-3/4	1/4	7.225 ±.045	.275 ±.006	1	3.27
568-443	7-1/2	8	1/4	7.475 ±.045	.275 ±.006	1	3.39
568-444	7-3/4	8-1/4	1/4	7.725 ±.045	.275 ±.006	1	3.59
568-445	8	8-1/2	1/4	7.975 ±.045	.275 ±.006	1	3.73
568-446	8-1/2	9	1/4	8.475 ±.055	.275 ±.006	1	3.86
568-447	9	9-1/2	1/4	8.975 ±.055	.275 ±.006	1	4.06
568-448	9-1/2	10	1/4	9.475 ±.055	.275 ±.006	1	4.06
568-449	10	10-1/2	1/4	9.975 ±.055	.275 ±.006	1	4.06
568-450	10-1/2	11	1/4	10.475 ±.060	.275 ±.006	1	4.91
568-451	11	11-1/2	1/4	10.975 ±.060	.275 ±.006	1	5.10
568-452	11-1/2	12	1/4	11.475 ±.060	.275 ±.006	1	5.55
568-453	12	12-1/2	1/4	11.975 ±.060	.275 ±.006	1	5.89
568-454	12-1/2	13	1/4	12.475 ±.060	.275 ±.006	1	6.22
568-455	13	13-1/2	1/4	12.975 ±.060	.275 ±.006	1	7.85
568-456	13-1/2	14	1/4	13.475 ±.070	.275 ±.006	1	7.85
568-457	14	14-1/2	1/4	13.975 ±.070	.275 ±.006	1	7.85
568-458	14-1/2	15	1/4	14.475 ±.070	.275 ±.006	1	7.85
568-459	15	15-1/2	1/4	14.975 ±.070	.275 ±.006	1	8.11
568-460	15-1/2	16	1/4	15.475 ±.070	.275 ±.006	1	8.50
568-461	16	16-1/2	1/4	15.955 ±.075	.275 ±.006	1	9.49
568-462	16-1/2	17	1/4	16.455 ±.075	.275 ±.006	1	9.81
568-463	17	17-1/2	1/4	16.955 ±.080	.275 ±.006	1	10.45
568-464	17-1/2	18	1/4	17.455 ±.085	.275 ±.006	1	11.12
568-465	18	18-1/2	1/4	17.955 ±.085	.275 ±.006	1	12.43
568-466	18-1/2	19	1/4	18.455 ±.085	.275 ±.006	1	12.43
568-467	19	19-1/2	1/4	18.955 ±.090	.275 ±.006	1	12.43
568-468	19-1/2	20	1/4	19.455 ±.090	.275 ±.006	1	13.08
568-469	20	20-1/2	1/4	19.955 ±.090	.275 ±.006	1	13.06
568-470	21	21-1/2	1/4	20.955 ±.090	.275 ±.006	1	13.09
568-471	22	22-1/2	1/4	21.955 ±.100	.275 ±.006	1	13.24
568-472	23	23-1/2	1/4	22.940 ±.105	.275 ±.006	1	13.31
568-473	24	24-1/2	1/4	23.940 ±.110	.275 ±.006	1	13.38
568-474	25	25-1/2	1/4	24.940 ±.115	.275 ±.006	1	13.53
568-475	26	26-1/2	1/4	25.940 ±.120	.275 ±.006	1	13.68

STYLE 568, BULK 70 DURO BUNA-N O-RINGS

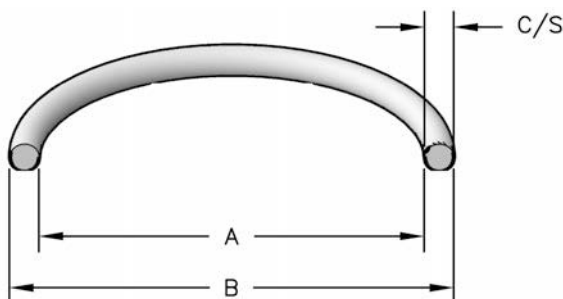

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/32" C/S							
568-001-B	1/32	3/32	1/32	.029 ±.004	.040 ±.003	1000	\$0.0589
3/64" C/S							
568-002-B	3/64	9/64	3/64	.042 ±.004	.050 ±.003	1000	\$0.0589
1/16" C/S							
568-003-B	1/16	3/16	1/16	.056 ±.004	.060 ±.003	1000	\$0.0589
568-004-B	5/64	13/64	1/16	.070 ±.005	.070 ±.003	1000	0.0589
568-005-B	3/32	7/32	1/16	.101 ±.005	.070 ±.003	1000	0.0589
568-006-B	1/8	1/4	1/16	.114 ±.005	.070 ±.003	1000	0.0295
568-007-B	5/32	9/32	1/16	.145 ±.005	.070 ±.003	1000	0.0295
568-008-B	3/16	5/16	1/16	.176 ±.005	.070 ±.003	1000	0.0295
568-009-B	7/32	11/32	1/16	.208 ±.005	.070 ±.003	1000	0.0295
568-010-B	1/4	3/8	1/16	.239 ±.005	.070 ±.003	1000	0.0589
568-011-B	5/16	7/16	1/16	.301 ±.005	.070 ±.003	1000	0.0589
568-012-B	3/8	1/2	1/16	.364 ±.005	.070 ±.003	1000	0.0589
568-013-B	7/16	9/16	1/16	.426 ±.005	.070 ±.003	1000	0.0589
568-014-B	1/2	5/8	1/16	.489 ±.005	.070 ±.003	1000	0.0589
568-015-B	9/16	11/16	1/16	.551 ±.007	.070 ±.003	1000	0.0736
568-016-B	5/8	3/4	1/16	.614 ±.009	.070 ±.003	1000	0.0736
568-017-B	11/16	13/16	1/16	.676 ±.009	.070 ±.003	1000	0.0884
568-018-B	3/4	7/8	1/16	.739 ±.009	.070 ±.003	1000	0.0884
568-019-B	13/16	15/16	1/16	.801 ±.009	.070 ±.003	1000	0.1032
568-020-B	7/8	1	1/16	.864 ±.009	.070 ±.003	1000	0.1032
568-021-B	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	1000	0.1032
568-022-B	1	1-1/8	1/16	.989 ±.010	.070 ±.003	1000	0.1032
568-023-B	1-1/16	1-3/16	1/16	1.051 ±.010	.070 ±.003	1000	0.1178
568-024-B	1-1/8	1-1/4	1/16	1.114 ±.010	.070 ±.003	1000	0.1178
568-025-B	1-3/16	1-5/16	1/16	1.176 ±.011	.070 ±.003	1000	0.1568
568-026-B	1-1/4	1-3/8	1/16	1.239 ±.011	.070 ±.003	1000	0.1725
568-027-B	1-5/16	1-7/16	1/16	1.301 ±.011	.070 ±.003	1000	0.1725
568-028-B	1-3/8	1-1/2	1/16	1.364 ±.013	.070 ±.003	400	0.1725
568-029-B	1-1/2	1-5/8	1/16	1.489 ±.013	.070 ±.003	400	0.1883
568-030-B	1-5/8	1-3/4	1/16	1.614 ±.013	.070 ±.003	400	0.2194
568-031-B	1-3/4	1-7/8	1/16	1.739 ±.015	.070 ±.003	400	0.251
568-032-B	1-7/8	2	1/16	1.864 ±.015	.070 ±.003	400	0.2822
568-033-B	2	2-1/8	1/16	1.989 ±.018	.070 ±.003	400	0.3451
568-034-B	2-1/8	2-1/4	1/16	2.114 ±.018	.070 ±.003	400	0.3763
568-035-B	2-1/4	2-3/8	1/16	2.239 ±.018	.070 ±.003	400	0.3763
568-036-B	2-3/8	2-1/2	1/16	2.364 ±.018	.070 ±.003	400	0.3922

STYLE 568, BULK 70 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-037-B	2-1/2	2-5/8	1/16	2.489 ±.018	.070 ±.003	400	0.3922
568-038-B	2-5/8	2-3/4	1/16	2.614 ±.020	.070 ±.003	400	0.4392
568-039-B	2-3/4	2-7/8	1/16	2.739 ±.020	.070 ±.003	400	0.4547
568-040-B	2-7/8	3	1/16	2.864 ±.020	.070 ±.003	400	0.4704
568-041-B	3	3-1/8	1/16	2.989 ±.024	.070 ±.003	400	0.5491
568-042-B	3-1/4	3-3/8	1/16	3.239 ±.024	.070 ±.003	400	0.5961
568-043-B	3-1/2	3-5/8	1/16	3.489 ±.024	.070 ±.003	400	0.6274
568-044-B	3-3/4	3-7/8	1/16	3.739 ±.027	.070 ±.003	400	0.7371
568-045-B	4	4-1/8	1/16	3.989 ±.027	.070 ±.003	400	0.7528
568-046-B	4-1/4	4-3/8	1/16	4.239 ±.030	.070 ±.003	200	0.8155
568-047-B	4-1/2	4-5/8	1/16	4.489 ±.030	.070 ±.003	200	0.8992
568-048-B	4-3/4	4-7/8	1/16	4.739 ±.030	.070 ±.003	200	1.0666
568-049-B	5	5-1/8	1/16	4.989 ±.037	.070 ±.003	200	1.3803
568-050-B	5-1/4	5-3/8	1/16	5.239 ±.037	.070 ±.003	200	1.3803
3/32" C/S							
568-102-B	1/16	1/4	3/32	.049 ±.005	.103 ±.003	1000	\$0.0884
568-103-B	3/32	9/32	3/32	.081 ±.005	.103 ±.003	1000	0.0884
568-104-B	1/8	5/16	3/32	.112 ±.005	.103 ±.003	1000	0.0589
568-105-B	5/32	11/32	3/32	.143 ±.005	.103 ±.003	1000	0.0589
568-106-B	3/16	3/8	3/32	.174 ±.005	.103 ±.003	1000	0.0589
568-107-B	7/32	13/32	3/32	.206 ±.005	.103 ±.003	1000	0.0589
568-108-B	1/4	7/16	3/32	.237 ±.005	.103 ±.003	1000	0.1178
568-109-B	5/16	1/2	3/32	.299 ±.005	.103 ±.003	1000	0.0589
568-110-B	3/8	9/16	3/32	.362 ±.005	.103 ±.003	1000	0.0736
568-111-B	7/16	5/8	3/32	.424 ±.005	.103 ±.003	1000	0.0736
568-112-B	1/2	11/16	3/32	.487 ±.005	.103 ±.003	1000	0.0736
568-113-B	9/16	3/4	3/32	.549 ±.005	.103 ±.003	1000	0.0736
568-114-B	5/8	13/16	3/32	.612 ±.009	.103 ±.003	1000	0.0884
568-115-B	11/16	7/8	3/32	.674 ±.009	.103 ±.003	1000	0.0884
568-116-B	3/4	15/16	3/32	.737 ±.009	.103 ±.003	1000	0.0884
568-117-B	13/16	1	3/32	.799 ±.010	.103 ±.003	1000	0.0884
568-118-B	7/8	1-1/16	3/32	.862 ±.010	.103 ±.003	1000	0.1032
568-119-B	15/16	1-1/8	3/32	.924 ±.010	.103 ±.003	1000	0.1032
568-120-B	1	1-3/16	3/32	.987 ±.010	.103 ±.003	1000	0.1032
568-121-B	1-1/16	1-1/4	3/32	1.049 ±.010	.103 ±.003	1000	0.1178
568-122-B	1-1/8	1-5/16	3/32	1.112 ±.010	.103 ±.003	1000	0.1178
568-123-B	1-3/16	1-3/8	3/32	1.174 ±.012	.103 ±.003	1000	0.1178
568-124-B	1-1/4	1-7/16	3/32	1.237 ±.012	.103 ±.003	1000	0.1725
568-125-B	1-5/16	1-1/2	3/32	1.299 ±.012	.103 ±.003	1000	0.1725
568-126-B	1-3/8	1-9/16	3/32	1.362 ±.012	.103 ±.003	400	0.1883
568-127-B	1-7/16	1-5/8	3/32	1.424 ±.012	.103 ±.003	400	0.204
568-128-B	1-1/2	1-11/16	3/32	1.487 ±.012	.103 ±.003	400	0.2194
568-129-B	1-9/16	1-3/4	3/32	1.549 ±.015	.103 ±.003	400	0.2194
568-130-B	1-5/8	1-13/16	3/32	1.612 ±.015	.103 ±.003	400	0.251
568-131-B	1-11/16	1-7/8	3/32	1.674 ±.015	.103 ±.003	400	0.2665
568-132-B	1-3/4	1-15/16	3/32	1.737 ±.015	.103 ±.003	400	0.2665
568-133-B	1-13/16	2	3/32	1.799 ±.015	.103 ±.003	400	0.2822
568-134-B	1-7/8	2-1/16	3/32	1.862 ±.015	.103 ±.003	400	0.2822
568-135-B	1-15/16	2-1/8	3/32	1.925 ±.017	.103 ±.003	400	0.2822
568-136-B	2	2-3/16	3/32	1.987 ±.017	.103 ±.003	400	0.2981

STYLE 568, BULK 70 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-137-B	2-1/16	2-1/4	3/32	2.050 ±017	.103 ±003	400	0.2981
568-138-B	2-1/8	2-5/16	3/32	2.112 ±017	.103 ±003	400	0.3451
568-139-B	2-3/16	2-3/8	3/32	2.175 ±017	.103 ±003	400	0.3451
568-140-B	2-1/4	2-7/16	3/32	2.237 ±017	.103 ±003	400	0.3451
568-141-B	2-5/16	2-1/2	3/32	2.300 ±020	.103 ±003	400	0.3922
568-142-B	2-3/8	2-9/16	3/32	2.362 ±020	.103 ±003	400	0.3922
568-143-B	2-7/16	2-5/8	3/32	2.425 ±020	.103 ±003	400	0.3922
568-144-B	2-1/2	2-11/16	3/32	2.487 ±020	.103 ±003	400	0.4392
568-145-B	2-9/16	2-3/4	3/32	2.550 ±020	.103 ±003	400	0.4392
568-146-B	2-5/8	2-13/16	3/32	2.612 ±020	.103 ±003	400	0.4392
568-147-B	2-11/16	2-7/8	3/32	2.675 ±022	.103 ±003	400	0.4392
568-148-B	2-3/4	2-15/16	3/32	2.737 ±022	.103 ±003	400	0.4392
568-149-B	2-13/16	3	3/32	2.800 ±022	.103 ±003	400	0.4547
568-150-B	2-7/8	3-1/16	3/32	2.862 ±022	.103 ±003	400	0.4547
568-151-B	3	3-3/16	3/32	2.987 ±024	.103 ±003	400	0.5021
568-152-B	3-1/4	3-7/16	3/32	3.237 ±024	.103 ±003	400	0.5961
568-153-B	3-1/2	3-11/16	3/32	3.487 ±024	.103 ±003	400	0.6274
568-154-B	3-3/4	3-15/16	3/32	3.737 ±028	.103 ±003	400	0.6274
568-155-B	4	4-3/16	3/32	3.987 ±028	.103 ±003	200	0.8155
568-156-B	4-1/4	4-7/16	3/32	4.237 ±030	.103 ±003	200	1.0036
568-157-B	4-1/2	4-11/16	3/32	4.487 ±030	.103 ±003	200	1.0351
568-158-B	4-3/4	4-15/16	3/32	4.737 ±030	.103 ±003	200	1.0666
568-159-B	5	5-3/16	3/32	4.987 ±035	.103 ±003	200	1.1605
568-160-B	5-1/4	5-7/16	3/32	5.237 ±035	.103 ±003	200	1.2389
568-161-B	5-1/2	5-11/16	3/32	5.487 ±035	.103 ±003	200	1.3803
568-162-B	5-3/4	5-15/16	3/32	5.737 ±035	.103 ±003	200	1.6311
568-163-B	6	6-3/16	3/32	5.987 ±035	.103 ±003	200	1.6939
568-164-B	6-1/4	6-7/16	3/32	6.237 ±040	.103 ±003	200	1.882
568-165-B	6-1/2	6-11/16	3/32	6.487 ±040	.103 ±003	200	1.945
568-166-B	6-3/4	6-15/16	3/32	6.737 ±040	.103 ±003	200	1.945
568-167-B	7	7-3/16	3/32	6.987 ±040	.103 ±003	200	1.945
568-168-B	7-1/4	7-7/16	3/32	7.237 ±045	.103 ±003	200	2.133
568-169-B	7-1/2	7-11/16	3/32	7.487 ±045	.103 ±003	200	2.1956
568-170-B	7-3/4	7-15/16	3/32	7.737 ±045	.103 ±003	200	2.2584
568-171-B	8	8-3/16	3/32	7.987 ±045	.103 ±003	100	2.8231
568-172-B	8-1/4	8-7/16	3/32	8.237 ±050	.103 ±003	100	2.9329
568-173-B	8-1/2	8-11/16	3/32	8.487 ±050	.103 ±003	100	3.1368
568-174-B	8-3/4	8-15/16	3/32	8.737 ±050	.103 ±003	100	3.4501
568-175-B	9	9-3/16	3/32	8.987 ±050	.103 ±003	100	3.764
568-176-B	9-1/4	9-7/16	3/32	9.237 ±055	.103 ±003	100	4.062
568-177-B	9-1/2	9-11/16	3/32	9.487 ±055	.103 ±003	100	4.203
568-178-B	9-3/4	9-15/16	3/32	9.737 ±055	.103 ±003	100	4.3915
1/8" C/S							
568-201-B	3/16	7/16	1/8	.171 ±005	.139 ±004	1000	\$0.0589
568-202-B	1/4	1/2	1/8	.234 ±005	.139 ±004	1000	0.0589
568-203-B	5/16	9/16	1/8	.296 ±005	.139 ±004	1000	0.0736
568-204-B	3/8	5/8	1/8	.359 ±005	.139 ±004	1000	0.0736
568-205-B	7/16	11/16	1/8	.421 ±005	.139 ±004	1000	0.0736
568-206-B	1/2	3/4	1/8	.484 ±005	.139 ±004	1000	0.0884
568-207-B	9/16	13/16	1/8	.546 ±007	.139 ±004	1000	0.0884

STYLE 568, BULK 70 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-208-B	5/8	7/8	1/8	.609 ±.009	.139 ±.004	1000	0.1032
568-209-B	11/16	15/16	1/8	.671 ±.009	.139 ±.004	1000	0.1032
568-210-B	3/4	1	1/8	.734 ±.010	.139 ±.004	1000	0.1032
568-211-B	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	1000	0.1178
568-212-B	7/8	1-1/8	1/8	.859 ±.010	.139 ±.004	1000	0.1178
568-213-B	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	1000	0.1178
568-214-B	1	1-1/4	1/8	.984 ±.010	.139 ±.004	1000	0.1568
568-215-B	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	1000	0.1725
568-216-B	1-1/8	1-3/8	1/8	1.109 ±.012	.139 ±.004	1000	0.1725
568-217-B	1-3/16	1-7/16	1/8	1.171 ±.012	.139 ±.004	1000	0.1883
568-218-B	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	1000	0.1883
568-219-B	1-5/16	1-9/16	1/8	1.296 ±.012	.139 ±.004	1000	0.1883
568-220-B	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	400	0.204
568-221-B	1-7/16	1-11/16	1/8	1.421 ±.012	.139 ±.004	400	0.2194
568-222-B	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	400	0.251
568-223-B	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	400	0.2822
568-224-B	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	400	0.2981
568-225-B	1-7/8	2-1/8	1/8	1.859 ±.018	.139 ±.004	400	0.3136
568-226-B	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	400	0.3763
568-227-B	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	400	0.3763
568-228-B	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	400	0.3922
568-229-B	2-3/8	2-5/8	1/8	2.359 ±.020	.139 ±.004	400	0.4392
568-230-B	2-1/2	2-3/4	1/8	2.484 ±.020	.139 ±.004	400	0.4704
568-231-B	2-5/8	2-7/8	1/8	2.609 ±.020	.139 ±.004	400	0.5021
568-232-B	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	400	0.5021
568-233-B	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	400	0.5331
568-234-B	3	3-1/4	1/8	2.984 ±.024	.139 ±.004	400	0.5647
568-235-B	3-1/8	3-3/8	1/8	3.109 ±.024	.139 ±.004	400	0.5961
568-236-B	3-1/4	3-1/2	1/8	3.234 ±.024	.139 ±.004	400	0.6274
568-237-B	3-3/8	3-5/8	1/8	3.359 ±.024	.139 ±.004	400	0.6274
568-238-B	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	400	0.6587
568-239-B	3-5/8	3-7/8	1/8	3.609 ±.028	.139 ±.004	400	0.6587
568-240-B	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	400	0.6743
568-241-B	3-7/8	4-1/8	1/8	3.859 ±.028	.139 ±.004	400	0.69
568-242-B	4	4-1/4	1/8	3.984 ±.028	.139 ±.004	200	0.7528
568-243-B	4-1/8	4-3/8	1/8	4.109 ±.028	.139 ±.004	200	0.8155
568-244-B	4-1/4	4-1/2	1/8	4.234 ±.030	.139 ±.004	200	0.8468
568-245-B	4-3/8	4-5/8	1/8	4.359 ±.030	.139 ±.004	200	0.941
568-246-B	4-1/2	4-3/4	1/8	4.484 ±.030	.139 ±.004	200	1.0666
568-247-B	4-5/8	4-7/8	1/8	4.609 ±.030	.139 ±.004	200	1.0978
568-248-B	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	200	1.1291
568-249-B	4-7/8	5-1/8	1/8	4.859 ±.035	.139 ±.004	200	1.1919
568-250-B	5	5-1/4	1/8	4.984 ±.035	.139 ±.004	200	1.1919
568-251-B	5-1/8	5-3/8	1/8	5.109 ±.035	.139 ±.004	200	1.2389
568-252-B	5-1/4	5-1/2	1/8	5.234 ±.035	.139 ±.004	200	1.2389
568-253-B	5-3/8	5-5/8	1/8	5.359 ±.035	.139 ±.004	200	1.3172
568-254-B	5-1/2	5-3/4	1/8	5.484 ±.035	.139 ±.004	200	1.4429
568-255-B	5-5/8	5-7/8	1/8	5.609 ±.035	.139 ±.004	200	1.5058
568-256-B	5-3/4	6	1/8	5.734 ±.035	.139 ±.004	200	1.5682
568-257-B	5-7/8	6-1/8	1/8	5.859 ±.035	.139 ±.004	200	1.6311

STYLE 568, BULK 70 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-258-B	6	6-1/4	1/8	5.984 ±.035	.139 ±.004	200	1.6939
568-259-B	6-1/4	6-1/2	1/8	6.234 ±.040	.139 ±.004	200	1.882
568-260-B	6-1/2	6-3/4	1/8	6.484 ±.040	.139 ±.004	200	1.882
568-261-B	6-3/4	7	1/8	6.734 ±.040	.139 ±.004	200	2.0075
568-262-B	7	7-1/4	1/8	6.984 ±.040	.139 ±.004	200	2.0703
568-263-B	7-1/4	7-1/2	1/8	7.234 ±.045	.139 ±.004	200	2.2584
568-264-B	7-1/2	7-3/4	1/8	7.484 ±.045	.139 ±.004	200	2.3212
568-265-B	7-3/4	8	1/8	7.734 ±.045	.139 ±.004	200	2.5095
568-266-B	8	8-1/4	1/8	7.984 ±.045	.139 ±.004	100	2.572
568-267-B	8-1/4	8-1/2	1/8	8.234 ±.050	.139 ±.004	100	2.6348
568-268-B	8-1/2	8-3/4	1/8	8.484 ±.050	.139 ±.004	100	2.8857
568-269-B	8-3/4	9	1/8	8.734 ±.050	.139 ±.004	100	3.1368
568-270-B	9	9-1/4	1/8	8.984 ±.050	.139 ±.004	100	3.1368
568-271-B	9-1/4	9-1/2	1/8	9.234 ±.055	.139 ±.004	100	3.1368
568-272-B	9-1/2	9-3/4	1/8	9.484 ±.055	.139 ±.004	100	3.1368
568-273-B	9-3/4	10	1/8	9.734 ±.055	.139 ±.004	100	3.1368
568-274-B	10	10-1/4	1/8	9.984 ±.055	.139 ±.004	100	3.1368
568-275-B	10-1/2	10-3/4	1/8	10.484 ±.055	.139 ±.004	100	3.4504
568-276-B	11	11-1/4	1/8	10.984 ±.065	.139 ±.004	100	3.764
568-277-B	11-1/2	11-3/4	1/8	11.484 ±.065	.139 ±.004	100	3.764
568-278-B	12	12-1/4	1/8	11.984 ±.065	.139 ±.004	100	4.062
568-279-B	13	13-1/4	1/8	12.984 ±.065	.139 ±.004	100	5.0186
568-280-B	14	14-1/4	1/8	13.984 ±.065	.139 ±.004	100	6.148
568-281-B	15	15-1/4	1/8	14.984 ±.065	.139 ±.004	100	7.2145
568-282-B	16	16-1/4	1/8	15.955 ±.075	.139 ±.004	100	7.8419
568-283-B	17	17-1/4	1/8	16.955 ±.080	.139 ±.004	100	8.7829
568-284-B	18	18-1/4	1/8	17.955 ±.085	.139 ±.004	100	10.0374
3/16" C/S							
568-309-B	7/16	13/16	3/16	.412 ±.005	.210 ±.005	1000	\$0.1568
568-310-B	1/2	7/8	3/16	.475 ±.005	.210 ±.005	1000	0.1725
568-311-B	9/16	15/16	3/16	.537 ±.007	.210 ±.005	1000	0.1725
568-312-B	5/8	1	3/16	.600 ±.009	.210 ±.005	1000	0.204
568-313-B	11/16	1-1/16	3/16	.662 ±.009	.210 ±.005	1000	0.204
568-314-B	3/4	1-1/8	3/16	.725 ±.010	.210 ±.005	1000	0.204
568-315-B	13/16	1-3/16	3/16	.787 ±.010	.210 ±.005	1000	0.2194
568-316-B	7/8	1-1/4	3/16	.850 ±.010	.210 ±.005	1000	0.2194
568-317-B	15/16	1-5/16	3/16	.912 ±.010	.210 ±.005	1000	0.2194
568-318-B	1	1-3/8	3/16	.975 ±.010	.210 ±.005	1000	0.2194
568-319-B	1-1/16	1-7/16	3/16	1.037 ±.010	.210 ±.005	1000	0.2665
568-320-B	1-1/8	1-1/2	3/16	1.100 ±.012	.210 ±.005	1000	0.2822
568-321-B	1-3/16	1-9/16	3/16	1.162 ±.012	.210 ±.005	1000	0.2822
568-322-B	1-1/4	1-5/8	3/16	1.225 ±.012	.210 ±.005	1000	0.2822
568-323-B	1-5/16	1-11/16	3/16	1.287 ±.012	.210 ±.005	1000	0.2822
568-324-B	1-3/8	1-3/4	3/16	1.350 ±.012	.210 ±.005	400	0.2822
568-325-B	1-1/2	1-7/8	3/16	1.475 ±.015	.210 ±.005	400	0.3136
568-326-B	1-5/8	2	3/16	1.600 ±.015	.210 ±.005	400	0.3136
568-327-B	1-3/4	2-1/8	3/16	1.725 ±.015	.210 ±.005	400	0.3922
568-328-B	1-7/8	2-1/4	3/16	1.850 ±.015	.210 ±.005	400	0.4392
568-329-B	2	2-3/8	3/16	1.975 ±.018	.210 ±.005	400	0.4704
568-330-B	2-1/8	2-1/2	3/16	2.100 ±.018	.210 ±.005	400	0.5331

STYLE 568, BULK 70 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-331-B	2-1/4	2-5/8	3/16	2.225 ±.018	.210 ±.005	400	0.5647
568-332-B	2-3/8	2-3/4	3/16	2.350 ±.018	.210 ±.005	400	0.6274
568-333-B	2-1/2	2-7/8	3/16	2.475 ±.020	.210 ±.005	400	0.6743
568-334-B	2-5/8	3	3/16	2.600 ±.020	.210 ±.005	400	0.69
568-335-B	2-3/4	3-1/8	3/16	2.725 ±.020	.210 ±.005	400	0.7528
568-336-B	2-7/8	3-1/4	3/16	2.850 ±.020	.210 ±.005	400	0.8155
568-337-B	3	3-3/8	3/16	2.975 ±.024	.210 ±.005	400	0.8468
568-338-B	3-1/8	3-1/2	3/16	3.100 ±.024	.210 ±.005	400	0.8468
568-339-B	3-1/4	3-5/8	3/16	3.225 ±.024	.210 ±.005	400	0.941
568-340-B	3-3/8	3-3/4	3/16	3.350 ±.024	.210 ±.005	400	1.0036
568-341-B	3-1/2	3-7/8	3/16	3.475 ±.024	.210 ±.005	400	1.0036
568-342-B	3-5/8	4	3/16	3.600 ±.028	.210 ±.005	400	1.0978
568-343-B	3-3/4	4-1/8	3/16	3.725 ±.028	.210 ±.005	400	1.1291
568-344-B	3-7/8	4-1/4	3/16	3.850 ±.028	.210 ±.005	400	1.1291
568-345-B	4	4-3/8	3/16	3.975 ±.028	.210 ±.005	200	1.2389
568-346-B	4-1/8	4-1/2	3/16	4.100 ±.028	.210 ±.005	200	1.2389
568-347-B	4-1/4	4-5/8	3/16	4.225 ±.030	.210 ±.005	200	1.2389
568-348-B	4-3/8	4-3/4	3/16	4.350 ±.030	.210 ±.005	200	1.2389
568-349-B	4-1/2	4-7/8	3/16	4.475 ±.030	.210 ±.005	200	1.3803
568-350-B	4-5/8	5	3/16	4.600 ±.030	.210 ±.005	200	1.4429
568-351-B	4-3/4	5-1/8	3/16	4.725 ±.030	.210 ±.005	200	1.4429
568-352-B	4-7/8	5-1/4	3/16	4.850 ±.030	.210 ±.005	200	1.5058
568-353-B	5	5-3/8	3/16	4.975 ±.037	.210 ±.005	200	1.5682
568-354-B	5-1/8	5-1/2	3/16	5.100 ±.037	.210 ±.005	200	1.6939
568-355-B	5-1/4	5-5/8	3/16	5.225 ±.037	.210 ±.005	200	1.882
568-356-B	5-3/8	5-3/4	3/16	5.350 ±.037	.210 ±.005	200	1.882
568-357-B	5-1/2	5-7/8	3/16	5.475 ±.037	.210 ±.005	200	1.945
568-358-B	5-5/8	6	3/16	5.600 ±.037	.210 ±.005	200	2.0703
568-359-B	5-3/4	6-1/8	3/16	5.725 ±.037	.210 ±.005	200	2.0703
568-360-B	5-7/8	6-1/4	3/16	5.850 ±.037	.210 ±.005	200	2.1956
568-361-B	6	6-3/8	3/16	5.975 ±.037	.210 ±.005	200	2.2584
568-362-B	6-1/4	6-5/8	3/16	6.225 ±.040	.210 ±.005	200	2.3212
568-363-B	6-1/2	6-7/8	3/16	6.475 ±.040	.210 ±.005	200	2.4153
568-364-B	6-3/4	7-1/8	3/16	6.725 ±.040	.210 ±.005	200	2.5095
568-365-B	7	7-3/8	3/16	6.975 ±.040	.210 ±.005	200	2.6348
568-366-B	7-1/4	7-5/8	3/16	7.225 ±.045	.210 ±.005	200	2.6348
568-367-B	7-1/2	7-7/8	3/16	7.475 ±.045	.210 ±.005	200	2.6348
568-368-B	7-3/4	8-1/8	3/16	7.725 ±.045	.210 ±.005	200	2.6348
568-369-B	8	8-3/8	3/16	7.975 ±.045	.210 ±.005	100	2.9329
568-370-B	8-1/4	8-5/8	3/16	8.225 ±.050	.210 ±.005	100	3.2622
568-371-B	8-1/2	8-7/8	3/16	8.475 ±.050	.210 ±.005	100	3.3879
568-372-B	8-3/4	9-1/8	3/16	8.725 ±.050	.210 ±.005	100	3.4504
568-373-B	9	9-3/8	3/16	8.975 ±.050	.210 ±.005	100	3.764
568-374-B	9-1/4	9-5/8	3/16	9.225 ±.055	.210 ±.005	100	3.8267
568-375-B	9-1/2	9-7/8	3/16	9.475 ±.055	.210 ±.005	100	3.8894
568-376-B	9-3/4	10-1/8	3/16	9.725 ±.055	.210 ±.005	100	3.9523
568-377-B	10	10-3/8	3/16	9.975 ±.055	.210 ±.005	100	3.9523
568-378-B	10-1/2	10-7/8	3/16	10.475 ±.060	.210 ±.005	100	5.0186
568-379-B	11	11-3/8	3/16	10.975 ±.060	.210 ±.005	100	5.3323
568-380-B	11-1/2	11-7/8	3/16	11.475 ±.065	.210 ±.005	100	5.4578

STYLE 568, BULK 70 DURO BUNA-N O-RINGS


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-381-B	12	12-3/8	3/16	11.975 ±.065	.210 ±.005	100	5.646
568-382-B	13	13-3/8	3/16	12.975 ±.065	.210 ±.005	100	5.646
568-383-B	14	14-3/8	3/16	13.975 ±.070	.210 ±.005	100	7.5282
568-384-B	15	15-3/8	3/16	14.975 ±.070	.210 ±.005	100	7.5282
568-385-B	16	16-3/8	3/16	15.955 ±.075	.210 ±.005	100	8.7829
568-386-B	17	17-3/8	3/16	16.955 ±.080	.210 ±.005	100	9.4101
568-387-B	18	18-3/8	3/16	17.955 ±.085	.210 ±.005	100	10.6648
568-388-B	19	19-3/8	3/16	18.955 ±.090	.210 ±.005	20	10.9785
568-389-B	20	20-3/8	3/16	19.955 ±.095	.210 ±.005	20	10.9785
568-390-B	21	21-3/8	3/16	20.955 ±.095	.210 ±.005	20	10.9785
568-391-B	22	22-3/8	3/16	21.955 ±.100	.210 ±.005	20	11.2921
568-392-B	23	23-3/8	3/16	22.940 ±.105	.210 ±.005	20	11.2921
568-393-B	24	24-3/8	3/16	23.940 ±.110	.210 ±.005	20	18.1774
568-394-B	25	25-3/8	3/16	24.940 ±.115	.210 ±.005	20	18.193
568-395-B	26	26-3/8	3/16	25.940 ±.120	.210 ±.005	20	20.075
1/4" C/S							
568-425-B	4-1/2	5	1/4	4.475 ±.033	.275 ±.006	200	\$ 1.5682
568-426-B	4-5/8	5-1/8	1/4	4.600 ±.033	.275 ±.006	200	1.5682
568-427-B	4-3/4	5-1/4	1/4	4.725 ±.033	.275 ±.006	200	1.5682
568-428-B	4-7/8	5-3/8	1/4	4.850 ±.033	.275 ±.006	200	1.6939
568-429-B	5	5-1/2	1/4	4.975 ±.037	.275 ±.006	200	1.7565
568-430-B	5-1/8	5-5/8	1/4	5.100 ±.037	.275 ±.006	200	1.7565
568-431-B	5-1/4	5-3/4	1/4	5.225 ±.037	.275 ±.006	200	2.0075
568-432-B	5-3/8	5-7/8	1/4	5.350 ±.037	.275 ±.006	200	2.0387
568-433-B	5-1/2	6	1/4	5.475 ±.037	.275 ±.006	200	2.0387
568-434-B	5-5/8	6-1/8	1/4	5.600 ±.037	.275 ±.006	200	2.0703
568-435-B	5-3/4	6-1/4	1/4	5.725 ±.037	.275 ±.006	200	2.1956
568-436-B	5-7/8	6-3/8	1/4	5.850 ±.037	.275 ±.006	200	2.1956
568-437-B	6	6-1/2	1/4	5.975 ±.037	.275 ±.006	200	2.3682
568-438-B	6-1/4	6-3/4	1/4	6.225 ±.040	.275 ±.006	200	2.5095
568-439-B	6-1/2	7	1/4	6.475 ±.040	.275 ±.006	200	2.6348
568-440-B	6-3/4	7-1/4	1/4	6.725 ±.040	.275 ±.006	200	2.8231
568-441-B	7	7-1/2	1/4	6.975 ±.040	.275 ±.006	200	3.0741
568-442-B	7-1/4	7-3/4	1/4	7.225 ±.045	.275 ±.006	200	3.1368
568-443-B	7-1/2	8	1/4	7.475 ±.045	.275 ±.006	200	3.2622
568-444-B	7-3/4	8-1/4	1/4	7.725 ±.045	.275 ±.006	200	3.4504
568-445-B	8	8-1/2	1/4	7.975 ±.045	.275 ±.006	100	3.5759
568-446-B	8-1/2	9	1/4	8.475 ±.055	.275 ±.006	100	3.7015
568-447-B	9	9-1/2	1/4	8.975 ±.055	.275 ±.006	100	3.8894
568-448-B	9-1/2	10	1/4	9.475 ±.055	.275 ±.006	100	3.8894
568-449-B	10	10-1/2	1/4	9.975 ±.055	.275 ±.006	100	3.8894
568-450-B	10-1/2	11	1/4	10.475 ±.060	.275 ±.006	100	4.7051
568-451-B	11	11-1/2	1/4	10.975 ±.060	.275 ±.006	100	4.8933
568-452-B	11-1/2	12	1/4	11.475 ±.060	.275 ±.006	100	5.3323
568-453-B	12	12-1/2	1/4	11.975 ±.060	.275 ±.006	100	5.646
568-454-B	12-1/2	13	1/4	12.475 ±.060	.275 ±.006	100	5.9597
568-455-B	13	13-1/2	1/4	12.975 ±.060	.275 ±.006	100	7.5282
568-456-B	13-1/2	14	1/4	13.475 ±.070	.275 ±.006	100	7.5282
568-457-B	14	14-1/2	1/4	13.975 ±.070	.275 ±.006	20	7.5282
568-458-B	14-1/2	15	1/4	14.475 ±.070	.275 ±.006	20	7.5282

STYLE 568, BULK 70 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-459-B	15	15-1/2	1/4	14.975 ±.070	.275 ±.006	20	7.7793
568-460-B	15-1/2	16	1/4	15.475 ±.070	.275 ±.006	20	8.1554
568-461-B	16	16-1/2	1/4	15.955 ±.075	.275 ±.006	20	9.0965
568-462-B	16-1/2	17	1/4	16.455 ±.075	.275 ±.006	20	9.4101
568-463-B	17	17-1/2	1/4	16.955 ±.080	.275 ±.006	20	10.0374
568-464-B	17-1/2	18	1/4	17.455 ±.085	.275 ±.006	20	10.6648
568-465-B	18	18-1/2	1/4	17.955 ±.085	.275 ±.006	20	11.9196
568-466-B	18-1/2	19	1/4	18.455 ±.085	.275 ±.006	20	11.9196
568-467-B	19	19-1/2	1/4	18.955 ±.090	.275 ±.006	20	11.9196
568-468-B	19-1/2	20	1/4	19.455 ±.090	.275 ±.006	20	12.547
568-469-B	20	20-1/2	1/4	19.955 ±.090	.275 ±.006	20	12.5313
568-470-B	21	21-1/2	1/4	20.955 ±.090	.275 ±.006	20	12.6352
568-471-B	22	22-1/2	1/4	21.955 ±.100	.275 ±.006	20	12.7755
568-472-B	23	23-1/2	1/4	22.940 ±.105	.275 ±.006	20	12.8456
568-473-B	24	24-1/2	1/4	23.940 ±.110	.275 ±.006	20	12.9159
568-474-B	25	25-1/2	1/4	24.940 ±.115	.275 ±.006	20	13.0561
568-475-B	26	26-1/2	1/4	25.940 ±.120	.275 ±.006	20	13.1966

STYLE 568C AND 580C, 70 DURO BUNA-N O-RING CORD

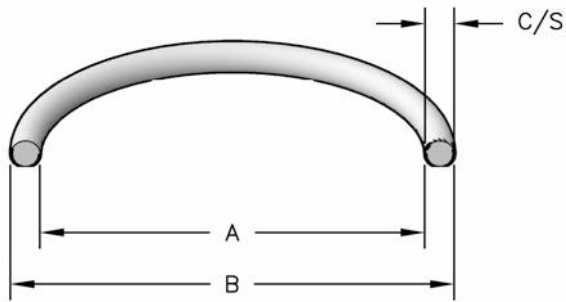


SOLD BY FOOT

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Cord) - (Nominal)

Part Number	Nom. Cross Section	C HEIGHT	CROSS SECTION	List Price
568C-062	1/16		.070 ±.006	\$0.62
568C-093	3/32		.103 ±.007	0.75
568C-125	1/8		.139 ±.007	0.85
568C-187	3/16		.210 ±.008	1.08
568C-250	1/4		.275 ±.008	1.26
568C-313	5/16		.313 ±.012	1.76
568C-375	3/8		.375 ±.012	2.76
568C-437	7/16		.437 ±.012	2.48
568C-500	1/2		.500 ±.012	3.42
580C-093	3/32	.099 ±.005	.099 ±.005	0.84
580C-125	1/8	.134 ±.006	.134 ±.006	1.05
580C-187	3/16	.203 ±.007	.203 ±.007	1.29
580C-250	1/4	.266 ±.007	.266 ±.007	1.56

STYLE 568, 90 DURO BUNA-N O-RINGS

Reduced prices are available for large quantity purchases of 70 & 90 Durometer O-Rings.

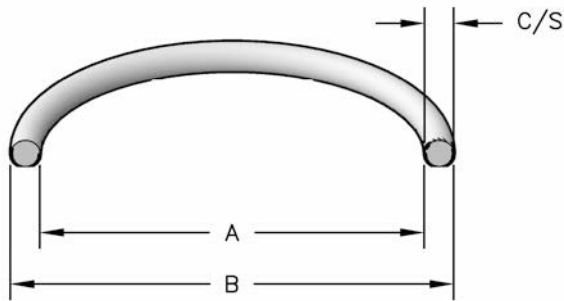

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/32" C/S							
568-001-90D	1/32	3/32	1/32	.029 ±.004	.040 ±.003	50	\$0.22
3/64" C/S							
568-002-90D	3/64	9/64	3/64	.042 ±.004	.050 ±.003	50	\$0.14
1/16" C/S							
568-003-90D	1/16	3/16	1/16	.056 ±.004	.060 ±.003	50	\$0.14
568-004-90D	5/64	13/64	1/16	.070 ±.005	.070 ±.003	50	0.14
568-005-90D	3/32	7/32	1/16	.101 ±.005	.070 ±.003	50	0.10
568-006-90D	1/8	1/4	1/16	.114 ±.005	.070 ±.003	50	0.07
568-007-90D	5/32	9/32	1/16	.145 ±.005	.070 ±.003	50	0.10
568-008-90D	3/16	5/16	1/16	.176 ±.005	.070 ±.003	50	0.10
568-009-90D	7/32	11/32	1/16	.208 ±.005	.070 ±.003	50	0.10
568-010-90D	1/4	3/8	1/16	.239 ±.005	.070 ±.003	50	0.10
568-011-90D	5/16	7/16	1/16	.301 ±.005	.070 ±.003	50	0.10
568-012-90D	3/8	1/2	1/16	.364 ±.005	.070 ±.003	50	0.10
568-013-90D	7/16	9/16	1/16	.426 ±.005	.070 ±.003	50	0.11
568-014-90D	1/2	5/8	1/16	.489 ±.005	.070 ±.003	50	0.11
568-015-90D	9/16	11/16	1/16	.551 ±.007	.070 ±.003	50	0.14
568-016-90D	5/8	3/4	1/16	.614 ±.009	.070 ±.003	50	0.14
568-017-90D	11/16	13/16	1/16	.676 ±.009	.070 ±.003	50	0.16
568-018-90D	3/4	7/8	1/16	.739 ±.009	.070 ±.003	50	0.16
568-019-90D	13/16	15/16	1/16	.801 ±.009	.070 ±.003	50	0.22
568-020-90D	7/8	1	1/16	.864 ±.009	.070 ±.003	50	0.22
568-021-90D	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	50	0.26
568-022-90D	1	1-1/8	1/16	.989 ±.010	.070 ±.003	50	0.26
568-023-90D	1-1/16	1-3/16	1/16	1.051 ±.010	.070 ±.003	50	0.26
568-024-90D	1-1/8	1-1/4	1/16	1.114 ±.010	.070 ±.003	50	0.27
568-025-90D	1-3/16	1-5/16	1/16	1.176 ±.011	.070 ±.003	50	0.29
568-026-90D	1-1/4	1-3/8	1/16	1.239 ±.011	.070 ±.003	50	0.30
568-027-90D	1-5/16	1-7/16	1/16	1.301 ±.011	.070 ±.003	50	0.30
568-028-90D	1-3/8	1-1/2	1/16	1.364 ±.013	.070 ±.003	20	0.30
568-029-90D	1-1/2	1-5/8	1/16	1.489 ±.013	.070 ±.003	20	0.36
568-030-90D	1-5/8	1-3/4	1/16	1.614 ±.013	.070 ±.003	20	0.36
568-031-90D	1-3/4	1-7/8	1/16	1.739 ±.015	.070 ±.003	20	0.47
568-032-90D	1-7/8	2	1/16	1.864 ±.015	.070 ±.003	20	0.50
568-033-90D	2	2-1/8	1/16	1.989 ±.018	.070 ±.003	20	0.66
568-034-90D	2-1/8	2-1/4	1/16	2.114 ±.018	.070 ±.003	20	0.68
568-035-90D	2-1/4	2-3/8	1/16	2.239 ±.018	.070 ±.003	20	0.68
568-036-90D	2-3/8	2-1/2	1/16	2.364 ±.018	.070 ±.003	20	0.73

STYLE 568, 90 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-037-90D	2-1/2	2-5/8	1/16	2.489 ±.018	.070 ±.003	20	0.77
568-038-90D	2-5/8	2-3/4	1/16	2.614 ±.020	.070 ±.003	20	0.79
568-039-90D	2-3/4	2-7/8	1/16	2.739 ±.020	.070 ±.003	20	0.83
568-040-90D	2-7/8	3	1/16	2.864 ±.020	.070 ±.003	20	0.85
568-041-90D	3	3-1/8	1/16	2.989 ±.024	.070 ±.003	20	0.98
568-042-90D	3-1/4	3-3/8	1/16	3.239 ±.024	.070 ±.003	10	1.07
568-043-90D	3-1/2	3-5/8	1/16	3.489 ±.024	.070 ±.003	10	1.15
568-044-90D	3-3/4	3-7/8	1/16	3.739 ±.027	.070 ±.003	10	1.29
568-045-90D	4	4-1/8	1/16	3.989 ±.027	.070 ±.003	10	1.45
568-046-90D	4-1/4	4-3/8	1/16	4.239 ±.030	.070 ±.003	10	1.83
568-047-90D	4-1/2	4-5/8	1/16	4.489 ±.030	.070 ±.003	5	1.90
568-048-90D	4-3/4	4-7/8	1/16	4.739 ±.030	.070 ±.003	5	7.22
568-049-90D	5	5-1/8	1/16	4.989 ±.037	.070 ±.003	5	2.33
568-050-90D	5-1/4	5-3/8	1/16	5.239 ±.037	.070 ±.003	5	2.57
3/32" C/S							
568-102-90D	1/16	1/4	3/32	.049 ±.005	.103 ±.003	50	\$0.16
568-103-90D	3/32	9/32	3/32	.081 ±.005	.103 ±.003	50	0.14
568-104-90D	1/8	5/16	3/32	.112 ±.005	.103 ±.003	50	0.10
568-105-90D	5/32	11/32	3/32	.143 ±.005	.103 ±.003	50	0.11
568-106-90D	3/16	3/8	3/32	.174 ±.005	.103 ±.003	50	0.11
568-107-90D	7/32	13/32	3/32	.206 ±.005	.103 ±.003	50	0.11
568-108-90D	1/4	7/16	3/32	.237 ±.005	.103 ±.003	50	0.11
568-109-90D	5/16	1/2	3/32	.299 ±.005	.103 ±.003	50	0.11
568-110-90D	3/8	9/16	3/32	.362 ±.005	.103 ±.003	50	0.11
568-111-90D	7/16	5/8	3/32	.424 ±.005	.103 ±.003	50	0.11
568-112-90D	1/2	11/16	3/32	.487 ±.005	.103 ±.003	50	0.14
568-113-90D	9/16	3/4	3/32	.549 ±.005	.103 ±.003	50	0.14
568-114-90D	5/8	13/16	3/32	.612 ±.009	.103 ±.003	50	0.14
568-115-90D	11/16	7/8	3/32	.674 ±.009	.103 ±.003	50	0.14
568-116-90D	3/4	15/16	3/32	.737 ±.009	.103 ±.003	50	0.16
568-117-90D	13/16	1	3/32	.799 ±.010	.103 ±.003	50	0.22
568-118-90D	7/8	1-1/16	3/32	.862 ±.010	.103 ±.003	50	0.22
568-119-90D	15/16	1-1/8	3/32	.924 ±.010	.103 ±.003	50	0.26
568-120-90D	1	1-3/16	3/32	.987 ±.010	.103 ±.003	50	0.26
568-121-90D	1-1/16	1-1/4	3/32	1.049 ±.010	.103 ±.003	50	0.27
568-122-90D	1-1/8	1-5/16	3/32	1.112 ±.010	.103 ±.003	50	0.27
568-123-90D	1-3/16	1-3/8	3/32	1.174 ±.012	.103 ±.003	50	0.29
568-124-90D	1-1/4	1-7/16	3/32	1.237 ±.012	.103 ±.003	50	0.30
568-125-90D	1-5/16	1-1/2	3/32	1.299 ±.012	.103 ±.003	50	0.30
568-126-90D	1-3/8	1-9/16	3/32	1.362 ±.012	.103 ±.003	20	0.33
568-127-90D	1-7/16	1-5/8	3/32	1.424 ±.012	.103 ±.003	20	0.34
568-128-90D	1-1/2	1-11/16	3/32	1.487 ±.012	.103 ±.003	20	0.41
568-129-90D	1-9/16	1-3/4	3/32	1.549 ±.015	.103 ±.003	20	0.41
568-130-90D	1-5/8	1-13/16	3/32	1.612 ±.015	.103 ±.003	20	0.47
568-131-90D	1-11/16	1-7/8	3/32	1.674 ±.015	.103 ±.003	20	0.49
568-132-90D	1-3/4	1-15/16	3/32	1.737 ±.015	.103 ±.003	20	0.49
568-133-90D	1-13/16	2	3/32	1.799 ±.015	.103 ±.003	20	0.50
568-134-90D	1-7/8	2-1/16	3/32	1.862 ±.015	.103 ±.003	20	0.55
568-135-90D	1-15/16	2-1/8	3/32	1.925 ±.017	.103 ±.003	20	0.61
568-136-90D	2	2-3/16	3/32	1.987 ±.017	.103 ±.003	20	0.62

STYLE 568, 90 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-137-90D	2-1/16	2-1/4	3/32	2.050 ±.017	.103 ±.003	20	0.62
568-138-90D	2-1/8	2-5/16	3/32	2.112 ±.017	.103 ±.003	20	0.66
568-139-90D	2-3/16	2-3/8	3/32	2.175 ±.017	.103 ±.003	20	0.68
568-140-90D	2-1/4	2-7/16	3/32	2.237 ±.017	.103 ±.003	20	0.68
568-141-90D	2-5/16	2-1/2	3/32	2.300 ±.020	.103 ±.003	20	0.68
568-142-90D	2-3/8	2-9/16	3/32	2.362 ±.020	.103 ±.003	20	0.72
568-143-90D	2-7/16	2-5/8	3/32	2.425 ±.020	.103 ±.003	20	0.77
568-144-90D	2-1/2	2-11/16	3/32	2.487 ±.020	.103 ±.003	20	0.77
568-145-90D	2-9/16	2-3/4	3/32	2.550 ±.020	.103 ±.003	20	0.77
568-146-90D	2-5/8	2-13/16	3/32	2.612 ±.020	.103 ±.003	20	0.80
568-147-90D	2-11/16	2-7/8	3/32	2.675 ±.022	.103 ±.003	20	0.80
568-148-90D	2-3/4	2-15/16	3/32	2.737 ±.022	.103 ±.003	20	0.80
568-149-90D	2-13/16	3	3/32	2.800 ±.022	.103 ±.003	20	0.83
568-150-90D	2-7/8	3-1/16	3/32	2.862 ±.022	.103 ±.003	20	0.92
568-151-90D	3	3-3/16	3/32	2.987 ±.024	.103 ±.003	20	0.94
568-152-90D	3-1/4	3-7/16	3/32	3.237 ±.024	.103 ±.003	10	1.12
568-153-90D	3-1/2	3-11/16	3/32	3.487 ±.024	.103 ±.003	10	1.15
568-154-90D	3-3/4	3-15/16	3/32	3.737 ±.028	.103 ±.003	10	1.38
568-155-90D	4	4-3/16	3/32	3.987 ±.028	.103 ±.003	10	1.67
568-156-90D	4-1/4	4-7/16	3/32	4.237 ±.030	.103 ±.003	10	1.86
568-157-90D	4-1/2	4-11/16	3/32	4.487 ±.030	.103 ±.003	5	2.28
568-158-90D	4-3/4	4-15/16	3/32	4.737 ±.030	.103 ±.003	5	2.28
568-159-90D	5	5-3/16	3/32	4.987 ±.035	.103 ±.003	5	2.67
568-160-90D	5-1/4	5-7/16	3/32	5.237 ±.035	.103 ±.003	5	2.82
568-161-90D	5-1/2	5-11/16	3/32	5.487 ±.035	.103 ±.003	5	3.05
568-162-90D	5-3/4	5-15/16	3/32	5.737 ±.035	.103 ±.003	5	3.14
568-163-90D	6	6-3/16	3/32	5.987 ±.035	.103 ±.003	5	3.31
568-164-90D	6-1/4	6-7/16	3/32	6.237 ±.040	.103 ±.003	5	3.44
568-165-90D	6-1/2	6-11/16	3/32	6.487 ±.040	.103 ±.003	5	3.61
568-166-90D	6-3/4	6-15/16	3/32	6.737 ±.040	.103 ±.003	5	3.82
568-167-90D	7	7-3/16	3/32	6.987 ±.040	.103 ±.003	5	3.96
568-171-90D	8	8-3/16	3/32	7.987 ±.045	.103 ±.003	1	4.69
568-173-90D	8-1/2	8-11/16	3/32	8.487 ±.050	.103 ±.003	1	4.99
568-178-90D	9-3/4	9-15/16	3/32	9.737 ±.055	.103 ±.003	1	5.61
1/8" C/S							
568-201-90D	3/16	7/16	1/8	.171 ±.005	.139 ±.004	50	\$0.14
568-202-90D	1/4	1/2	1/8	.234 ±.005	.139 ±.004	50	0.14
568-203-90D	5/16	9/16	1/8	.296 ±.005	.139 ±.004	50	0.14
568-204-90D	3/8	5/8	1/8	.359 ±.005	.139 ±.004	50	0.14
568-205-90D	7/16	11/16	1/8	.421 ±.005	.139 ±.004	50	0.14
568-206-90D	1/2	3/4	1/8	.484 ±.005	.139 ±.004	50	0.22
568-207-90D	9/16	13/16	1/8	.546 ±.007	.139 ±.004	50	0.22
568-208-90D	5/8	7/8	1/8	.609 ±.009	.139 ±.004	50	0.26
568-209-90D	11/16	15/16	1/8	.671 ±.009	.139 ±.004	50	0.26
568-210-90D	3/4	1	1/8	.734 ±.010	.139 ±.004	50	0.27
568-211-90D	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	50	0.27
568-212-90D	7/8	1-1/8	1/8	.859 ±.010	.139 ±.004	50	0.29
568-213-90D	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	50	0.30
568-214-90D	1	1-1/4	1/8	.984 ±.010	.139 ±.004	50	0.30
568-215-90D	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	50	0.34

STYLE 568, 90 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-216-90D	1-1/8	1-3/8	1/8	1.109 ±.012	.139 ±.004	50	0.34
568-217-90D	1-3/16	1-7/16	1/8	1.171 ±.012	.139 ±.004	50	0.36
568-218-90D	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	20	0.41
568-219-90D	1-5/16	1-9/16	1/8	1.296 ±.012	.139 ±.004	20	0.43
568-220-90D	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	20	0.47
568-221-90D	1-7/16	1-11/16	1/8	1.421 ±.012	.139 ±.004	20	0.47
568-222-90D	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	20	0.53
568-223-90D	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	20	0.61
568-224-90D	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	20	0.64
568-225-90D	1-7/8	2-1/8	1/8	1.859 ±.018	.139 ±.004	20	0.66
568-226-90D	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	20	0.68
568-227-90D	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	20	0.77
568-228-90D	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	20	0.80
568-229-90D	2-3/8	2-5/8	1/8	2.359 ±.020	.139 ±.004	20	0.83
568-230-90D	2-1/2	2-3/4	1/8	2.484 ±.020	.139 ±.004	20	0.88
568-231-90D	2-5/8	2-7/8	1/8	2.609 ±.020	.139 ±.004	20	0.92
568-232-90D	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	10	1.02
568-233-90D	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	10	1.04
568-234-90D	3	3-1/4	1/8	2.984 ±.024	.139 ±.004	10	1.04
568-235-90D	3-1/8	3-3/8	1/8	3.109 ±.024	.139 ±.004	10	1.19
568-236-90D	3-1/4	3-1/2	1/8	3.234 ±.024	.139 ±.004	10	1.22
568-237-90D	3-3/8	3-5/8	1/8	3.359 ±.024	.139 ±.004	10	1.27
568-238-90D	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	10	1.29
568-239-90D	3-5/8	3-7/8	1/8	3.609 ±.028	.139 ±.004	10	1.41
568-240-90D	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	10	1.41
568-241-90D	3-7/8	4-1/8	1/8	3.859 ±.028	.139 ±.004	10	1.45
568-242-90D	4	4-1/4	1/8	3.984 ±.028	.139 ±.004	10	1.50
568-243-90D	4-1/8	4-3/8	1/8	4.109 ±.028	.139 ±.004	10	1.60
568-244-90D	4-1/4	4-1/2	1/8	4.234 ±.030	.139 ±.004	10	1.67
568-245-90D	4-3/8	4-5/8	1/8	4.359 ±.030	.139 ±.004	10	1.86
568-246-90D	4-1/2	4-3/4	1/8	4.484 ±.030	.139 ±.004	5	2.17
568-247-90D	4-5/8	4-7/8	1/8	4.609 ±.030	.139 ±.004	5	2.28
568-248-90D	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	5	2.29
568-249-90D	4-7/8	5-1/8	1/8	4.859 ±.035	.139 ±.004	5	2.29
568-250-90D	5	5-1/4	1/8	4.984 ±.035	.139 ±.004	5	2.40
568-251-90D	5-1/8	5-3/8	1/8	5.109 ±.035	.139 ±.004	5	2.43
568-252-90D	5-1/4	5-1/2	1/8	5.234 ±.035	.139 ±.004	5	2.68
568-253-90D	5-3/8	5-5/8	1/8	5.359 ±.035	.139 ±.004	5	2.82
568-254-90D	5-1/2	5-3/4	1/8	5.484 ±.035	.139 ±.004	5	3.05
568-255-90D	5-5/8	5-7/8	1/8	5.609 ±.035	.139 ±.004	5	3.06
568-256-90D	5-3/4	6	1/8	5.734 ±.035	.139 ±.004	5	3.29
568-257-90D	5-7/8	6-1/8	1/8	5.859 ±.035	.139 ±.004	5	3.78
568-258-90D	6	6-1/4	1/8	5.984 ±.035	.139 ±.004	5	3.82
568-259-90D	6-1/4	6-1/2	1/8	6.234 ±.040	.139 ±.004	5	3.90
568-260-90D	6-1/2	6-3/4	1/8	6.484 ±.040	.139 ±.004	1	4.08
568-261-90D	6-3/4	7	1/8	6.734 ±.040	.139 ±.004	1	4.21
568-262-90D	7	7-1/4	1/8	6.984 ±.040	.139 ±.004	1	4.62
568-263-90D	7-1/4	7-1/2	1/8	7.234 ±.045	.139 ±.004	1	4.99
568-264-90D	7-1/2	7-3/4	1/8	7.484 ±.045	.139 ±.004	1	5.30
568-265-90D	7-3/4	8	1/8	7.734 ±.045	.139 ±.004	1	5.57

STYLE 568, 90 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-266-90D	8	8-1/4	1/8	7.984 ±.045	.139 ±.004	1	5.71
568-267-90D	8-1/4	8-1/2	1/8	8.234 ±.050	.139 ±.004	1	6.45
568-268-90D	8-1/2	8-3/4	1/8	8.484 ±.050	.139 ±.004	1	6.62
568-269-90D	8-3/4	9	1/8	8.734 ±.050	.139 ±.004	1	7.02
568-270-90D	9	9-1/4	1/8	8.984 ±.050	.139 ±.004	1	7.38
568-271-90D	9-1/4	9-1/2	1/8	9.234 ±.055	.139 ±.004	1	7.71
568-272-90D	9-1/2	9-3/4	1/8	9.484 ±.055	.139 ±.004	1	8.01
568-273-90D	9-3/4	10	1/8	9.734 ±.055	.139 ±.004	1	8.25
568-274-90D	10	10-1/4	1/8	9.984 ±.055	.139 ±.004	1	8.52
568-275-90D	10-1/2	10-3/4	1/8	10.484 ±.055	.139 ±.004	1	8.35
568-276-90D	11	11-1/4	1/8	10.984 ±.065	.139 ±.004	1	8.42
568-277-90D	11-1/2	11-3/4	1/8	11.484 ±.065	.139 ±.004	1	8.59
568-278-90D	12	12-1/4	1/8	11.984 ±.065	.139 ±.004	1	8.67
568-279-90D	13	13-1/4	1/8	12.984 ±.065	.139 ±.004	1	8.85
568-280-90D	14	14-1/4	1/8	13.984 ±.065	.139 ±.004	1	8.96
568-281-90D	15	15-1/4	1/8	14.984 ±.065	.139 ±.004	1	9.08
568-282-90D	16	16-1/4	1/8	15.955 ±.075	.139 ±.004	1	9.34
568-283-90D	17	17-1/4	1/8	16.955 ±.080	.139 ±.004	1	21.61
568-284-90D	18	18-1/4	1/8	17.955 ±.085	.139 ±.004	1	9.59
3/16" C/S							
568-310-90D	1/2	7/8	3/16	.475 ±.005	.210 ±.005	50	\$0.33
568-312-90D	5/8	1	3/16	.600 ±.009	.210 ±.005	50	0.36
568-313-90D	11/16	1-1/16	3/16	.662 ±.009	.210 ±.005	20	0.41
568-315-90D	13/16	1-3/16	3/16	.787 ±.010	.210 ±.005	20	0.43
568-316-90D	7/8	1-1/4	3/16	.850 ±.010	.210 ±.005	20	0.47
568-317-90D	15/16	1-5/16	3/16	.912 ±.010	.210 ±.005	20	0.47
568-318-90D	1	1-3/8	3/16	.975 ±.010	.210 ±.005	20	0.49
568-319-90D	1-1/16	1-7/16	3/16	1.037 ±.010	.210 ±.005	20	0.50
568-320-90D	1-1/8	1-1/2	3/16	1.100 ±.012	.210 ±.005	20	0.53
568-321-90D	1-3/16	1-9/16	3/16	1.162 ±.012	.210 ±.005	20	0.62
568-322-90D	1-1/4	1-5/8	3/16	1.225 ±.012	.210 ±.005	20	0.62
568-323-90D	1-5/16	1-11/16	3/16	1.287 ±.012	.210 ±.005	20	0.68
568-324-90D	1-3/8	1-3/4	3/16	1.350 ±.012	.210 ±.005	20	0.68
568-325-90D	1-1/2	1-7/8	3/16	1.475 ±.015	.210 ±.005	20	0.68
568-326-90D	1-5/8	2	3/16	1.600 ±.015	.210 ±.005	20	0.68
568-327-90D	1-3/4	2-1/8	3/16	1.725 ±.015	.210 ±.005	20	0.72
568-328-90D	1-7/8	2-1/4	3/16	1.850 ±.015	.210 ±.005	20	0.77
568-329-90D	2	2-3/8	3/16	1.975 ±.018	.210 ±.005	20	0.92
568-330-90D	2-1/8	2-1/2	3/16	2.100 ±.018	.210 ±.005	20	0.98
568-331-90D	2-1/4	2-5/8	3/16	2.225 ±.018	.210 ±.005	10	1.02
568-332-90D	2-3/8	2-3/4	3/16	2.350 ±.018	.210 ±.005	10	1.11
568-333-90D	2-1/2	2-7/8	3/16	2.475 ±.020	.210 ±.005	10	1.22
568-334-90D	2-5/8	3	3/16	2.600 ±.020	.210 ±.005	10	1.27
568-335-90D	2-3/4	3-1/8	3/16	2.725 ±.020	.210 ±.005	10	1.39
568-336-90D	2-7/8	3-1/4	3/16	2.850 ±.020	.210 ±.005	10	1.45
568-337-90D	3	3-3/8	3/16	2.975 ±.024	.210 ±.005	10	1.50
568-338-90D	3-1/8	3-1/2	3/16	3.100 ±.024	.210 ±.005	10	1.65
568-339-90D	3-1/4	3-5/8	3/16	3.225 ±.024	.210 ±.005	10	1.74
568-340-90D	3-3/8	3-3/4	3/16	3.350 ±.024	.210 ±.005	10	1.79
568-341-90D	3-1/2	3-7/8	3/16	3.475 ±.024	.210 ±.005	10	1.88

STYLE 568, 90 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-342-90D	3-5/8	4	3/16	3.600 ±.028	.210 ±.005	10	1.98
568-343-90D	3-3/4	4-1/8	3/16	3.725 ±.028	.210 ±.005	10	2.00
568-344-90D	3-7/8	4-1/4	3/16	3.850 ±.028	.210 ±.005	5	2.03
568-345-90D	4	4-3/8	3/16	3.975 ±.028	.210 ±.005	5	2.13
568-346-90D	4-1/8	4-1/2	3/16	4.100 ±.028	.210 ±.005	5	2.14
568-347-90D	4-1/4	4-5/8	3/16	4.225 ±.030	.210 ±.005	5	2.32
568-348-90D	4-3/8	4-3/4	3/16	4.350 ±.030	.210 ±.005	5	2.57
568-349-90D	4-1/2	4-7/8	3/16	4.475 ±.030	.210 ±.005	5	2.59
568-350-90D	4-5/8	5	3/16	4.600 ±.030	.210 ±.005	5	2.67
568-351-90D	4-3/4	5-1/8	3/16	4.725 ±.030	.210 ±.005	5	2.82
568-352-90D	4-7/8	5-1/4	3/16	4.850 ±.030	.210 ±.005	5	2.90
568-353-90D	5	5-3/8	3/16	4.975 ±.037	.210 ±.005	5	3.04
568-354-90D	5-1/8	5-1/2	3/16	5.100 ±.037	.210 ±.005	5	3.06
568-355-90D	5-1/4	5-5/8	3/16	5.225 ±.037	.210 ±.005	5	3.32
568-356-90D	5-3/8	5-3/4	3/16	5.350 ±.037	.210 ±.005	5	3.54
568-357-90D	5-1/2	5-7/8	3/16	5.475 ±.037	.210 ±.005	5	3.56
568-358-90D	5-5/8	6	3/16	5.600 ±.037	.210 ±.005	5	3.84
568-359-90D	5-3/4	6-1/8	3/16	5.725 ±.037	.210 ±.005	5	3.89
568-360-90D	5-7/8	6-1/4	3/16	5.850 ±.037	.210 ±.005	5	3.96
568-361-90D	6	6-3/8	3/16	5.975 ±.037	.210 ±.005	1	4.10
568-362-90D	6-1/4	6-5/8	3/16	6.225 ±.040	.210 ±.005	1	4.19
568-363-90D	6-1/2	6-7/8	3/16	6.475 ±.040	.210 ±.005	1	4.34
568-364-90D	6-3/4	7-1/8	3/16	6.725 ±.040	.210 ±.005	1	4.49
568-365-90D	7	7-3/8	3/16	6.975 ±.040	.210 ±.005	1	5.18
568-366-90D	7-1/4	7-5/8	3/16	7.225 ±.045	.210 ±.005	1	5.22
568-367-90D	7-1/2	7-7/8	3/16	7.475 ±.045	.210 ±.005	1	5.24
568-368-90D	7-3/4	8-1/8	3/16	7.725 ±.045	.210 ±.005	1	5.61
568-368.5-90D	7-7/8	8-1/4	3/16	7.850 ±.045	.210 ±.005	1	5.53
568-369-90D	8	8-3/8	3/16	7.975 ±.045	.210 ±.005	1	6.19
568-370-90D	8-1/4	8-5/8	3/16	8.225 ±.050	.210 ±.005	1	6.25
568-371-90D	8-1/2	8-7/8	3/16	8.475 ±.050	.210 ±.005	1	6.34
568-372-90D	8-3/4	9-1/8	3/16	8.725 ±.050	.210 ±.005	1	6.45
568-373-90D	9	9-3/8	3/16	8.975 ±.050	.210 ±.005	1	6.73
568-374-90D	9-1/4	9-5/8	3/16	9.225 ±.055	.210 ±.005	1	6.96
568-375-90D	9-1/2	9-7/8	3/16	9.475 ±.055	.210 ±.005	1	7.18
568-376-90D	9-3/4	10-1/8	3/16	9.725 ±.055	.210 ±.005	1	7.87
568-377-90D	10	10-3/8	3/16	9.975 ±.055	.210 ±.005	1	8.12
568-378-90D	10-1/2	10-7/8	3/16	10.475 ±.060	.210 ±.005	1	8.87
568-379-90D	11	11-3/8	3/16	10.975 ±.060	.210 ±.005	1	9.39
568-380-90D	11-1/2	11-7/8	3/16	11.475 ±.065	.210 ±.005	1	9.51
568-381-90D	12	12-3/8	3/16	11.975 ±.065	.210 ±.005	1	10.00
568-382-90D	13	13-3/8	3/16	12.975 ±.065	.210 ±.005	1	10.23
568-383-90D	14	14-3/8	3/16	13.975 ±.070	.210 ±.005	1	10.55
568-384-90D	15	15-3/8	3/16	14.975 ±.070	.210 ±.005	1	10.66
568-385-90D	16	16-3/8	3/16	15.955 ±.075	.210 ±.005	1	10.96
1/4" C/S							
568-401-90D	1-1/2	2	1/4	1.475 ±.014	.275 ±.006	5	\$1.07
568-402-90D	1-5/8	2-1/8	1/4	1.600 ±.015	.275 ±.006	5	1.14
568-403-90D	1-3/4	2-1/4	1/4	1.725 ±.016	.275 ±.006	5	1.30
568-404-90D	1-7/8	2-3/8	1/4	1.850 ±.016	.275 ±.006	5	1.39

STYLE 568, 90 DURO BUNA-N O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-405-90D	2	2-1/2	1/4	1.975 ±.017	.275 ±.006	5	1.46
568-406-90D	2-1/8	2-5/8	1/4	2.100 ±.018	.275 ±.006	5	1.52
568-407-90D	2-1/4	2-3/4	1/4	2.225 ±.018	.275 ±.006	5	1.52
568-408-90D	2-3/8	2-7/8	1/4	2.350 ±.020	.275 ±.006	5	1.64
568-409-90D	2-1/2	3	1/4	2.475 ±.020	.275 ±.006	5	1.80
568-410-90D	2-5/8	3-1/8	1/4	2.600 ±.020	.275 ±.006	5	1.84
568-411-90D	2-3/4	3-1/4	1/4	2.725 ±.022	.275 ±.006	5	1.90
568-412-90D	2-7/8	3-3/8	1/4	2.850 ±.022	.275 ±.006	5	2.00
568-413-90D	3	3-1/2	1/4	2.975 ±.024	.275 ±.006	5	2.03
568-414-90D	3-1/8	3-5/8	1/4	3.100 ±.024	.275 ±.006	5	2.18
568-415-90D	3-1/4	3-3/4	1/4	3.225 ±.024	.275 ±.006	5	2.28
568-416-90D	3-3/8	3-7/8	1/4	3.350 ±.026	.275 ±.006	5	2.33
568-417-90D	3-1/2	4	1/4	3.475 ±.026	.275 ±.006	5	2.40
568-418-90D	3-5/8	4-1/8	1/4	3.600 ±.026	.275 ±.006	5	2.48
568-419-90D	3-3/4	4-1/4	1/4	3.725 ±.028	.275 ±.006	5	2.53
568-420-90D	3-7/8	4-3/8	1/4	3.850 ±.028	.275 ±.006	5	2.91
568-421-90D	4	4-1/2	1/4	3.975 ±.028	.275 ±.006	5	2.97
568-422-90D	4-1/8	4-5/8	1/4	4.100 ±.030	.275 ±.006	5	3.05
568-423-90D	4-1/4	4-3/4	1/4	4.225 ±.030	.275 ±.006	5	3.09
568-424-90D	4-3/8	4-7/8	1/4	4.350 ±.030	.275 ±.006	5	3.12
568-425-90D	4-1/2	5	1/4	4.475 ±.033	.275 ±.006	5	3.13
568-426-90D	4-5/8	5-1/8	1/4	4.600 ±.033	.275 ±.006	5	3.20
568-427-90D	4-3/4	5-1/4	1/4	4.725 ±.033	.275 ±.006	5	3.28
568-428-90D	4-7/8	5-3/8	1/4	4.850 ±.033	.275 ±.006	5	3.39
568-429-90D	5	5-1/2	1/4	4.975 ±.037	.275 ±.006	5	3.44
568-430-90D	5-1/8	5-5/8	1/4	5.100 ±.037	.275 ±.006	5	3.55
568-431-90D	5-1/4	5-3/4	1/4	5.225 ±.037	.275 ±.006	5	3.56
568-432-90D	5-3/8	5-7/8	1/4	5.350 ±.037	.275 ±.006	5	3.82
568-433-90D	5-1/2	6	1/4	5.475 ±.037	.275 ±.006	5	3.86
568-434-90D	5-5/8	6-1/8	1/4	5.600 ±.037	.275 ±.006	5	3.96
568-435-90D	5-3/4	6-1/4	1/4	5.725 ±.037	.275 ±.006	1	4.02
568-436-90D	5-7/8	6-3/8	1/4	5.850 ±.037	.275 ±.006	1	4.16
568-437-90D	6	6-1/2	1/4	5.975 ±.037	.275 ±.006	1	4.59
568-438-90D	6-1/4	6-3/4	1/4	6.225 ±.040	.275 ±.006	1	4.69
568-439-90D	6-1/2	7	1/4	6.475 ±.040	.275 ±.006	1	4.92
568-440-90D	6-3/4	7-1/4	1/4	6.725 ±.040	.275 ±.006	1	4.96
568-441-90D	7	7-1/2	1/4	6.975 ±.040	.275 ±.006	1	5.41
568-442-90D	7-1/4	7-3/4	1/4	7.225 ±.045	.275 ±.006	1	5.71
568-443-90D	7-1/2	8	1/4	7.475 ±.045	.275 ±.006	1	6.08
568-444-90D	7-3/4	8-1/4	1/4	7.725 ±.045	.275 ±.006	1	6.32
568-445-90D	8	8-1/2	1/4	7.975 ±.045	.275 ±.006	1	6.62
568-446-90D	8-1/2	9	1/4	8.475 ±.055	.275 ±.006	1	6.91
568-447-90D	9	9-1/2	1/4	8.975 ±.055	.275 ±.006	1	7.07
568-448-90D	9-1/2	10	1/4	9.475 ±.055	.275 ±.006	1	7.25
568-449-90D	10	10-1/2	1/4	9.975 ±.055	.275 ±.006	1	8.37
568-450-90D	10-1/2	11	1/4	10.475 ±.060	.275 ±.006	1	10.18
568-451-90D	11	11-1/2	1/4	10.975 ±.060	.275 ±.006	1	10.93
568-452-90D	11-1/2	12	1/4	11.475 ±.060	.275 ±.006	1	14.31
568-453-90D	12	12-1/2	1/4	11.975 ±.060	.275 ±.006	1	14.82
568-454-90D	12-1/2	13	1/4	12.475 ±.060	.275 ±.006	1	20.05

STYLE 568, 90 DURO BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-455-90D	13	13-1/2	1/4	12.975 ±.060	.275 ±.006	1	15.56
568-456-90D	13-1/2	14	1/4	13.475 ±.070	.275 ±.006	1	15.24
568-457-90D	14	14-1/2	1/4	13.975 ±.070	.275 ±.006	1	15.50
568-458-90D	14-1/2	15	1/4	14.475 ±.070	.275 ±.006	1	15.77
568-459-90D	15	15-1/2	1/4	14.975 ±.070	.275 ±.006	1	15.91
568-460-90D	15-1/2	16	1/4	15.475 ±.070	.275 ±.006	1	16.30
568-461-90D	16	16-1/2	1/4	15.955 ±.075	.275 ±.006	1	18.68
568-462-90D	16-1/2	17	1/4	16.455 ±.075	.275 ±.006	1	18.90
568-463-90D	17	17-1/2	1/4	16.955 ±.080	.275 ±.006	1	19.20
568-464-90D	17-1/2	18	1/4	17.455 ±.085	.275 ±.006	1	19.46
568-466-90D	18-1/2	19	1/4	18.455 ±.085	.275 ±.006	1	21.08
568-468-90D	19-1/2	20	1/4	19.455 ±.090	.275 ±.006	1	22.79
568-469-90D	20	20-1/2	1/4	19.955 ±.090	.275 ±.006	1	23.62
568-471-90D	22	22-1/2	1/4	21.955 ±.100	.275 ±.006	1	26.23
568-472-90D	23	23-1/2	1/4	22.940 ±.105	.275 ±.006	1	32.10
568-473-90D	24	24-1/2	1/4	23.940 ±.110	.275 ±.006	1	34.55

STYLE 568, 90 DURO BUNA-N O-RING BOSS GASKETS FOR STRAIGHT THREAD FITTINGS



AS-568A UNIVERSAL SERIES DASH NO.	TUBE SIZE (OD) INCHES	ACTUAL SIZE	
		ID	W.
-901	3/32	.185 ±.005	.056 ±.003
-902	1/8	.239 ±.005	.064 ±.003
-903	3/16	.301 ±.005	.064 ±.003
-904	1/4	.351 ±.005	.072 ±.003
-905	5/16	.414 ±.005	.072 ±.003
-906	3/8	.468 ±.005	.078 ±.003
-907	7/16	.530 ±.005	.082 ±.003
-908	1/2	.644 ±.009	.087 ±.003
-909	9/16	.706 ±.009	.097 ±.003
-910	5/8	.755 ±.009	.097 ±.003
-911	11/16	.863 ±.009	.116 ±.004
-912	3/4	.924 ±.009	.116 ±.004
-913	13/16	.986 ±.010	.116 ±.004
-914	7/8	1.047 ±.010	.116 ±.004
-916	1	1.171 ±.010	.116 ±.004
-918	1-1/8	1.355 ±.012	.116 ±.004
-920	1-1/4	1.475 ±.012	.118 ±.004
-924	1-1/2	1.720 ±.014	.118 ±.004
-928	1-3/4	2.090 ±.018	.118 ±.004
-932	2	2.337 ±.018	.118 ±.004


SEAL INFORMATION	
MATERIAL	90 DUROMETER BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PART NUMBER	(Prefix) - (Dash No.)

Part Number	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-901	.185 ±.005	.056 ±.003	50	\$0.16
568-902	.239 ±.005	.064 ±.003	50	0.16
568-903	.301 ±.005	.064 ±.003	50	0.16
568-903-70D	.301 ±.005	.064 ±.003	29	0.08
568-904	.351 ±.005	.072 ±.003	50	0.22
568-905	.414 ±.005	.072 ±.003	50	0.22
568-906	.468 ±.005	.078 ±.003	50	0.22
568-907	.530 ±.005	.082 ±.003	50	0.22
568-908	.644 ±.009	.087 ±.003	50	0.25
568-909	.706 ±.009	.097 ±.003	50	0.25
568-910	.755 ±.009	.097 ±.003	50	0.26

STYLE 568, 90 DURO BUNA-N O-RING BOSS GASKETS FOR STRAIGHT THREAD FITTINGS

Part Number	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-911	.863 ±.009	.116 ±.004	50	0.28
568-911-70D	.863 ±.009	.116 ±.004	20	0.16
568-912	.924 ±.009	.116 ±.004	50	0.32
568-913	.986 ±.010	.116 ±.004	20	0.34
568-914	1.047 ±.010	.116 ±.004	20	0.38
568-916	1.171 ±.010	.116 ±.004	20	0.42
568-918	1.355 ±.012	.116 ±.004	20	0.48
568-918-70D	1.355 ±.012	.116 ±.004	10	0.32
568-920	1.475 ±.012	.118 ±.004	20	0.53
568-924	1.720 ±.014	.118 ±.004	10	0.77
568-928	2.090 ±.018	.118 ±.004	10	0.93
568-928-70D	2.090 ±.018	.118 ±.004	9	0.57
568-932	2.337 ±.018	.118 ±.004	10	1.01
568-932-70D	2.337 ±.018	.118 ±.004	8	0.60

STYLE 568, 50 & 60 DURO BUNA-N O-RINGS

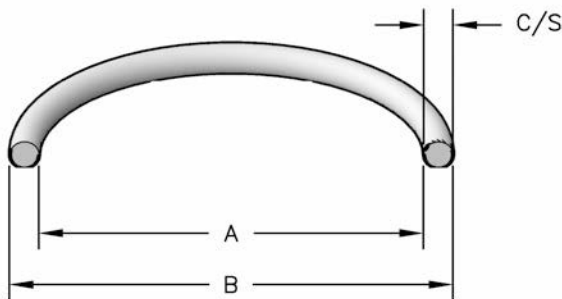

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRICAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (90 Duro.)


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
3/16" C/S							
568-335-60D	2-3/4	3-1/8	3/16	2.725 ±.020	.210 ±.005	8	\$1.47
568-336-50D	2-7/8	3-1/4	3/16	2.850 ±.020	.210 ±.005	10	1.18
568-341-60D	3-1/2	3-7/8	3/16	3.475 ±.024	.210 ±.005	8	1.58
568-348-60D	4-3/8	4-3/4	3/16	4.350 ±.030	.210 ±.005	5	2.06

Seal color may vary. Special order sizes are available.

STYLE 568, 70 DURO HNBR O-RINGS



Hydrogenated Nitrile Rubber (HNBR), also known as Highly Saturated Nitrile (HSN), is a compound with superior heat, ozone, chemical resistance, tensile strength and abrasion resistance over natural rubber. HNBR provides excellent service life in most sealing applications such as oilfield, automotive and refrigerants.

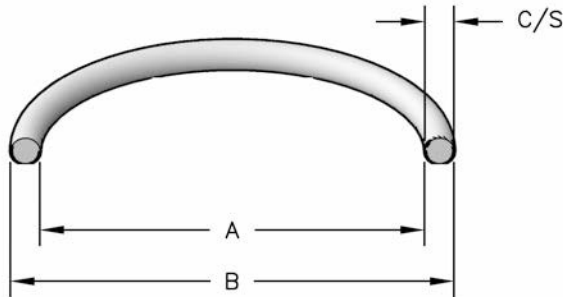

SEAL INFORMATION	
MATERIAL	HIGHLY SATURATED NITRILE
TEMPERATURE RANGE	-40° TO +300° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S								
568-004H	5/64	13/64	1/16	-004	.070 ±.005	.070 ±.003	50	\$0.04
568-005H	3/32	7/32	1/16	-005	.101 ±.005	.070 ±.003	50	0.04
568-006H	1/8	1/4	1/16	-006	.114 ±.005	.070 ±.003	50	0.04
568-007H	5/32	9/32	1/16	-007	.145 ±.005	.070 ±.003	50	0.05
568-008H	3/16	5/16	1/16	-008	.176 ±.005	.070 ±.003	50	0.05
568-009H	7/32	11/32	1/16	-009	.208 ±.005	.070 ±.003	50	0.05
568-010H	1/4	3/8	1/16	-010	.239 ±.005	.070 ±.003	50	0.06
568-011H	5/16	7/16	1/16	-011	.301 ±.005	.070 ±.003	50	0.07
568-012H	3/8	1/2	1/16	-012	.364 ±.005	.070 ±.003	50	0.08
568-013H	7/16	9/16	1/16	-013	.426 ±.005	.070 ±.003	50	0.08
568-014H	1/2	5/8	1/16	-014	.489 ±.005	.070 ±.003	50	0.09
568-015H	9/16	11/16	1/16	-015	.551 ±.007	.070 ±.003	50	0.11
568-016H	5/8	3/4	1/16	-016	.614 ±.009	.070 ±.003	50	0.12
568-017H	11/16	13/16	1/16	-017	.676 ±.009	.070 ±.003	50	0.13
568-018H	3/4	7/8	1/16	-018	.739 ±.009	.070 ±.003	50	0.16
568-019H	13/16	15/16	1/16	-019	.801 ±.009	.070 ±.003	50	0.17
568-020H	7/8	1	1/16	-020	.864 ±.009	.070 ±.003	50	0.19
568-021H	15/16	1-1/16	1/16	-021	.926 ±.009	.070 ±.003	50	0.21
568-022H	1	1-1/8	1/16	-022	.989 ±.010	.070 ±.003	50	0.22
568-023H	1-1/16	1-3/16	1/16	-023	1.051 ±.010	.070 ±.003	50	0.23
568-024H	1-1/8	1-1/4	1/16	-024	1.114 ±.010	.070 ±.003	50	0.26
568-025H	1-3/16	1-5/16	1/16	-025	1.176 ±.011	.070 ±.003	50	0.30
568-026H	1-1/4	1-3/8	1/16	-026	1.239 ±.011	.070 ±.003	50	0.30
568-027H	1-5/16	1-7/16	1/16	-027	1.301 ±.011	.070 ±.003	50	0.30
568-028H	1-3/8	1-1/2	1/16	-028	1.364 ±.013	.070 ±.003	20	0.34
568-031H	1-3/4	1-7/8	1/16	-031	1.739 ±.015	.070 ±.003	20	0.41
568-033H	2	2-1/8	1/16	-033	1.989 ±.018	.070 ±.003	10	0.60
568-037H	2-1/2	2-5/8	1/16	-037	2.489 ±.018	.070 ±.003	10	0.70
568-046H	4-1/4	4-3/8	1/16	-046	4.239 ±.030	.070 ±.003	5	1.34
3/32" C/S								
568-106H	3/16	3/8	3/32	-106	.174 ±.005	.103 ±.003	50	\$0.08
568-108H	1/4	7/16	3/32	-108	.237 ±.005	.103 ±.003	50	0.11
568-109H	5/16	1/2	3/32	-109	.299 ±.005	.103 ±.003	50	0.11

STYLE 568, 70 DURO HNBR O-RINGS


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-110H	3/8	9/16	3/32	-110	.362 ±.005	.103 ±.003	50	0.13
568-111H	7/16	5/8	3/32	-111	.424 ±.005	.103 ±.003	50	0.16
568-112H	1/2	11/16	3/32	-112	.487 ±.005	.103 ±.003	50	0.17
568-113H	9/16	3/4	3/32	-113	.549 ±.005	.103 ±.003	50	0.20
568-114H	5/8	13/16	3/32	-114	.612 ±.009	.103 ±.003	50	0.20
568-115H	11/16	7/8	3/32	-115	.674 ±.009	.103 ±.003	25	0.22
568-116H	3/4	15/16	3/32	-116	.737 ±.009	.103 ±.003	25	0.25
568-117H	13/16	1	3/32	-117	.799 ±.010	.103 ±.003	25	0.26
568-118H	7/8	1-1/16	3/32	-118	.862 ±.010	.103 ±.003	25	0.28
568-119H	15/16	1-1/8	3/32	-119	.924 ±.010	.103 ±.003	25	0.30
568-120H	1	1-3/16	3/32	-120	.987 ±.010	.103 ±.003	25	0.30
568-121H	1-1/16	1-1/4	3/32	-121	1.049 ±.010	.103 ±.003	25	0.34
568-123H	1-3/16	1-3/8	3/32	-123	1.174 ±.012	.103 ±.003	25	0.39
568-124H	1-1/4	1-7/16	3/32	-124	1.237 ±.012	.103 ±.003	25	0.41
568-125H	1-5/16	1-1/2	3/32	-125	1.299 ±.012	.103 ±.003	20	0.46
568-126H	1-3/8	1-9/16	3/32	-126	1.362 ±.012	.103 ±.003	20	0.48
568-127H	1-7/16	1-5/8	3/32	-127	1.424 ±.012	.103 ±.003	20	0.53
568-128H	1-1/2	1-11/16	3/32	-128	1.487 ±.012	.103 ±.003	20	0.53
568-129H	1-9/16	1-3/4	3/32	-129	1.549 ±.015	.103 ±.003	20	0.54
568-131H	1-11/16	1-7/8	3/32	-131	1.674 ±.015	.103 ±.003	15	0.58
568-132H	1-3/4	1-15/16	3/32	-132	1.737 ±.015	.103 ±.003	15	0.59
568-136H	2	2-3/16	3/32	-136	1.987 ±.017	.103 ±.003	10	0.78
568-137H	2-1/16	2-1/4	3/32	-137	2.050 ±.017	.103 ±.003	10	0.78
568-138H	2-1/8	2-5/16	3/32	-138	2.112 ±.017	.103 ±.003	10	0.83
568-141H	2-5/16	2-1/2	3/32	-141	2.300 ±.020	.103 ±.003	10	0.91
568-144H	2-1/2	2-11/16	3/32	-144	2.487 ±.020	.103 ±.003	10	1.09
568-146H	2-5/8	2-13/16	3/32	-146	2.612 ±.020	.103 ±.003	10	1.00
568-151H	3	3-3/16	3/32	-151	2.987 ±.024	.103 ±.003	5	1.31
568-155H	4	4-3/16	3/32	-155	3.987 ±.028	.103 ±.003	5	1.74
568-159H	5	5-3/16	3/32	-159	4.987 ±.035	.103 ±.003	3	2.43
568-165H	6-1/2	6-11/16	3/32	-165	6.487 ±.040	.103 ±.003	3	2.72
1/8" C/S								
568-204H	3/8	5/8	1/8	-204	.359 ±.005	.139 ±.004	25	\$0.25
568-209H	11/16	15/16	1/8	-209	.671 ±.009	.139 ±.004	25	0.41
568-210H	3/4	1	1/8	-210	.734 ±.010	.139 ±.004	25	0.45
568-211H	13/16	1-1/16	1/8	-211	.796 ±.010	.139 ±.004	25	0.45
568-212H	7/8	1-1/8	1/8	-212	.859 ±.010	.139 ±.004	25	0.48
568-213H	15/16	1-3/16	1/8	-213	.921 ±.010	.139 ±.004	25	0.53
568-214H	1	1-1/4	1/8	-214	.984 ±.010	.139 ±.004	25	0.54
568-215H	1-1/16	1-5/16	1/8	-215	1.046 ±.010	.139 ±.004	15	0.55
568-216H	1-1/8	1-3/8	1/8	-216	1.109 ±.012	.139 ±.004	15	0.59
568-217H	1-3/16	1-7/16	1/8	-217	1.171 ±.012	.139 ±.004	15	0.61
568-218H	1-1/4	1-1/2	1/8	-218	1.234 ±.012	.139 ±.004	15	0.68
568-219H	1-5/16	1-9/16	1/8	-219	1.296 ±.012	.139 ±.004	15	0.71
568-220H	1-3/8	1-5/8	1/8	-220	1.359 ±.012	.139 ±.004	15	0.75
568-221H	1-7/16	1-11/16	1/8	-221	1.421 ±.012	.139 ±.004	15	0.77
568-222H	1-1/2	1-3/4	1/8	-222	1.484 ±.015	.139 ±.004	10	0.80
568-223H	1-5/8	1-7/8	1/8	-223	1.609 ±.015	.139 ±.004	10	0.87
568-224H	1-3/4	2	1/8	-224	1.734 ±.015	.139 ±.004	10	0.91
568-225H	1-7/8	2-1/8	1/8	-225	1.859 ±.018	.139 ±.004	10	1.01

STYLE 568, 70 DURO HNBR O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-226H	2	2-1/4	1/8	-226	1.984 ±.018	.139 ±.004	10	1.11
568-227H	2-1/8	2-3/8	1/8	-227	2.109 ±.018	.139 ±.004	10	1.18
568-228H	2-1/4	2-1/2	1/8	-228	2.234 ±.020	.139 ±.004	10	1.45
568-229H	2-3/8	2-5/8	1/8	-229	2.359 ±.020	.139 ±.004	10	1.30
568-230H	2-1/2	2-3/4	1/8	-230	2.484 ±.020	.139 ±.004	10	1.44
568-231H	2-5/8	2-7/8	1/8	-231	2.609 ±.020	.139 ±.004	5	1.48
568-232H	2-3/4	3	1/8	-232	2.734 ±.024	.139 ±.004	5	1.65
568-234H	3	3-1/4	1/8	-234	2.984 ±.024	.139 ±.004	5	1.65
568-236H	3-1/4	3-1/2	1/8	-236	3.234 ±.024	.139 ±.004	5	1.69
568-237H	3-3/8	3-5/8	1/8	-237	3.359 ±.024	.139 ±.004	5	1.72
568-238H	3-1/2	3-3/4	1/8	-238	3.484 ±.024	.139 ±.004	5	1.94
568-239H	3-5/8	3-7/8	1/8	-239	3.609 ±.028	.139 ±.004	5	1.98
568-240H	3-3/4	4	1/8	-240	3.734 ±.028	.139 ±.004	5	2.02
568-242H	4	4-1/4	1/8	-242	3.984 ±.028	.139 ±.004	5	2.11
568-244H	4-1/4	4-1/2	1/8	-244	4.234 ±.030	.139 ±.004	5	2.32
568-245H	4-3/8	4-5/8	1/8	-245	4.359 ±.030	.139 ±.004	5	2.66
568-246H	4-1/2	4-3/4	1/8	-246	4.484 ±.030	.139 ±.004	3	2.76
568-247H	4-5/8	4-7/8	1/8	-247	4.609 ±.030	.139 ±.004	3	2.87
568-248H	4-3/4	5	1/8	-248	4.734 ±.030	.139 ±.004	3	2.92
568-249H	4-7/8	5-1/8	1/8	-249	4.859 ±.035	.139 ±.004	3	3.08
568-251H	5-1/8	5-3/8	1/8	-251	5.109 ±.035	.139 ±.004	3	3.14
568-254H	5-1/2	5-3/4	1/8	-254	5.484 ±.035	.139 ±.004	3	3.23
568-255H	5-5/8	5-7/8	1/8	-255	5.609 ±.035	.139 ±.004	3	3.26
568-256H	5-3/4	6	1/8	-256	5.734 ±.035	.139 ±.004	3	3.35
568-258H	6	6-1/4	1/8	-258	5.984 ±.035	.139 ±.004	3	3.55
3/16" C/S								
568-322H	1-1/4	1-5/8	3/16	-322	1.225 ±.012	.210 ±.005	10	\$1.40
568-328H	1-7/8	2-1/4	3/16	-328	1.850 ±.015	.210 ±.005	5	2.08
568-331H	2-1/4	2-5/8	3/16	-331	2.225 ±.018	.210 ±.005	5	2.41
568-333H	2-1/2	2-7/8	3/16	-333	2.475 ±.020	.210 ±.005	5	2.63
568-338H	3-1/8	3-1/2	3/16	-338	3.100 ±.024	.210 ±.005	3	3.24
568-340H	3-3/8	3-3/4	3/16	-340	3.350 ±.024	.210 ±.005	3	3.56
568-343H	3-3/4	4-1/8	3/16	-343	3.725 ±.028	.210 ±.005	3	3.87
568-346H	4-1/8	4-1/2	3/16	-346	4.100 ±.028	.210 ±.005	2	4.45
568-348H	4-3/8	4-3/4	3/16	-348	4.350 ±.030	.210 ±.005	2	4.69
568-350H	4-5/8	5	3/16	-350	4.600 ±.030	.210 ±.005	2	4.93
568-353H	5	5-3/8	3/16	-353	4.975 ±.037	.210 ±.005	2	5.29
568-356H	5-3/8	5-3/4	3/16	-356	5.350 ±.037	.210 ±.005	2	5.64
568-363H	6-1/2	6-7/8	3/16	-363	6.475 ±.040	.210 ±.005	1	7.48
1/4" C/S								
568-439H	6-1/2	7	1/4	-439	6.475 ±.040	.275 ±.006	1	\$11.12

STYLE 568, 75 DURO FLUOROCARBON O-RINGS

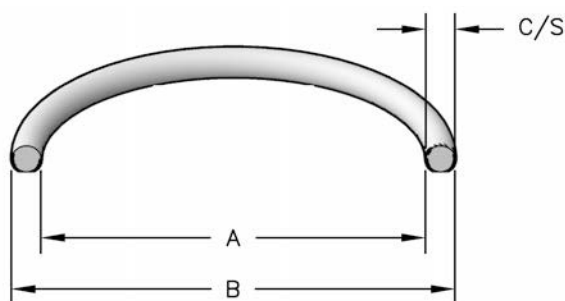

SEAL INFORMATION	
MATERIAL	BROWN FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix)-(Dash No.)-(Fluorocarbon)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/32" C/S							
568-001V	1/32	3/32	1/32	.029 ±.004	.040 ±.003	56	\$0.36
3/64" C/S							
568-002V	3/64	9/64	3/64	.042 ±.004	.050 ±.003	50	\$0.36
1/16" C/S							
568-003V	1/16	3/16	1/16	.056 ±.004	.060 ±.003	14	\$0.36
568-004V	5/64	13/64	1/16	.070 ±.005	.070 ±.003	14	0.36
568-005V	3/32	7/32	1/16	.101 ±.005	.070 ±.003	9	0.36
568-006V	1/8	1/4	1/16	.114 ±.005	.070 ±.003	40	0.36
568-007V	5/32	9/32	1/16	.145 ±.005	.070 ±.003	40	0.36
568-008V	3/16	5/16	1/16	.176 ±.005	.070 ±.003	40	0.36
568-009V	7/32	11/32	1/16	.208 ±.005	.070 ±.003	30	0.36
568-010V	1/4	3/8	1/16	.239 ±.005	.070 ±.003	30	0.36
568-011V	5/16	7/16	1/16	.301 ±.005	.070 ±.003	30	0.36
568-012V	3/8	1/2	1/16	.364 ±.005	.070 ±.003	20	0.38
568-013V	7/16	9/16	1/16	.426 ±.005	.070 ±.003	20	0.41
568-014V	1/2	5/8	1/16	.489 ±.005	.070 ±.003	20	0.41
568-015V	9/16	11/16	1/16	.551 ±.007	.070 ±.003	20	0.48
568-016V	5/8	3/4	1/16	.614 ±.009	.070 ±.003	20	0.48
568-017V	11/16	13/16	1/16	.676 ±.009	.070 ±.003	15	0.48
568-018V	3/4	7/8	1/16	.739 ±.009	.070 ±.003	15	0.48
568-019V	13/16	15/16	1/16	.801 ±.009	.070 ±.003	15	0.53
568-020V	7/8	1	1/16	.864 ±.009	.070 ±.003	15	0.57
568-021V	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	15	0.60
568-022V	1	1-1/8	1/16	.989 ±.010	.070 ±.003	15	0.66
568-023V	1-1/16	1-3/16	1/16	1.051 ±.010	.070 ±.003	15	0.66
568-024V	1-1/8	1-1/4	1/16	1.114 ±.010	.070 ±.003	15	0.81
568-025V	1-3/16	1-5/16	1/16	1.176 ±.011	.070 ±.003	8	0.81
568-026V	1-1/4	1-3/8	1/16	1.239 ±.011	.070 ±.003	10	0.88
568-027V	1-5/16	1-7/16	1/16	1.301 ±.011	.070 ±.003	10	0.90
568-028V	1-3/8	1-1/2	1/16	1.364 ±.013	.070 ±.003	10	1.01
568-029V	1-1/2	1-5/8	1/16	1.489 ±.013	.070 ±.003	10	1.15
568-030V	1-5/8	1-3/4	1/16	1.614 ±.013	.070 ±.003	5	1.22
568-031V	1-3/4	1-7/8	1/16	1.739 ±.015	.070 ±.003	5	1.39
568-032V	1-7/8	2	1/16	1.864 ±.015	.070 ±.003	5	1.64
568-033V	2	2-1/8	1/16	1.989 ±.018	.070 ±.003	5	1.77
568-034V	2-1/8	2-1/4	1/16	2.114 ±.018	.070 ±.003	3	1.77

STYLE 568, 75 DURO FLUOROCARBON O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-035V	2-1/4	2-3/8	1/16	2.239 ±018	.070 ±003	3	1.81
568-036V	2-3/8	2-1/2	1/16	2.364 ±018	.070 ±003	3	2.09
568-037V	2-1/2	2-5/8	1/16	2.489 ±018	.070 ±003	3	2.12
568-038V	2-5/8	2-3/4	1/16	2.614 ±020	.070 ±003	3	2.19
568-039V	2-3/4	2-7/8	1/16	2.739 ±020	.070 ±003	3	2.33
568-040V	2-7/8	3	1/16	2.864 ±020	.070 ±003	3	2.40
568-041V	3	3-1/8	1/16	2.989 ±024	.070 ±003	3	2.76
568-042V	3-1/4	3-3/8	1/16	3.239 ±024	.070 ±003	3	3.24
568-043V	3-1/2	3-5/8	1/16	3.489 ±024	.070 ±003	3	3.50
568-044V	3-3/4	3-7/8	1/16	3.739 ±027	.070 ±003	3	3.74
568-045V	4	4-1/8	1/16	3.989 ±027	.070 ±003	2	4.08
568-046V	4-1/4	4-3/8	1/16	4.239 ±030	.070 ±003	2	4.26
568-047V	4-1/2	4-5/8	1/16	4.489 ±030	.070 ±003	2	4.75
568-048V	4-3/4	4-7/8	1/16	4.739 ±030	.070 ±003	2	4.93
568-049V	5	5-1/8	1/16	4.989 ±037	.070 ±003	2	6.43
568-050V	5-1/4	5-3/8	1/16	5.239 ±037	.070 ±003	1	6.88
3/32" C/S							
568-102V	1/16	1/4	3/32	.049 ±005	.103 ±003	50	\$0.43
568-104V	1/8	5/16	3/32	.112 ±005	.103 ±003	15	0.46
568-105V	5/32	11/32	3/32	.143 ±005	.103 ±003	27	0.48
568-106V	3/16	3/8	3/32	.174 ±005	.103 ±003	15	0.46
568-107V	7/32	13/32	3/32	.206 ±005	.103 ±003	15	0.46
568-108V	1/4	7/16	3/32	.237 ±005	.103 ±003	15	0.48
568-109V	5/16	1/2	3/32	.299 ±005	.103 ±003	15	0.51
568-110V	3/8	9/16	3/32	.362 ±005	.103 ±003	15	0.53
568-111V	7/16	5/8	3/32	.424 ±005	.103 ±003	15	0.57
568-112V	1/2	11/16	3/32	.487 ±005	.103 ±003	15	0.66
568-113V	9/16	3/4	3/32	.549 ±005	.103 ±003	15	0.66
568-114V	5/8	13/16	3/32	.612 ±009	.103 ±003	15	0.66
568-115V	11/16	7/8	3/32	.674 ±009	.103 ±003	10	0.77
568-116V	3/4	15/16	3/32	.737 ±009	.103 ±003	10	0.81
568-117V	13/16	1	3/32	.799 ±010	.103 ±003	10	0.86
568-118V	7/8	1-1/16	3/32	.862 ±010	.103 ±003	10	0.88
568-119V	15/16	1-1/8	3/32	.924 ±010	.103 ±003	10	0.95
568-120V	1	1-3/16	3/32	.987 ±010	.103 ±003	10	1.01
568-121V	1-1/16	1-1/4	3/32	1.049 ±010	.103 ±003	10	1.12
568-122V	1-1/8	1-5/16	3/32	1.112 ±010	.103 ±003	10	1.22
568-123V	1-3/16	1-3/8	3/32	1.174 ±012	.103 ±003	10	1.29
568-124V	1-1/4	1-7/16	3/32	1.237 ±012	.103 ±003	10	1.29
568-125V	1-5/16	1-1/2	3/32	1.299 ±012	.103 ±003	5	1.36
568-126V	1-3/8	1-9/16	3/32	1.362 ±012	.103 ±003	5	1.43
568-127V	1-7/16	1-5/8	3/32	1.424 ±012	.103 ±003	5	1.47
568-128V	1-1/2	1-11/16	3/32	1.487 ±012	.103 ±003	5	1.55
568-129V	1-9/16	1-3/4	3/32	1.549 ±015	.103 ±003	5	1.65
568-130V	1-5/8	1-13/16	3/32	1.612 ±015	.103 ±003	5	1.74
568-131V	1-11/16	1-7/8	3/32	1.674 ±015	.103 ±003	3	1.74
568-132V	1-3/4	1-15/16	3/32	1.737 ±015	.103 ±003	4	1.79
568-133V	1-13/16	2	3/32	1.799 ±015	.103 ±003	4	1.88
568-134V	1-7/8	2-1/16	3/32	1.862 ±015	.103 ±003	3	1.88
568-135V	1-15/16	2-1/8	3/32	1.925 ±017	.103 ±003	3	1.96

STYLE 568, 75 DURO FLUOROCARBON O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-136V	2	2-3/16	3/32	1.987 ±.017	.103 ±.003	3	2.10
568-137V	2-1/16	2-1/4	3/32	2.050 ±.017	.103 ±.003	4	2.14
568-138V	2-1/8	2-5/16	3/32	2.112 ±.017	.103 ±.003	3	2.24
568-139V	2-3/16	2-3/8	3/32	2.175 ±.017	.103 ±.003	2	2.31
568-140V	2-1/4	2-7/16	3/32	2.237 ±.017	.103 ±.003	2	2.38
568-141V	2-5/16	2-1/2	3/32	2.300 ±.020	.103 ±.003	3	2.44
568-142V	2-3/8	2-9/16	3/32	2.362 ±.020	.103 ±.003	3	2.44
568-143V	2-7/16	2-5/8	3/32	2.425 ±.020	.103 ±.003	2	2.56
568-144V	2-1/2	2-11/16	3/32	2.487 ±.020	.103 ±.003	3	2.56
568-145V	2-9/16	2-3/4	3/32	2.550 ±.020	.103 ±.003	2	2.65
568-146V	2-5/8	2-13/16	3/32	2.612 ±.020	.103 ±.003	2	2.74
568-147V	2-11/16	2-7/8	3/32	2.675 ±.022	.103 ±.003	3	2.78
568-148V	2-3/4	2-15/16	3/32	2.737 ±.022	.103 ±.003	3	2.89
568-149V	2-13/16	3	3/32	2.800 ±.022	.103 ±.003	2	2.97
568-150V	2-7/8	3-1/16	3/32	2.862 ±.022	.103 ±.003	2	3.16
568-151V	3	3-3/16	3/32	2.987 ±.024	.103 ±.003	2	3.46
568-152V	3-1/4	3-7/16	3/32	3.237 ±.024	.103 ±.003	2	3.83
568-153V	3-1/2	3-11/16	3/32	3.487 ±.024	.103 ±.003	5	4.19
568-154V	3-3/4	3-15/16	3/32	3.737 ±.028	.103 ±.003	2	4.59
568-155V	4	4-3/16	3/32	3.987 ±.028	.103 ±.003	2	4.77
568-156V	4-1/4	4-7/16	3/32	4.237 ±.030	.103 ±.003	2	5.32
568-157V	4-1/2	4-11/16	3/32	4.487 ±.030	.103 ±.003	1	5.84
568-158V	4-3/4	4-15/16	3/32	4.737 ±.030	.103 ±.003	2	6.18
568-159V	5	5-3/16	3/32	4.987 ±.035	.103 ±.003	1	6.77
568-160V	5-1/4	5-7/16	3/32	5.237 ±.035	.103 ±.003	1	7.74
568-161V	5-1/2	5-11/16	3/32	5.487 ±.035	.103 ±.003	1	8.53
568-162V	5-3/4	5-15/16	3/32	5.737 ±.035	.103 ±.003	1	9.17
568-163V	6	6-3/16	3/32	5.987 ±.035	.103 ±.003	1	9.90
568-164V	6-1/4	6-7/16	3/32	6.237 ±.040	.103 ±.003	1	10.48
568-165V	6-1/2	6-11/16	3/32	6.487 ±.040	.103 ±.003	1	11.53
568-166V	6-3/4	6-15/16	3/32	6.737 ±.040	.103 ±.003	1	11.75
568-167V	7	7-3/16	3/32	6.987 ±.040	.103 ±.003	1	11.89
568-168V	7-1/4	7-7/16	3/32	7.237 ±.045	.103 ±.003	1	12.48
568-169V	7-1/2	7-11/16	3/32	7.487 ±.045	.103 ±.003	1	13.21
568-170V	7-3/4	7-15/16	3/32	7.737 ±.045	.103 ±.003	1	15.41
568-171V	8	8-3/16	3/32	7.987 ±.045	.103 ±.003	1	16.13
568-172V	8-1/4	8-7/16	3/32	8.237 ±.050	.103 ±.003	1	16.87
568-173V	8-1/2	8-11/16	3/32	8.487 ±.050	.103 ±.003	1	15.97
568-174V	8-3/4	8-15/16	3/32	8.737 ±.050	.103 ±.003	1	17.25
568-175V	9	9-3/16	3/32	8.987 ±.050	.103 ±.003	1	17.91
568-176V	9-1/4	9-7/16	3/32	9.237 ±.055	.103 ±.003	1	19.09
568-177V	9-1/2	9-11/16	3/32	9.487 ±.055	.103 ±.003	1	19.45
568-178V	9-3/4	9-15/16	3/32	9.737 ±.055	.103 ±.003	1	20.40
1/8" C/S							
568-201V	3/16	7/16	1/8	.171 ±.005	.139 ±.004	15	\$0.79
568-202V	1/4	1/2	1/8	.234 ±.005	.139 ±.004	15	0.83
568-203V	5/16	9/16	1/8	.296 ±.005	.139 ±.004	10	0.88
568-204V	3/8	5/8	1/8	.359 ±.005	.139 ±.004	10	0.90
568-205V	7/16	11/16	1/8	.421 ±.005	.139 ±.004	8	0.90
568-206V	1/2	3/4	1/8	.484 ±.005	.139 ±.004	8	0.92

STYLE 568, 75 DURO FLUOROCARBON O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-207V	9/16	13/16	1/8	.546 ±.007	.139 ±.004	10	0.99
568-208V	5/8	7/8	1/8	.609 ±.009	.139 ±.004	7	0.99
568-209V	11/16	15/16	1/8	.671 ±.009	.139 ±.004	6	1.06
568-210V	3/4	1	1/8	.734 ±.010	.139 ±.004	5	1.12
568-211V	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	5	1.22
568-212V	7/8	1-1/8	1/8	.859 ±.010	.139 ±.004	5	1.29
568-213V	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	5	1.43
568-214V	1	1-1/4	1/8	.984 ±.010	.139 ±.004	5	1.55
568-215V	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	4	1.65
568-216V	1-1/8	1-3/8	1/8	1.109 ±.012	.139 ±.004	5	1.74
568-217V	1-3/16	1-7/16	1/8	1.171 ±.012	.139 ±.004	3	1.74
568-218V	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	3	1.88
568-219V	1-5/16	1-9/16	1/8	1.296 ±.012	.139 ±.004	3	2.00
568-220V	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	3	2.12
568-221V	1-7/16	1-11/16	1/8	1.421 ±.012	.139 ±.004	3	2.19
568-222V	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	3	2.33
568-223V	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	3	2.46
568-224V	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	3	2.72
568-225V	1-7/8	2-1/8	1/8	1.859 ±.018	.139 ±.004	3	2.95
568-226V	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	3	3.31
568-227V	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	2	3.50
568-228V	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	3	3.64
568-229V	2-3/8	2-5/8	1/8	2.359 ±.020	.139 ±.004	2	3.86
568-230V	2-1/2	2-3/4	1/8	2.484 ±.020	.139 ±.004	2	4.05
568-231V	2-5/8	2-7/8	1/8	2.609 ±.020	.139 ±.004	2	4.28
568-232V	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	2	4.41
568-233V	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	2	4.63
568-234V	3	3-1/4	1/8	2.984 ±.024	.139 ±.004	2	4.94
568-235V	3-1/8	3-3/8	1/8	3.109 ±.024	.139 ±.004	2	5.16
568-236V	3-1/4	3-1/2	1/8	3.234 ±.024	.139 ±.004	2	5.38
568-237V	3-3/8	3-5/8	1/8	3.359 ±.024	.139 ±.004	2	5.60
568-238V	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	2	5.84
568-239V	3-5/8	3-7/8	1/8	3.609 ±.028	.139 ±.004	2	6.03
568-240V	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	2	6.18
568-241V	3-7/8	4-1/8	1/8	3.859 ±.028	.139 ±.004	1	6.52
568-242V	4	4-1/4	1/8	3.984 ±.028	.139 ±.004	1	6.59
568-243V	4-1/8	4-3/8	1/8	4.109 ±.028	.139 ±.004	1	6.99
568-244V	4-1/4	4-1/2	1/8	4.234 ±.030	.139 ±.004	1	7.29
568-245V	4-3/8	4-5/8	1/8	4.359 ±.030	.139 ±.004	1	7.41
568-246V	4-1/2	4-3/4	1/8	4.484 ±.030	.139 ±.004	1	7.74
568-247V	4-5/8	4-7/8	1/8	4.609 ±.030	.139 ±.004	1	7.86
568-248V	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	1	8.02
568-249V	4-7/8	5-1/8	1/8	4.859 ±.035	.139 ±.004	1	8.23
568-250V	5	5-1/4	1/8	4.984 ±.035	.139 ±.004	1	8.71
568-251V	5-1/8	5-3/8	1/8	5.109 ±.035	.139 ±.004	1	9.11
568-252V	5-1/4	5-1/2	1/8	5.234 ±.035	.139 ±.004	1	9.70
568-253V	5-3/8	5-5/8	1/8	5.359 ±.035	.139 ±.004	1	9.86
568-254V	5-1/2	5-3/4	1/8	5.484 ±.035	.139 ±.004	1	10.21
568-255V	5-5/8	5-7/8	1/8	5.609 ±.035	.139 ±.004	1	10.65
568-256V	5-3/4	6	1/8	5.734 ±.035	.139 ±.004	1	11.01

STYLE 568, 75 DURO FLUOROCARBON O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-257V	5-7/8	6-1/8	1/8	5.859 ±.035	.139 ±.004	1	11.34
568-258V	6	6-1/4	1/8	5.984 ±.035	.139 ±.004	1	11.69
568-259V	6-1/4	6-1/2	1/8	6.234 ±.040	.139 ±.004	1	11.89
568-260V	6-1/2	6-3/4	1/8	6.484 ±.040	.139 ±.004	1	12.10
568-261V	6-3/4	7	1/8	6.734 ±.040	.139 ±.004	1	12.48
568-262V	7	7-1/4	1/8	6.984 ±.040	.139 ±.004	1	13.21
568-263V	7-1/4	7-1/2	1/8	7.234 ±.045	.139 ±.004	1	14.54
568-264V	7-1/2	7-3/4	1/8	7.484 ±.045	.139 ±.004	1	16.47
568-265V	7-3/4	8	1/8	7.734 ±.045	.139 ±.004	1	17.58
568-266V	8	8-1/4	1/8	7.984 ±.045	.139 ±.004	1	18.32
568-267V	8-1/4	8-1/2	1/8	8.234 ±.050	.139 ±.004	1	19.22
568-268V	8-1/2	8-3/4	1/8	8.484 ±.050	.139 ±.004	1	19.93
568-269V	8-3/4	9	1/8	8.734 ±.050	.139 ±.004	1	20.65
568-270V	9	9-1/4	1/8	8.984 ±.050	.139 ±.004	1	21.45
568-271V	9-1/4	9-1/2	1/8	9.234 ±.055	.139 ±.004	1	22.21
568-272V	9-1/2	9-3/4	1/8	9.484 ±.055	.139 ±.004	1	22.95
568-273V	9-3/4	10	1/8	9.734 ±.055	.139 ±.004	1	23.18
568-274V	10	10-1/4	1/8	9.984 ±.055	.139 ±.004	1	24.54
568-275V	10-1/2	10-3/4	1/8	10.484 ±.055	.139 ±.004	1	25.47
568-276V	11	11-1/4	1/8	10.984 ±.065	.139 ±.004	1	25.81
568-277V	11-1/2	11-3/4	1/8	11.484 ±.065	.139 ±.004	1	26.66
568-278V	12	12-1/4	1/8	11.984 ±.065	.139 ±.004	1	27.43
568-279V	13	13-1/4	1/8	12.984 ±.065	.139 ±.004	1	28.80
568-280V	14	14-1/4	1/8	13.984 ±.065	.139 ±.004	1	29.31
568-281V	15	15-1/4	1/8	14.984 ±.065	.139 ±.004	1	30.93
568-282V	16	16-1/4	1/8	15.955 ±.075	.139 ±.004	1	33.72
568-284V	18	18-1/4	1/8	17.955 ±.085	.139 ±.004	1	38.42
3/16" C/S							
568-309V	7/16	13/16	3/16	.412 ±.005	.210 ±.005	3	\$2.62
568-310V	1/2	7/8	3/16	.475 ±.005	.210 ±.005	3	2.74
568-311V	9/16	15/16	3/16	.537 ±.007	.210 ±.005	3	2.97
568-312V	5/8	1	3/16	.600 ±.009	.210 ±.005	3	3.07
568-313V	11/16	1-1/16	3/16	.662 ±.009	.210 ±.005	3	3.16
568-314V	3/4	1-1/8	3/16	.725 ±.010	.210 ±.005	3	3.29
568-315V	13/16	1-3/16	3/16	.787 ±.010	.210 ±.005	3	3.41
568-316V	7/8	1-1/4	3/16	.850 ±.010	.210 ±.005	3	3.22
568-317V	15/16	1-5/16	3/16	.912 ±.010	.210 ±.005	3	3.46
568-318V	1	1-3/8	3/16	.975 ±.010	.210 ±.005	2	3.51
568-319V	1-1/16	1-7/16	3/16	1.037 ±.010	.210 ±.005	2	3.62
568-320V	1-1/8	1-1/2	3/16	1.100 ±.012	.210 ±.005	2	3.72
568-321V	1-3/16	1-9/16	3/16	1.162 ±.012	.210 ±.005	2	3.76
568-322V	1-1/4	1-5/8	3/16	1.225 ±.012	.210 ±.005	2	3.76
568-323V	1-5/16	1-11/16	3/16	1.287 ±.012	.210 ±.005	2	4.19
568-324V	1-3/8	1-3/4	3/16	1.350 ±.012	.210 ±.005	2	4.41
568-325V	1-1/2	1-7/8	3/16	1.475 ±.015	.210 ±.005	2	4.74
568-326V	1-5/8	2	3/16	1.600 ±.015	.210 ±.005	1	5.02
568-327V	1-3/4	2-1/8	3/16	1.725 ±.015	.210 ±.005	1	5.16
568-328V	1-7/8	2-1/4	3/16	1.850 ±.015	.210 ±.005	1	5.51
568-329V	2	2-3/8	3/16	1.975 ±.018	.210 ±.005	1	6.29
568-330V	2-1/8	2-1/2	3/16	2.100 ±.018	.210 ±.005	1	6.84

STYLE 568, 75 DURO FLUOROCARBON O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-331V	2-1/4	2-5/8	3/16	2.225 ±.018	.210 ±.005	1	6.99
568-332V	2-3/8	2-3/4	3/16	2.350 ±.018	.210 ±.005	1	7.89
568-333V	2-1/2	2-7/8	3/16	2.475 ±.020	.210 ±.005	1	8.23
568-334V	2-5/8	3	3/16	2.600 ±.020	.210 ±.005	1	8.62
568-335V	2-3/4	3-1/8	3/16	2.725 ±.020	.210 ±.005	1	9.11
568-336V	2-7/8	3-1/4	3/16	2.850 ±.020	.210 ±.005	1	9.77
568-337V	3	3-3/8	3/16	2.975 ±.024	.210 ±.005	1	10.32
568-338V	3-1/8	3-1/2	3/16	3.100 ±.024	.210 ±.005	1	10.87
568-339V	3-1/4	3-5/8	3/16	3.225 ±.024	.210 ±.005	1	11.61
568-340V	3-3/8	3-3/4	3/16	3.350 ±.024	.210 ±.005	1	12.17
568-341V	3-1/2	3-7/8	3/16	3.475 ±.024	.210 ±.005	1	12.48
568-342V	3-5/8	4	3/16	3.600 ±.028	.210 ±.005	1	12.91
568-343V	3-3/4	4-1/8	3/16	3.725 ±.028	.210 ±.005	1	13.15
568-344V	3-7/8	4-1/4	3/16	3.850 ±.028	.210 ±.005	1	13.60
568-345V	4	4-3/8	3/16	3.975 ±.028	.210 ±.005	1	13.90
568-346V	4-1/8	4-1/2	3/16	4.100 ±.028	.210 ±.005	1	14.54
568-347V	4-1/4	4-5/8	3/16	4.225 ±.030	.210 ±.005	1	14.60
568-348V	4-3/8	4-3/4	3/16	4.350 ±.030	.210 ±.005	1	14.97
568-349V	4-1/2	4-7/8	3/16	4.475 ±.030	.210 ±.005	1	15.41
568-350V	4-5/8	5	3/16	4.600 ±.030	.210 ±.005	1	15.80
568-351V	4-3/4	5-1/8	3/16	4.725 ±.030	.210 ±.005	1	16.50
568-352V	4-7/8	5-1/4	3/16	4.850 ±.030	.210 ±.005	1	15.85
568-353V	5	5-3/8	3/16	4.975 ±.037	.210 ±.005	1	17.25
568-354V	5-1/8	5-1/2	3/16	5.100 ±.037	.210 ±.005	1	17.28
568-355V	5-1/4	5-5/8	3/16	5.225 ±.037	.210 ±.005	1	17.46
568-356V	5-3/8	5-3/4	3/16	5.350 ±.037	.210 ±.005	1	19.45
568-357V	5-1/2	5-7/8	3/16	5.475 ±.037	.210 ±.005	1	20.18
568-358V	5-5/8	6	3/16	5.600 ±.037	.210 ±.005	1	20.92
568-359V	5-3/4	6-1/8	3/16	5.725 ±.037	.210 ±.005	1	22.54
568-360V	5-7/8	6-1/4	3/16	5.850 ±.037	.210 ±.005	1	24.04
568-361V	6	6-3/8	3/16	5.975 ±.037	.210 ±.005	1	25.71
568-362V	6-1/4	6-5/8	3/16	6.225 ±.040	.210 ±.005	1	26.90
568-363V	6-1/2	6-7/8	3/16	6.475 ±.040	.210 ±.005	1	27.00
568-364V	6-3/4	7-1/8	3/16	6.725 ±.040	.210 ±.005	1	27.10
568-365V	7	7-3/8	3/16	6.975 ±.040	.210 ±.005	1	27.86
568-366V	7-1/4	7-5/8	3/16	7.225 ±.045	.210 ±.005	1	30.76
568-367V	7-1/2	7-7/8	3/16	7.475 ±.045	.210 ±.005	1	33.05
568-368V	7-3/4	8-1/8	3/16	7.725 ±.045	.210 ±.005	1	34.42
568-369V	8	8-3/8	3/16	7.975 ±.045	.210 ±.005	1	35.36
568-370V	8-1/4	8-5/8	3/16	8.225 ±.050	.210 ±.005	1	35.86
568-371V	8-1/2	8-7/8	3/16	8.475 ±.050	.210 ±.005	1	37.82
568-373V	9	9-3/8	3/16	8.975 ±.050	.210 ±.005	1	39.20
568-374V	9-1/4	9-5/8	3/16	9.225 ±.055	.210 ±.005	1	39.55
568-375V	9-1/2	9-7/8	3/16	9.475 ±.055	.210 ±.005	1	42.15
568-376V	9-3/4	10-1/8	3/16	9.725 ±.055	.210 ±.005	1	44.39
568-377V	10	10-3/8	3/16	9.975 ±.055	.210 ±.005	1	46.25
568-378V	10-1/2	10-7/8	3/16	10.475 ±.060	.210 ±.005	1	48.44
568-379V	11	11-3/8	3/16	10.975 ±.060	.210 ±.005	1	51.89
568-380V	11-1/2	11-7/8	3/16	11.475 ±.065	.210 ±.005	1	54.92
568-381V	12	12-3/8	3/16	11.975 ±.065	.210 ±.005	1	57.73

STYLE 568, 75 DURO FLUOROCARBON O-RINGS


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-382V	13	13-3/8	3/16	12.975 ±.065	.210 ±.005	1	59.52
568-383V	14	14-3/8	3/16	13.975 ±.070	.210 ±.005	1	62.62
568-384V	15	15-3/8	3/16	14.975 ±.070	.210 ±.005	1	65.76
568-385V	16	16-3/8	3/16	15.955 ±.075	.210 ±.005	1	69.01
568-386V	17	17-3/8	3/16	16.955 ±.080	.210 ±.005	1	73.06
568-388V	19	19-3/8	3/16	18.955 ±.090	.210 ±.005	1	85.73
568-389V	20	20-3/8	3/16	19.955 ±.095	.210 ±.005	1	87.57
568-390V	21	21-3/8	3/16	20.955 ±.095	.210 ±.005	1	89.48
568-392V	23	23-3/8	3/16	22.940 ±.105	.210 ±.005	1	95.93
1/4" C/S							
568-425V	4-1/2	5	1/4	4.475 ±.033	.275 ±.006	1	\$21.09
568-426V	4-5/8	5-1/8	1/4	4.600 ±.033	.275 ±.006	1	21.21
568-427V	4-3/4	5-1/4	1/4	4.725 ±.033	.275 ±.006	1	20.51
568-428V	4-7/8	5-3/8	1/4	4.850 ±.033	.275 ±.006	1	23.32
568-429V	5	5-1/2	1/4	4.975 ±.037	.275 ±.006	1	23.83
568-430V	5-1/8	5-5/8	1/4	5.100 ±.037	.275 ±.006	1	23.97
568-431V	5-1/4	5-3/4	1/4	5.225 ±.037	.275 ±.006	1	24.54
568-432V	5-3/8	5-7/8	1/4	5.350 ±.037	.275 ±.006	1	24.85
568-433V	5-1/2	6	1/4	5.475 ±.037	.275 ±.006	1	25.95
568-434V	5-5/8	6-1/8	1/4	5.600 ±.037	.275 ±.006	1	26.43
568-435V	5-3/4	6-1/4	1/4	5.725 ±.037	.275 ±.006	1	26.78
568-436V	5-7/8	6-3/8	1/4	5.850 ±.037	.275 ±.006	1	29.26
568-437V	6	6-1/2	1/4	5.975 ±.037	.275 ±.006	1	28.12
568-438V	6-1/4	6-3/4	1/4	6.225 ±.040	.275 ±.006	1	29.20
568-439V	6-1/2	7	1/4	6.475 ±.040	.275 ±.006	1	30.55
568-440V	6-3/4	7-1/4	1/4	6.725 ±.040	.275 ±.006	1	31.50
568-441V	7	7-1/2	1/4	6.975 ±.040	.275 ±.006	1	33.72
568-442V	7-1/4	7-3/4	1/4	7.225 ±.045	.275 ±.006	1	36.69
568-443V	7-1/2	8	1/4	7.475 ±.045	.275 ±.006	1	38.85
568-444V	7-3/4	8-1/4	1/4	7.725 ±.045	.275 ±.006	1	38.15
568-445V	8	8-1/2	1/4	7.975 ±.045	.275 ±.006	1	41.37
568-446V	8-1/2	9	1/4	8.475 ±.055	.275 ±.006	1	43.51
568-447V	9	9-1/2	1/4	8.975 ±.055	.275 ±.006	1	45.44
568-448V	9-1/2	10	1/4	9.475 ±.055	.275 ±.006	1	47.42
568-449V	10	10-1/2	1/4	9.975 ±.055	.275 ±.006	1	51.14
568-450V	10-1/2	11	1/4	10.475 ±.060	.275 ±.006	1	55.24
568-451V	11	11-1/2	1/4	10.975 ±.060	.275 ±.006	1	56.25
568-452V	11-1/2	12	1/4	11.475 ±.060	.275 ±.006	1	58.66
568-453V	12	12-1/2	1/4	11.975 ±.060	.275 ±.006	1	60.72
568-454V	12-1/2	13	1/4	12.475 ±.060	.275 ±.006	1	63.05
568-455V	13	13-1/2	1/4	12.975 ±.060	.275 ±.006	1	65.25
568-456V	13-1/2	14	1/4	13.475 ±.070	.275 ±.006	1	65.45
568-457V	14	14-1/2	1/4	13.975 ±.070	.275 ±.006	1	69.60
568-458V	14-1/2	15	1/4	14.475 ±.070	.275 ±.006	1	70.44
568-459V	15	15-1/2	1/4	14.975 ±.070	.275 ±.006	1	73.06
568-460V	15-1/2	16	1/4	15.475 ±.070	.275 ±.006	1	74.23
568-464V	17-1/2	18	1/4	17.455 ±.085	.275 ±.006	1	103.08
568-465V	18	18-1/2	1/4	17.955 ±.085	.275 ±.006	1	106.51
568-466V	18-1/2	19	1/4	18.455 ±.085	.275 ±.006	1	107.98
568-468V	19-1/2	20	1/4	19.455 ±.090	.275 ±.006	1	114.95

STYLE 568, 75 DURO FLUOROCARBON O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-473V	24	24-1/2	1/4	23.940 ±.110	.275 ±.006	1	140.95
568-475V	26	26-1/2	1/4	25.940 ±.120	.275 ±.006	1	164.57

STYLE 568, 75 DURO FLUOROCARBON O-RINGS

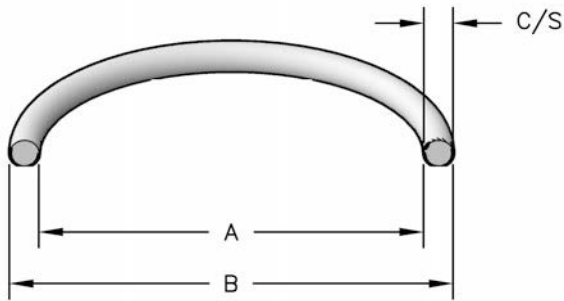

SEAL INFORMATION	
MATERIAL	BLACK FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (Black)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
568-007V-BLACK	5/32	9/32	1/16	.145 ±.005	.070 ±.003	40	\$0.38
568-008V-BLACK	3/16	5/16	1/16	.176 ±.005	.070 ±.003	40	0.36
568-010V-BLACK	1/4	3/8	1/16	.239 ±.005	.070 ±.003	30	0.36
568-011V-BLACK	5/16	7/16	1/16	.301 ±.005	.070 ±.003	30	0.36
568-012V-BLACK	3/8	1/2	1/16	.364 ±.005	.070 ±.003	20	0.38
568-014V-BLACK	1/2	5/8	1/16	.489 ±.005	.070 ±.003	20	0.41
568-015V-BLACK	9/16	11/16	1/16	.551 ±.007	.070 ±.003	20	0.48
568-016V-BLACK	5/8	3/4	1/16	.614 ±.009	.070 ±.003	20	0.48
568-020V-BLACK	7/8	1	1/16	.864 ±.009	.070 ±.003	20	0.29
568-021V-BLACK	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	20	0.31
568-032V-BLACK	1-7/8	2	1/16	1.864 ±.015	.070 ±.003	10	1.64
3/32" C/S							
568-110V-BLACK	3/8	9/16	3/32	.362 ±.005	.103 ±.003	15	\$0.41
568-111V-BLACK	7/16	5/8	3/32	.424 ±.005	.103 ±.003	15	0.43
568-112V-BLACK	1/2	11/16	3/32	.487 ±.005	.103 ±.003	15	0.51
568-113V-BLACK	9/16	3/4	3/32	.549 ±.005	.103 ±.003	15	0.51
568-114V-BLACK	5/8	13/16	3/32	.612 ±.009	.103 ±.003	15	0.60
568-115V-BLACK	11/16	7/8	3/32	.674 ±.009	.103 ±.003	15	0.62
568-116V-BLACK	3/4	15/16	3/32	.737 ±.009	.103 ±.003	10	0.69
568-119V-BLACK	15/16	1-1/8	3/32	.924 ±.010	.103 ±.003	10	0.95
568-125V-BLACK	1-5/16	1-1/2	3/32	1.299 ±.012	.103 ±.003	5	0.95
568-129V-BLACK	1-9/16	1-3/4	3/32	1.549 ±.015	.103 ±.003	5	1.65
568-136V-BLACK	2	2-3/16	3/32	1.987 ±.017	.103 ±.003	3	2.10
568-145V-BLACK	2-9/16	2-3/4	3/32	2.550 ±.020	.103 ±.003	2	2.74
568-146V-BLACK	2-5/8	2-13/16	3/32	2.612 ±.020	.103 ±.003	2	4.12
568-151V-BLACK	3	3-3/16	3/32	2.987 ±.024	.103 ±.003	2	4.45
568-161V-BLACK	5-1/2	5-11/16	3/32	5.487 ±.035	.103 ±.003	2	9.51
568-162V-BLACK	5-3/4	5-15/16	3/32	5.737 ±.035	.103 ±.003	2	9.10
568-163V-BLACK	6	6-3/16	3/32	5.987 ±.035	.103 ±.003	2	10.44
1/8" C/S							
568-206V-BLACK	1/2	3/4	1/8	.484 ±.005	.139 ±.004	5	\$1.54
568-208V-BLACK	5/8	7/8	1/8	.609 ±.009	.139 ±.004	5	0.99
568-210V-BLACK	3/4	1	1/8	.734 ±.010	.139 ±.004	5	1.02
568-211V-BLACK	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	5	1.81
568-213V-BLACK	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	5	1.29
568-214V-BLACK	1	1-1/4	1/8	.984 ±.010	.139 ±.004	5	1.38

STYLE 568, 75 DURO FLUOROCARBON O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-218V-BLACK	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	5	1.77
568-220V-BLACK	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	3	1.82
568-222V-BLACK	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	3	2.29
568-228V-BLACK	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	3	3.34
568-231V-BLACK	2-5/8	2-7/8	1/8	2.609 ±.020	.139 ±.004	2	4.52
568-233V-BLACK	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	2	6.46
568-236V-BLACK	3-1/4	3-1/2	1/8	3.234 ±.024	.139 ±.004	2	5.38
568-237V-BLACK	3-3/8	3-5/8	1/8	3.359 ±.024	.139 ±.004	2	5.60
568-238V-BLACK	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	2	5.84
568-240V-BLACK	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	1	6.18
568-241V-BLACK	3-7/8	4-1/8	1/8	3.859 ±.028	.139 ±.004	1	6.52
568-245V-BLACK	4-3/8	4-5/8	1/8	4.359 ±.030	.139 ±.004	1	11.39
568-248V-BLACK	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	1	10.56
3/16" C/S							
568-331V-BLACK	2-1/4	2-5/8	3/16	2.225 ±.018	.210 ±.005	1	\$10.60
568-334V-BLACK	2-5/8	3	3/16	2.600 ±.020	.210 ±.005	1	11.69
568-335V-BLACK	2-3/4	3-1/8	3/16	2.725 ±.020	.210 ±.005	1	12.35
568-336V-BLACK	2-7/8	3-1/4	3/16	2.850 ±.020	.210 ±.005	1	12.91
568-354V-BLACK	5-1/8	5-1/2	3/16	5.100 ±.037	.210 ±.005	1	17.03
568-360V-BLACK	5-7/8	6-1/4	3/16	5.850 ±.037	.210 ±.005	1	24.04
568-368V-BLACK	7-3/4	8-1/8	3/16	7.725 ±.045	.210 ±.005	1	34.42
1/4" C/S							
568-445V-BLACK	8	8-1/2	1/4	7.975 ±.045	.275 ±.006	1	\$41.37


STYLE 568, 75 DURO FLUOROCARBON O-RING CORD

NOTE: Cord is Black fluorocarbon.
See O-Ring Kit section for splicing Information.
Sold by the foot.

SEAL INFORMATION	
MATERIAL	BLACK FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) (Cord) - (Nom. Size) (Fluorocarbon)

Part Number	Nom. Cross Section	CROSS SECTION	List Price
568C-062V	1/16	.070 ±.006	\$3.09
568C-093V	3/32	.103 ±.007	3.67
568C-125V	1/8	.139 ±.007	5.65
568C-187V	3/16	.210 ±.008	9.41
568C-250V	1/4	.275 ±.008	15.99

STYLE 568, 90 DURO FLUOROCARBON O-RINGS

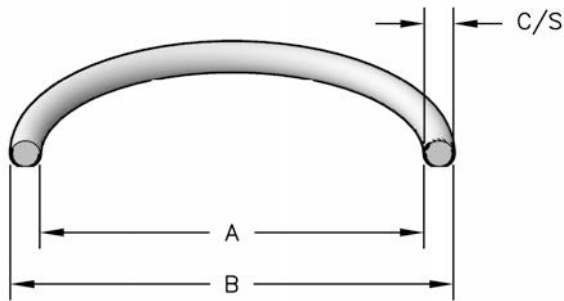

SEAL INFORMATION	
MATERIAL	FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (90 Duro Fluorocarbon)


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
568-011-90DV	5/16	7/16	1/16	.301 ±.005	.070 ±.003	15	\$0.73
568-012-90DV	3/8	1/2	1/16	.364 ±.005	.070 ±.003	15	0.78
568-014-90DV	1/2	5/8	1/16	.489 ±.005	.070 ±.003	10	0.88
568-015-90DV	9/16	11/16	1/16	.551 ±.007	.070 ±.003	15	0.80
568-016-90DV	5/8	3/4	1/16	.614 ±.009	.070 ±.003	15	0.80
568-017-90DV	11/16	13/16	1/16	.676 ±.009	.070 ±.003	15	0.79
568-018-90DV	3/4	7/8	1/16	.739 ±.009	.070 ±.003	15	0.80
568-019-90DV	13/16	15/16	1/16	.801 ±.009	.070 ±.003	15	0.80
568-020-90DV	7/8	1	1/16	.864 ±.009	.070 ±.003	15	0.82
568-021-90DV	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	15	0.88
568-022-90DV	1	1-1/8	1/16	.989 ±.010	.070 ±.003	15	0.88
568-025-90DV	1-3/16	1-5/16	1/16	1.176 ±.011	.070 ±.003	15	1.07
3/32" C/S							
568-113-90DV	9/16	3/4	3/32	.549 ±.005	.103 ±.003	15	\$0.94
568-121-90DV	1-1/16	1-1/4	3/32	1.049 ±.010	.103 ±.003	1	8.24
568-131-90DV	1-11/16	1-7/8	3/32	1.674 ±.015	.103 ±.003	1	1.94
568-159-90DV	5	5-3/16	3/32	4.987 ±.035	.103 ±.003	1	7.76
1/8" C/S							
568-214-90DV	1	1-1/4	1/8	.984 ±.010	.139 ±.004	3	\$2.44
568-215-90DV-BLACK	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	1	1.47
568-218-90DV	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	2	3.45
568-223-90DV	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	2	3.63
568-224-90DV	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	2	4.94
568-226-90DV	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	2	6.15
568-227-90DV	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	2	6.15
568-232-90DV	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	3	2.63
568-233-90DV	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	3	5.92
568-239-90DV	3-5/8	3-7/8	1/8	3.609 ±.028	.139 ±.004	2	6.26
568-240-90DV	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	1	9.30
568-246-90DV	4-1/2	4-3/4	1/8	4.484 ±.030	.139 ±.004	1	8.20
568-254-90DV	5-1/2	5-3/4	1/8	5.484 ±.035	.139 ±.004	1	10.13
568-260-90DV	6-1/2	6-3/4	1/8	6.484 ±.040	.139 ±.004	1	12.46
568-264-90DV	7-1/2	7-3/4	1/8	7.484 ±.045	.139 ±.004	1	14.01
568-272-90DV	9-1/2	9-3/4	1/8	9.484 ±.055	.139 ±.004	1	27.93
568-277-90DV	11-1/2	11-3/4	1/8	11.484 ±.065	.139 ±.004	1	30.53
3/16" C/S							

STYLE 568, 90 DURO FLUOROCARBON O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-334-90DV	2-5/8	3	3/16	2.600 ±.020	.210 ±.005	1	\$9.77
568-363-90DV	6-1/2	6-7/8	3/16	6.475 ±.040	.210 ±.005	1	27.14
568-364-90DV	6-3/4	7-1/8	3/16	6.725 ±.040	.210 ±.005	1	27.29
1/4" C/S							
568-433-90DV	5-1/2	6	1/4	5.475 ±.037	.275 ±.006	1	\$25.65

STYLE 568, 90 DURO FLUOROCARBON BOSS O-RINGS

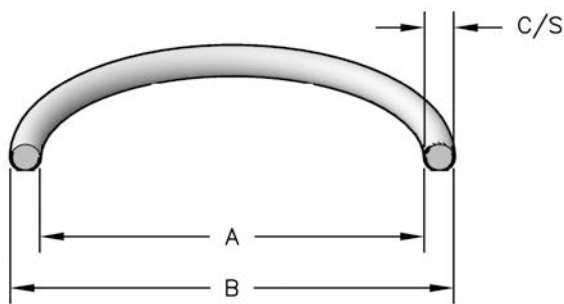


SEAL INFORMATION	
MATERIAL	FLUOROCARBON
TEMPERATURE RANGE	-20° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (90 Duro Fluorocarbon)

Part Number	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-901V	.185 ±.005	.056 ±.003	10	\$0.89
568-902V	.239 ±.005	.064 ±.003	10	1.00
568-903V	.301 ±.005	.064 ±.003	10	1.01
568-904V	.351 ±.005	.072 ±.003	10	1.08
568-905V	.414 ±.005	.072 ±.003	10	1.10
568-906V	.468 ±.005	.078 ±.003	10	1.15
568-907V	.530 ±.005	.082 ±.003	10	1.22
568-908V	.644 ±.009	.087 ±.003	10	1.35
568-909V	.706 ±.009	.097 ±.003	10	1.70
568-910V	.755 ±.009	.097 ±.003	10	1.83
568-911V	.863 ±.009	.116 ±.004	5	2.13
568-912V	.924 ±.009	.116 ±.004	5	2.42
568-913V	.986 ±.010	.116 ±.004	5	2.29
568-914V	1.047 ±.010	.116 ±.004	3	3.05
568-916V	1.171 ±.010	.116 ±.004	3	3.27
568-918V	1.355 ±.012	.116 ±.004	3	3.41
568-920V	1.475 ±.012	.118 ±.004	3	4.00
568-924V	1.720 ±.014	.118 ±.004	2	5.61
568-924V-BLACK	1.720 ±.014	.118 ±.004	2	5.61
568-928V	2.090 ±.018	.118 ±.004	2	6.85
568-932V	2.337 ±.018	.118 ±.004	2	7.56

STYLE 568 70A & 90A DURO ETHYLENE PROPYLENE O-RINGS

NOTE: This compound is NOT D.O.T. certified for brake system use.

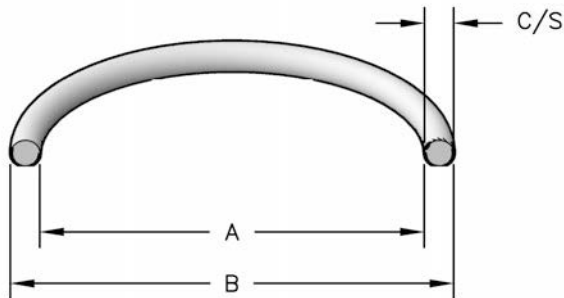


SEAL INFORMATION

MATERIAL	ETHYLENE PROPYLENE
TEMPERATURE RANGE	-65° TO +300° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) - (Ethylene Propylene)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
568-008EP	3/16	5/16	1/16	.176 ±.005	.070 ±.003	14	\$0.55
568-010EP	1/4	3/8	1/16	.239 ±.005	.070 ±.003	12	0.60
568-011EP	5/16	7/16	1/16	.301 ±.005	.070 ±.003	12	0.65
568-012EP	3/8	1/2	1/16	.364 ±.005	.070 ±.003	12	0.69
568-013EP	7/16	9/16	1/16	.426 ±.005	.070 ±.003	8	0.93
568-014EP	1/2	5/8	1/16	.489 ±.005	.070 ±.003	6	0.94
568-015EP	9/16	11/16	1/16	.551 ±.007	.070 ±.003	10	0.94
568-018EP	3/4	7/8	1/16	.739 ±.009	.070 ±.003	6	1.08
568-043EP	3-1/2	3-5/8	1/16	3.489 ±.024	.070 ±.003	2	4.21
3/32" C/S							
568-110EP	3/8	9/16	3/32	.362 ±.005	.103 ±.003	10	\$0.72
568-111EP	7/16	5/8	3/32	.424 ±.005	.103 ±.003	10	0.77
568-112EP	1/2	11/16	3/32	.487 ±.005	.103 ±.003	8	0.80
568-113EP	9/16	3/4	3/32	.549 ±.005	.103 ±.003	8	0.83
568-114EP	5/8	13/16	3/32	.612 ±.009	.103 ±.003	8	0.89
568-115EP	11/16	7/8	3/32	.674 ±.009	.103 ±.003	8	0.90
568-116EP	3/4	15/16	3/32	.737 ±.009	.103 ±.003	8	0.94
568-126-90DEP	1-3/8	1-9/16	3/32	1.362 ±.012	.103 ±.003	5	0.63
568-144-90DEP	2-1/2	2-11/16	3/32	2.487 ±.020	.103 ±.003	3	0.95
1/8" C/S							
568-210EP	3/4	1	1/8	.734 ±.010	.139 ±.004	8	\$0.97
568-212EP	7/8	1-1/8	1/8	.859 ±.010	.139 ±.004	5	1.08
568-214EP	1	1-1/4	1/8	.984 ±.010	.139 ±.004	6	1.20
568-215EP	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	6	1.23
568-218EP	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	5	1.34
568-220EP	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	5	1.41
568-222EP	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	5	1.47
568-238EP	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	1	2.44
568-248EP	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	3	2.97
568-281-90DEP	15	15-1/4	1/8	14.984 ±.065	.139 ±.004	1	5.66
3/16" C/S							
568-327EP	1-3/4	2-1/8	3/16	1.725 ±.015	.210 ±.005	5	\$1.55

STYLE 568, 70A DURO SILICONE O-RINGS

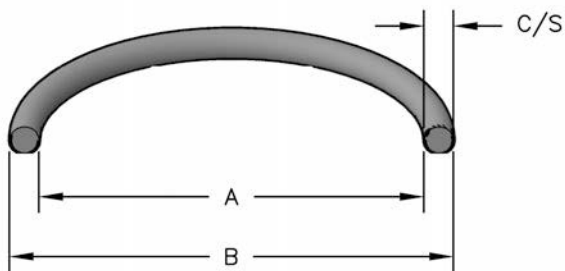


SEAL INFORMATION	
MATERIAL	SILICONE
TEMPERATURE RANGE	-70° TO +400° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (Silicone)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
568-008S	3/16	5/16	1/16	.176 ±.005	.070 ±.003	50	\$0.51
568-010S	1/4	3/8	1/16	.239 ±.005	.070 ±.003	20	0.57
568-011S	5/16	7/16	1/16	.301 ±.005	.070 ±.003	20	0.59
568-012S	3/8	1/2	1/16	.364 ±.005	.070 ±.003	20	0.59
568-013S	7/16	9/16	1/16	.426 ±.005	.070 ±.003	20	0.59
568-014S	1/2	5/8	1/16	.489 ±.005	.070 ±.003	12	0.58
568-015S	9/16	11/16	1/16	.551 ±.007	.070 ±.003	20	0.60
568-016S	5/8	3/4	1/16	.614 ±.009	.070 ±.003	12	0.62
568-018S	3/4	7/8	1/16	.739 ±.009	.070 ±.003	12	0.62
568-025S	1-3/16	1-5/16	1/16	1.176 ±.011	.070 ±.003	11	0.62
568-028S	1-3/8	1-1/2	1/16	1.364 ±.013	.070 ±.003	11	1.26
568-042S	3-1/4	3-3/8	1/16	3.239 ±.024	.070 ±.003	10	0.80
3/32" C/S							
568-108S	1/4	7/16	3/32	.237 ±.005	.103 ±.003	12	\$0.51
568-110S	3/8	9/16	3/32	.362 ±.005	.103 ±.003	12	0.55
568-111S	7/16	5/8	3/32	.424 ±.005	.103 ±.003	12	0.57
568-112S	1/2	11/16	3/32	.487 ±.005	.103 ±.003	12	0.77
568-113S	9/16	3/4	3/32	.549 ±.005	.103 ±.003	14	0.51
568-115S	11/16	7/8	3/32	.674 ±.009	.103 ±.003	13	0.57
568-116S	3/4	15/16	3/32	.737 ±.009	.103 ±.003	12	0.59
568-117S	13/16	1	3/32	.799 ±.010	.103 ±.003	11	0.62
568-118S	7/8	1-1/16	3/32	.862 ±.010	.103 ±.003	10	0.69
568-120S	1	1-3/16	3/32	.987 ±.010	.103 ±.003	8	0.72
1/8" C/S							
568-210S	3/4	1	1/8	.734 ±.010	.139 ±.004	10	\$0.78
568-211S	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	9	0.79
568-212S	7/8	1-1/8	1/8	.859 ±.010	.139 ±.004	8	0.94
568-213S	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	7	1.01
568-214S	1	1-1/4	1/8	.984 ±.010	.139 ±.004	7	1.10
568-215S	1-1/16	1-5/16	1/8	1.046 ±.010	.139 ±.004	6	1.23
568-216S	1-1/8	1-3/8	1/8	1.109 ±.012	.139 ±.004	6	1.23
568-218S	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	6	1.34
568-219S	1-5/16	1-9/16	1/8	1.296 ±.012	.139 ±.004	6	1.37
568-220S	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	5	1.41
568-222S	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	8	1.73
568-223S	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	5	1.79

STYLE 568, 70A DURO SILICONE O-RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-224S	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	5	1.89
568-226S	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	4	2.00
568-227S	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	4	2.07
568-228S	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	4	2.13
568-231S	2-5/8	2-7/8	1/8	2.609 ±.020	.139 ±.004	3	2.59
568-232S	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	3	2.67
568-238S	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	3	3.13
568-239S	3-5/8	3-7/8	1/8	3.609 ±.028	.139 ±.004	2	3.63
568-240S	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	2	3.72
568-248S	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	2	5.67
568-265S	7-3/4	8	1/8	7.734 ±.045	.139 ±.004	1	4.71
3/16" C/S							
568-312S	5/8	1	3/16	.600 ±.009	.210 ±.005	7	\$0.51
568-320S	1-1/8	1-1/2	3/16	1.100 ±.012	.210 ±.005	5	1.46
568-325S	1-1/2	1-7/8	3/16	1.475 ±.015	.210 ±.005	4	1.89
568-326S	1-5/8	2	3/16	1.600 ±.015	.210 ±.005	4	2.03
568-329S	2	2-3/8	3/16	1.975 ±.018	.210 ±.005	3	2.46
568-334S	2-5/8	3	3/16	2.600 ±.020	.210 ±.005	3	2.77
568-367S	7-1/2	7-7/8	3/16	7.475 ±.045	.210 ±.005	1	8.63
1/4" C/S							
568-445S	8	8-1/2	1/4	7.975 ±.045	.275 ±.006	1	\$29.21

STYLE 568, 55 - 58 SHORE D PTFE O-RING



SEAL INFORMATION

MATERIAL	55 - 58 SHORE D PTFE
TEMPERATURE RANGE	-100° TO +500° F

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
568-006T	1/8	1/4	1/16	.114 ±.005	.070 ±.003	7	\$1.90
568-009T	7/32	11/32	1/16	.208 ±.005	.070 ±.003	6	2.32
568-010T	1/4	3/8	1/16	.239 ±.005	.070 ±.003	5	2.32
568-011T	5/16	7/16	1/16	.301 ±.005	.070 ±.003	5	2.32
568-012T	3/8	1/2	1/16	.364 ±.005	.070 ±.003	5	3.15
568-013T	7/16	9/16	1/16	.426 ±.005	.070 ±.003	6	2.47
568-014T	1/2	5/8	1/16	.489 ±.005	.070 ±.003	5	2.65
568-015T	9/16	11/16	1/16	.551 ±.007	.070 ±.003	5	2.80
568-016T	5/8	3/4	1/16	.614 ±.009	.070 ±.003	4	3.75
568-018T	3/4	7/8	1/16	.739 ±.009	.070 ±.003	4	3.57
568-020T	7/8	1	1/16	.864 ±.009	.070 ±.003	4	3.80
568-021T	15/16	1-1/16	1/16	.926 ±.009	.070 ±.003	3	4.45
568-022T	1	1-1/8	1/16	.989 ±.010	.070 ±.003	3	4.45
568-023T	1-1/16	1-3/16	1/16	1.051 ±.010	.070 ±.003	3	4.50
568-024T	1-1/8	1-1/4	1/16	1.114 ±.010	.070 ±.003	3	4.50
568-026T	1-1/4	1-3/8	1/16	1.239 ±.011	.070 ±.003	3	5.80
568-028T	1-3/8	1-1/2	1/16	1.364 ±.013	.070 ±.003	2	6.52
568-029T	1-1/2	1-5/8	1/16	1.489 ±.013	.070 ±.003	2	7.07


STYLE 568, 55 - 58 SHORE D PTFE O-RING



568-030T	1-5/8	1-3/4	1/16	1.614 ±013	.070 ±003	2	7.07
568-032T	1-7/8	2	1/16	1.864 ±015	.070 ±003	2	7.42
3/32" C/S							
568-109T	5/16	1/2	3/32	.299 ±005	.103 ±003	5	\$2.98
568-110T	3/8	9/16	3/32	.362 ±005	.103 ±003	5	2.98
568-111T	7/16	5/8	3/32	.424 ±005	.103 ±003	5	2.98
568-112T	1/2	11/16	3/32	.487 ±005	.103 ±003	4	3.27
568-114T	5/8	13/16	3/32	.612 ±009	.103 ±003	4	3.30
568-115T	11/16	7/8	3/32	.674 ±009	.103 ±003	4	3.30
568-116T	3/4	15/16	3/32	.737 ±009	.103 ±003	4	3.75
568-117T	13/16	1	3/32	.799 ±010	.103 ±003	4	4.37
568-121T	1-1/16	1-1/4	3/32	1.049 ±010	.103 ±003	4	6.92
568-122T	1-1/8	1-5/16	3/32	1.112 ±010	.103 ±003	4	6.92
568-126T	1-3/8	1-9/16	3/32	1.362 ±012	.103 ±003	3	5.63
568-132T	1-3/4	1-15/16	3/32	1.737 ±015	.103 ±003	2	6.68
568-133T	1-13/16	2	3/32	1.799 ±015	.103 ±003	2	6.85
568-137T	2-1/16	2-1/4	3/32	2.050 ±017	.103 ±003	2	9.20
568-142T	2-3/8	2-9/16	3/32	2.362 ±020	.103 ±003	2	11.27
1/8" C/S							
568-210T	3/4	1	1/8	.734 ±010	.139 ±004	3	\$3.94
568-212T	7/8	1-1/8	1/8	.859 ±010	.139 ±004	2	7.56
568-213T	15/16	1-3/16	1/8	.921 ±010	.139 ±004	3	4.90
568-214T	1	1-1/4	1/8	.984 ±010	.139 ±004	3	4.90
568-215T	1-1/16	1-5/16	1/8	1.046 ±010	.139 ±004	3	5.05
568-218T	1-1/4	1-1/2	1/8	1.234 ±012	.139 ±004	1	7.63
568-219T	1-5/16	1-9/16	1/8	1.296 ±012	.139 ±004	2	7.63
568-220T	1-3/8	1-5/8	1/8	1.359 ±012	.139 ±004	2	8.48
568-223T	1-5/8	1-7/8	1/8	1.609 ±015	.139 ±004	2	10.69
568-224T	1-3/4	2	1/8	1.734 ±015	.139 ±004	2	10.69
568-225T	1-7/8	2-1/8	1/8	1.859 ±018	.139 ±004	2	11.27
568-226T	2	2-1/4	1/8	1.984 ±018	.139 ±004	2	11.27
568-228T	2-1/4	2-1/2	1/8	2.234 ±020	.139 ±004	1	12.47
568-229T	2-3/8	2-5/8	1/8	2.359 ±020	.139 ±004	1	12.47
568-231T	2-5/8	2-7/8	1/8	2.609 ±020	.139 ±004	1	12.74
568-232T	2-3/4	3	1/8	2.734 ±024	.139 ±004	1	13.37
568-234T	3	3-1/4	1/8	2.984 ±024	.139 ±004	1	13.92
568-235T	3-1/8	3-3/8	1/8	3.109 ±024	.139 ±004	1	14.37
568-236T	3-1/4	3-1/2	1/8	3.234 ±024	.139 ±004	1	14.52
568-240T	3-3/4	4	1/8	3.734 ±028	.139 ±004	1	15.88
568-242T	4	4-1/4	1/8	3.984 ±028	.139 ±004	1	17.35
568-248T	4-3/4	5	1/8	4.734 ±030	.139 ±004	1	29.67
568-258T	6	6-1/4	1/8	5.984 ±035	.139 ±004	1	65.29
568-268T	8-1/2	8-3/4	1/8	8.484 ±050	.139 ±004	1	92.35
568-273T	9-3/4	10	1/8	9.734 ±055	.139 ±004	1	105.05
3/16" C/S							
568-326T	1-5/8	2	3/16	1.600 ±015	.210 ±005	1	\$14.85
568-327T	1-3/4	2-1/8	3/16	1.725 ±015	.210 ±005	1	14.85
568-330T	2-1/8	2-1/2	3/16	2.100 ±018	.210 ±005	1	16.78
568-342T	3-5/8	4	3/16	3.600 ±028	.210 ±005	1	26.32

Seal color may vary. Special order sizes are available.

STYLE 568, 90 DURO URETHANE O-RINGS

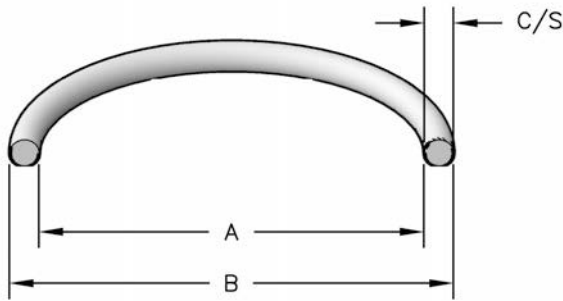

SEAL INFORMATION	
MATERIAL	90A URETHANE
TEMPERATURE RANGE	-65° TO +220° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE
PART NUMBER	(Prefix) - (Dash No.) (Urethane)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
568-006U	1/8	1/4	1/16	.114 ±.005	.070 ±.003	4	\$2.44
568-008U	3/16	5/16	1/16	.176 ±.005	.070 ±.003	3	3.03
568-009U	7/32	11/32	1/16	.208 ±.005	.070 ±.003	3	3.07
568-010U	1/4	3/8	1/16	.239 ±.005	.070 ±.003	3	3.06
568-011U	5/16	7/16	1/16	.301 ±.005	.070 ±.003	3	3.15
568-012U	3/8	1/2	1/16	.364 ±.005	.070 ±.003	3	3.20
568-013U	7/16	9/16	1/16	.426 ±.005	.070 ±.003	3	3.22
568-014U	1/2	5/8	1/16	.489 ±.005	.070 ±.003	3	3.22
568-014U-70D	1/2	5/8	1/16	.489 ±.005	.070 ±.003	3	3.22
568-015U	9/16	11/16	1/16	.551 ±.007	.070 ±.003	1	3.24
568-016U	5/8	3/4	1/16	.614 ±.009	.070 ±.003	3	3.24
568-016U-70D	5/8	3/4	1/16	.614 ±.009	.070 ±.003	3	4.46
568-017U	11/16	13/16	1/16	.676 ±.009	.070 ±.003	3	3.34
568-018U	3/4	7/8	1/16	.739 ±.009	.070 ±.003	3	3.41
568-020U	7/8	1	1/16	.864 ±.009	.070 ±.003	3	3.44
568-022U	1	1-1/8	1/16	.989 ±.010	.070 ±.003	3	4.55
568-023U	1-1/16	1-3/16	1/16	1.051 ±.010	.070 ±.003	3	4.55
568-031U	1-3/4	1-7/8	1/16	1.739 ±.015	.070 ±.003	2	6.44
3/32" C/S							
568-110U	3/8	9/16	3/32	.362 ±.005	.103 ±.003	2	\$4.00
568-111U	7/16	5/8	3/32	.424 ±.005	.103 ±.003	2	4.00
568-112U	1/2	11/16	3/32	.487 ±.005	.103 ±.003	3	4.00
568-113U	9/16	3/4	3/32	.549 ±.005	.103 ±.003	2	5.57
568-114U	5/8	13/16	3/32	.612 ±.009	.103 ±.003	2	5.00
568-115U	11/16	7/8	3/32	.674 ±.009	.103 ±.003	2	5.00
568-116U	3/4	15/16	3/32	.737 ±.009	.103 ±.003	2	6.09
568-117U	13/16	1	3/32	.799 ±.010	.103 ±.003	2	6.43
568-118U	7/8	1-1/16	3/32	.862 ±.010	.103 ±.003	2	7.29
568-119U	15/16	1-1/8	3/32	.924 ±.010	.103 ±.003	2	7.29
568-120U	1	1-3/16	3/32	.987 ±.010	.103 ±.003	2	7.77
568-121U	1-1/16	1-1/4	3/32	1.049 ±.010	.103 ±.003	2	7.77
568-122U	1-1/8	1-5/16	3/32	1.112 ±.010	.103 ±.003	2	7.77
568-123U	1-3/16	1-3/8	3/32	1.174 ±.012	.103 ±.003	2	8.49
568-124U	1-1/4	1-7/16	3/32	1.237 ±.012	.103 ±.003	2	8.49
568-131U	1-11/16	1-7/8	3/32	1.674 ±.015	.103 ±.003	2	11.23
568-133U	1-13/16	2	3/32	1.799 ±.015	.103 ±.003	2	11.23


Seal color may vary. Special order sizes are available.

STYLE 568, 90 DURO URETHANE O-RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
568-134U	1-7/8	2-1/16	3/32	1.862 ±.015	.103 ±.003	1	11.23
568-136U-70D	2	2-3/16	3/32	1.987 ±.017	.103 ±.003	2	7.31
568-148U	2-3/4	2-15/16	3/32	2.737 ±.022	.103 ±.003	1	12.07
1/8" C/S							
568-206U	1/2	3/4	1/8	.484 ±.005	.139 ±.004	3	\$4.02
568-210U	3/4	1	1/8	.734 ±.010	.139 ±.004	3	5.17
568-211U	13/16	1-1/16	1/8	.796 ±.010	.139 ±.004	2	5.17
568-213U	15/16	1-3/16	1/8	.921 ±.010	.139 ±.004	2	5.27
568-216U	1-1/8	1-3/8	1/8	1.109 ±.012	.139 ±.004	2	5.59
568-218U	1-1/4	1-1/2	1/8	1.234 ±.012	.139 ±.004	2	5.59
568-219U	1-5/16	1-9/16	1/8	1.296 ±.012	.139 ±.004	2	6.67
568-220U	1-3/8	1-5/8	1/8	1.359 ±.012	.139 ±.004	2	9.72
568-221U	1-7/16	1-11/16	1/8	1.421 ±.012	.139 ±.004	2	7.09
568-222U	1-1/2	1-3/4	1/8	1.484 ±.015	.139 ±.004	2	7.09
568-223U	1-5/8	1-7/8	1/8	1.609 ±.015	.139 ±.004	2	10.34
568-224U	1-3/4	2	1/8	1.734 ±.015	.139 ±.004	2	10.34
568-225U	1-7/8	2-1/8	1/8	1.859 ±.018	.139 ±.004	1	11.06
568-226U	2	2-1/4	1/8	1.984 ±.018	.139 ±.004	2	11.06
568-227U	2-1/8	2-3/8	1/8	2.109 ±.018	.139 ±.004	2	11.06
568-228U	2-1/4	2-1/2	1/8	2.234 ±.020	.139 ±.004	2	11.06
568-230U	2-1/2	2-3/4	1/8	2.484 ±.020	.139 ±.004	2	11.34
568-232U	2-3/4	3	1/8	2.734 ±.024	.139 ±.004	2	11.95
568-233U	2-7/8	3-1/8	1/8	2.859 ±.024	.139 ±.004	1	11.95
568-234U	3	3-1/4	1/8	2.984 ±.024	.139 ±.004	1	11.95
568-235U	3-1/8	3-3/8	1/8	3.109 ±.024	.139 ±.004	1	14.59
568-236U	3-1/4	3-1/2	1/8	3.234 ±.024	.139 ±.004	1	14.94
568-238U	3-1/2	3-3/4	1/8	3.484 ±.024	.139 ±.004	1	18.54
568-240U	3-3/4	4	1/8	3.734 ±.028	.139 ±.004	1	18.54
568-242U	4	4-1/4	1/8	3.984 ±.028	.139 ±.004	1	22.17
568-244U	4-1/4	4-1/2	1/8	4.234 ±.030	.139 ±.004	1	33.63
568-248U	4-3/4	5	1/8	4.734 ±.030	.139 ±.004	1	36.04
568-256U	5-3/4	6	1/8	5.734 ±.035	.139 ±.004	1	52.28
568-260U	6-1/2	6-3/4	1/8	6.484 ±.040	.139 ±.004	1	62.74
3/16" C/S							
568-326U	1-5/8	2	3/16	1.600 ±.015	.210 ±.005	1	\$11.56
568-327U	1-3/4	2-1/8	3/16	1.725 ±.015	.210 ±.005	1	8.10
568-328U	1-7/8	2-1/4	3/16	1.850 ±.015	.210 ±.005	1	8.73
568-329U	2	2-3/8	3/16	1.975 ±.018	.210 ±.005	1	15.71
568-330U	2-1/8	2-1/2	3/16	2.100 ±.018	.210 ±.005	1	10.16
568-331U	2-1/4	2-5/8	3/16	2.225 ±.018	.210 ±.005	1	11.63
568-332U	2-3/8	2-3/4	3/16	2.350 ±.018	.210 ±.005	1	11.63
568-335U	2-3/4	3-1/8	3/16	2.725 ±.020	.210 ±.005	1	19.11
568-336U	2-7/8	3-1/4	3/16	2.850 ±.020	.210 ±.005	1	22.25
568-337U	3	3-3/8	3/16	2.975 ±.024	.210 ±.005	1	22.67
568-348U	4-3/8	4-3/4	3/16	4.350 ±.030	.210 ±.005	1	22.35

STYLE 580, SQUARE BUNA-N O-RINGS

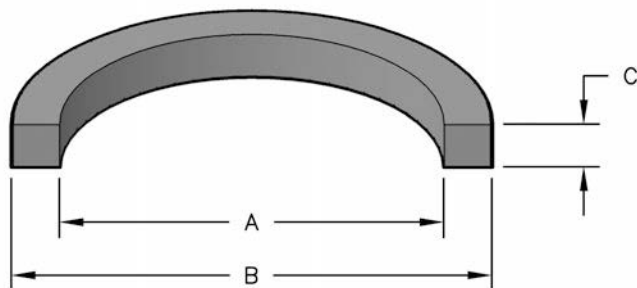

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLES ACCORDING TO DIAMETRAL CLEARANCE
SPEED	3 FT/SEC
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	INSIDE DIAMETER	C HEIGHT	CROSS SECTION	Package Quantity	List Price
1/16" C/S							
580-008	3/16	5/16	.176 ±.005	.066 ±.005	.066 ±.005	10	\$0.80
580-012	3/8	1/2	.364 ±.005	.066 ±.005	.066 ±.005	50	0.23
580-014	1/2	5/8	.489 ±.005	.066 ±.005	.066 ±.005	38	0.22
580-015	9/16	11/16	.551 ±.007	.066 ±.005	.066 ±.005	50	0.22
580-016	5/8	3/4	.614 ±.009	.066 ±.005	.066 ±.005	38	0.22
580-017	11/16	13/16	.676 ±.009	.066 ±.005	.066 ±.005	30	0.25
580-019	13/16	15/16	.801 ±.009	.066 ±.005	.066 ±.005	30	0.26
580-021	15/16	1-1/16	.926 ±.009	.066 ±.005	.066 ±.005	25	0.28
580-022	1	1-1/8	.989 ±.010	.066 ±.005	.066 ±.005	29	0.28
580-025	1-3/16	1-5/16	1.176 ±.011	.066 ±.005	.066 ±.005	25	0.32
580-026	1-1/4	1-3/8	1.239 ±.011	.066 ±.005	.066 ±.005	24	0.32
580-028	1-3/8	1-1/2	1.364 ±.013	.066 ±.005	.066 ±.005	25	0.32
580-029	1-1/2	1-5/8	1.489 ±.013	.066 ±.005	.066 ±.005	25	0.32
580-032	1-7/8	2	1.864 ±.015	.066 ±.005	.066 ±.005	15	0.60
580-033	2	2-1/8	1.989 ±.018	.066 ±.005	.066 ±.005	15	0.60
580-034	2-1/8	2-1/4	2.114 ±.018	.066 ±.005	.066 ±.005	15	0.60
580-035	2-1/4	2-3/8	2.239 ±.018	.066 ±.005	.066 ±.005	15	0.68
580-036	2-3/8	2-1/2	2.364 ±.018	.066 ±.005	.066 ±.005	13	0.68
580-037	2-1/2	2-5/8	2.489 ±.018	.066 ±.005	.066 ±.005	13	0.68
580-038	2-5/8	2-3/4	2.614 ±.020	.066 ±.005	.066 ±.005	13	0.68
580-039	2-3/4	2-7/8	2.739 ±.020	.066 ±.005	.066 ±.005	12	0.71
580-040	2-7/8	3	2.864 ±.020	.066 ±.005	.066 ±.005	12	0.77
580-041	3	3-1/8	2.989 ±.024	.066 ±.005	.066 ±.005	9	0.92
580-042	3-1/4	3-3/8	3.239 ±.024	.066 ±.005	.066 ±.005	9	0.92
580-043	3-1/2	3-5/8	3.489 ±.024	.066 ±.005	.066 ±.005	9	0.97
580-044	3-3/4	3-7/8	3.739 ±.027	.066 ±.005	.066 ±.005	9	0.97
580-045	4	4-1/8	3.989 ±.027	.066 ±.005	.066 ±.005	8	1.09
580-046	4-1/4	4-3/8	4.239 ±.030	.066 ±.005	.066 ±.005	7	1.21
580-047	4-1/2	4-5/8	4.489 ±.030	.066 ±.005	.066 ±.005	7	1.29
3/32" C/S							
580-110	3/8	9/16	.362 ±.005	.099 ±.005	.099 ±.005	23	\$0.32
580-113	9/16	3/4	.549 ±.005	.099 ±.005	.099 ±.005	13	0.63
580-115	11/16	7/8	.674 ±.009	.099 ±.005	.099 ±.005	14	0.63

STYLE 580, SQUARE BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	INSIDE DIAMETER	C HEIGHT	CROSS SECTION	Package Quantity	List Price
580-116	3/4	15/16	.737 ±.009	.099 ±.005	.099 ±.005	35	0.48
580-117	13/16	1	.799 ±.010	.099 ±.005	.099 ±.005	30	0.27
580-118	7/8	1-1/16	.862 ±.010	.099 ±.005	.099 ±.005	30	0.26
580-119	15/16	1-1/8	.924 ±.010	.099 ±.005	.099 ±.005	13	0.28
580-120	1	1-3/16	.987 ±.010	.099 ±.005	.099 ±.005	27	0.29
580-121	1-1/16	1-1/4	1.049 ±.010	.099 ±.005	.099 ±.005	25	0.29
580-122	1-1/8	1-5/16	1.112 ±.010	.099 ±.005	.099 ±.005	25	0.60
580-123	1-3/16	1-3/8	1.174 ±.012	.099 ±.005	.099 ±.005	12	0.71
580-124	1-1/4	1-7/16	1.237 ±.012	.099 ±.005	.099 ±.005	12	0.77
580-125	1-5/16	1-1/2	1.299 ±.012	.099 ±.005	.099 ±.005	12	0.77
580-125-90D	1-5/16	1-1/2	1.299 ±.012	.099 ±.005	.099 ±.005	5	2.06
580-126	1-3/8	1-9/16	1.362 ±.012	.099 ±.005	.099 ±.005	27	0.77
580-127	1-7/16	1-5/8	1.424 ±.012	.099 ±.005	.099 ±.005	12	0.77
580-128	1-1/2	1-11/16	1.487 ±.012	.099 ±.005	.099 ±.005	12	0.77
580-129	1-9/16	1-3/4	1.549 ±.015	.099 ±.005	.099 ±.005	12	0.77
580-130	1-5/8	1-13/16	1.612 ±.015	.099 ±.005	.099 ±.005	12	0.77
580-131	1-11/16	1-7/8	1.674 ±.015	.099 ±.005	.099 ±.005	12	0.77
580-132	1-3/4	1-15/16	1.737 ±.015	.099 ±.005	.099 ±.005	11	0.81
580-133	1-13/16	2	1.799 ±.015	.099 ±.005	.099 ±.005	11	0.81
580-134	1-7/8	2-1/16	1.862 ±.015	.099 ±.005	.099 ±.005	11	0.81
580-135	1-15/16	2-1/8	1.925 ±.017	.099 ±.005	.099 ±.005	11	0.81
580-136	2	2-3/16	1.987 ±.017	.099 ±.005	.099 ±.005	11	0.81
580-137	2-1/16	2-1/4	2.050 ±.017	.099 ±.005	.099 ±.005	11	0.81
580-138	2-1/8	2-5/16	2.112 ±.017	.099 ±.005	.099 ±.005	11	0.81
580-139	2-3/16	2-3/8	2.175 ±.017	.099 ±.005	.099 ±.005	11	0.81
580-140	2-1/4	2-7/16	2.237 ±.017	.099 ±.005	.099 ±.005	11	0.81
580-141	2-5/16	2-1/2	2.300 ±.020	.099 ±.005	.099 ±.005	11	0.81
580-142	2-3/8	2-9/16	2.362 ±.020	.099 ±.005	.099 ±.005	11	0.81
580-143	2-7/16	2-5/8	2.425 ±.020	.099 ±.005	.099 ±.005	11	0.81
580-144	2-1/2	2-11/16	2.487 ±.020	.099 ±.005	.099 ±.005	11	0.81
580-145	2-9/16	2-3/4	2.550 ±.020	.099 ±.005	.099 ±.005	11	0.81
580-146	2-5/8	2-13/16	2.612 ±.020	.099 ±.005	.099 ±.005	11	0.81
580-147	2-11/16	2-7/8	2.675 ±.022	.099 ±.005	.099 ±.005	10	0.85
580-148	2-3/4	2-15/16	2.737 ±.022	.099 ±.005	.099 ±.005	10	0.85
580-149	2-13/16	3	2.800 ±.022	.099 ±.005	.099 ±.005	10	0.85
580-150	2-7/8	3-1/16	2.862 ±.022	.099 ±.005	.099 ±.005	10	0.85
580-151	3	3-3/16	2.987 ±.024	.099 ±.005	.099 ±.005	10	0.87
580-152	3-1/4	3-7/16	3.237 ±.024	.099 ±.005	.099 ±.005	10	0.87
580-153	3-1/2	3-11/16	3.487 ±.024	.099 ±.005	.099 ±.005	9	0.92
580-154	3-3/4	3-15/16	3.737 ±.028	.099 ±.005	.099 ±.005	9	0.97
580-155	4	4-3/16	3.987 ±.028	.099 ±.005	.099 ±.005	7	1.21
580-156	4-1/4	4-7/16	4.237 ±.030	.099 ±.005	.099 ±.005	6	1.46
580-157	4-1/2	4-11/16	4.487 ±.030	.099 ±.005	.099 ±.005	5	1.79
580-158	4-3/4	4-15/16	4.737 ±.030	.099 ±.005	.099 ±.005	5	1.94
580-159	5	5-3/16	4.987 ±.035	.099 ±.005	.099 ±.005	4	2.12
580-160	5-1/4	5-7/16	5.237 ±.035	.099 ±.005	.099 ±.005	4	2.26
580-161	5-1/2	5-11/16	5.487 ±.035	.099 ±.005	.099 ±.005	4	2.53
580-163	6	6-3/16	5.987 ±.035	.099 ±.005	.099 ±.005	3	2.86
580-164	6-1/4	6-7/16	6.237 ±.040	.099 ±.005	.099 ±.005	3	2.95
580-170	7-3/4	7-15/16	7.737 ±.045	.099 ±.005	.099 ±.005	3	3.37



STYLE 580, SQUARE BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	INSIDE DIAMETER	C HEIGHT	CROSS SECTION	Package Quantity	List Price
1/8" C/S							
580-206	1/2	3/4	.484 ±.005	.134 ±.005	.134 ±.005	15	\$0.42
580-209	11/16	15/16	.671 ±.009	.134 ±.005	.134 ±.005	15	0.42
580-210	3/4	1	.734 ±.010	.134 ±.005	.134 ±.005	15	0.42
580-211	13/16	1-1/16	.796 ±.010	.134 ±.005	.134 ±.005	15	0.45
580-213	15/16	1-3/16	.921 ±.010	.134 ±.005	.134 ±.005	15	0.45
580-214	1	1-1/4	.984 ±.010	.134 ±.005	.134 ±.005	15	0.45
580-215	1-1/16	1-5/16	1.046 ±.010	.134 ±.005	.134 ±.005	15	0.45
580-216	1-1/8	1-3/8	1.109 ±.012	.134 ±.005	.134 ±.005	15	0.45
580-217	1-3/16	1-7/16	1.171 ±.012	.134 ±.005	.134 ±.005	15	0.56
580-218	1-1/4	1-1/2	1.234 ±.012	.134 ±.005	.134 ±.005	15	0.54
580-220	1-3/8	1-5/8	1.359 ±.012	.134 ±.005	.134 ±.005	15	0.54
580-221	1-7/16	1-11/16	1.421 ±.012	.134 ±.005	.134 ±.005	15	0.58
580-222	1-1/2	1-3/4	1.484 ±.015	.134 ±.005	.134 ±.005	15	0.58
580-223	1-5/8	1-7/8	1.609 ±.015	.134 ±.005	.134 ±.005	15	0.58
580-224	1-3/4	2	1.734 ±.015	.134 ±.005	.134 ±.005	15	0.58
580-225	1-7/8	2-1/8	1.859 ±.018	.134 ±.005	.134 ±.005	15	0.58
580-226	2	2-1/4	1.984 ±.018	.134 ±.005	.134 ±.005	15	0.60
580-227	2-1/8	2-3/8	2.109 ±.018	.134 ±.005	.134 ±.005	15	0.60
580-229	2-3/8	2-5/8	2.359 ±.020	.134 ±.005	.134 ±.005	15	0.60
580-230	2-1/2	2-3/4	2.484 ±.020	.134 ±.005	.134 ±.005	15	0.60
580-231	2-5/8	2-7/8	2.609 ±.020	.134 ±.005	.134 ±.005	15	0.60
580-232	2-3/4	3	2.734 ±.024	.134 ±.005	.134 ±.005	15	0.60
580-233	2-7/8	3-1/8	2.859 ±.024	.134 ±.005	.134 ±.005	15	0.60
580-234	3	3-1/4	2.984 ±.024	.134 ±.005	.134 ±.005	14	0.63
580-235	3-1/8	3-3/8	3.109 ±.024	.134 ±.005	.134 ±.005	13	0.68
580-236	3-1/4	3-1/2	3.234 ±.024	.134 ±.005	.134 ±.005	12	0.71
580-237	3-3/8	3-5/8	3.359 ±.024	.134 ±.005	.134 ±.005	12	0.77
580-238	3-1/2	3-3/4	3.484 ±.024	.134 ±.005	.134 ±.005	12	0.77
580-239	3-5/8	3-7/8	3.609 ±.028	.134 ±.005	.134 ±.005	10	0.85
580-240	3-3/4	4	3.734 ±.028	.134 ±.005	.134 ±.005	10	0.87
580-241	3-7/8	4-1/8	3.859 ±.028	.134 ±.005	.134 ±.005	10	0.87
580-242	4	4-1/4	3.984 ±.028	.134 ±.005	.134 ±.005	10	0.87
580-243	4-1/8	4-3/8	4.109 ±.028	.134 ±.005	.134 ±.005	9	0.92
580-244	4-1/4	4-1/2	4.234 ±.030	.134 ±.005	.134 ±.005	9	0.92
580-245	4-3/8	4-5/8	4.359 ±.030	.134 ±.005	.134 ±.005	8	1.09
580-246	4-1/2	4-3/4	4.484 ±.030	.134 ±.005	.134 ±.005	7	1.29
580-247	4-5/8	4-7/8	4.609 ±.030	.134 ±.005	.134 ±.005	6	1.64
580-248	4-3/4	5	4.734 ±.030	.134 ±.005	.134 ±.005	5	1.66
580-249	4-7/8	5-1/8	4.859 ±.035	.134 ±.005	.134 ±.005	5	1.74
580-250	5	5-1/4	4.984 ±.035	.134 ±.005	.134 ±.005	5	1.85
580-251	5-1/8	5-3/8	5.109 ±.035	.134 ±.005	.134 ±.005	5	1.88
580-252	5-1/4	5-1/2	5.234 ±.035	.134 ±.005	.134 ±.005	5	2.05
580-253	5-3/8	5-5/8	5.359 ±.035	.134 ±.005	.134 ±.005	4	2.08
580-254	5-1/2	5-3/4	5.484 ±.035	.134 ±.005	.134 ±.005	4	2.12
580-255	5-5/8	5-7/8	5.609 ±.035	.134 ±.005	.134 ±.005	4	2.17
580-256	5-3/4	6	5.734 ±.035	.134 ±.005	.134 ±.005	4	2.30
580-257	5-7/8	6-1/8	5.859 ±.035	.134 ±.005	.134 ±.005	4	2.37
580-258	6	6-1/4	5.984 ±.035	.134 ±.005	.134 ±.005	4	2.53
580-259	6-1/4	6-1/2	6.234 ±.040	.134 ±.005	.134 ±.005	4	2.73



STYLE 580, SQUARE BUNA-N O-RINGS

Part Number	A Nom. ID	B Nom. OD	INSIDE DIAMETER	C HEIGHT	CROSS SECTION	Package Quantity	List Price
580-260	6-1/2	6-3/4	6.484 ±.040	.134 ±.005	.134 ±.005	3	2.83
580-261	6-3/4	7	6.734 ±.040	.134 ±.005	.134 ±.005	3	2.83
580-262	7	7-1/4	6.984 ±.040	.134 ±.005	.134 ±.005	3	2.86
580-263	7-1/4	7-1/2	7.234 ±.045	.134 ±.005	.134 ±.005	3	3.02
580-264	7-1/2	7-3/4	7.484 ±.045	.134 ±.005	.134 ±.005	3	3.06
580-265	7-3/4	8	7.734 ±.045	.134 ±.005	.134 ±.005	3	3.16
580-266	8	8-1/4	7.984 ±.045	.134 ±.005	.134 ±.005	3	3.36
580-267	8-1/4	8-1/2	8.234 ±.050	.134 ±.005	.134 ±.005	3	3.53
580-268	8-1/2	8-3/4	8.484 ±.050	.134 ±.005	.134 ±.005	3	3.53
580-269	8-3/4	9	8.734 ±.050	.134 ±.005	.134 ±.005	3	7.77
580-271	9-1/4	9-1/2	9.234 ±.055	.134 ±.005	.134 ±.005	3	16.60
580-273	9-3/4	10	9.734 ±.055	.134 ±.005	.134 ±.005	3	24.26
580-274	10	10-1/4	9.984 ±.055	.134 ±.005	.134 ±.005	3	8.31
580-278	12	12-1/4	11.984 ±.065	.134 ±.005	.134 ±.005	1	27.97
3/16" C/S							
580-322	1-1/4	1-5/8	1.225 ±.012	.203 ±.006	.203 ±.006	5	\$0.83
580-324	1-3/8	1-3/4	1.350 ±.012	.203 ±.006	.203 ±.006	8	0.98
580-325	1-1/2	1-7/8	1.475 ±.015	.203 ±.006	.203 ±.006	15	0.98
580-326	1-5/8	2	1.600 ±.015	.203 ±.006	.203 ±.006	15	0.98
580-327	1-3/4	2-1/8	1.725 ±.015	.203 ±.006	.203 ±.006	35	0.50
580-328	1-7/8	2-1/4	1.850 ±.015	.203 ±.006	.203 ±.006	15	0.98
580-329	2	2-3/8	1.975 ±.018	.203 ±.006	.203 ±.006	13	0.98
580-330	2-1/8	2-1/2	2.100 ±.018	.203 ±.006	.203 ±.006	13	1.12
580-331	2-1/4	2-5/8	2.225 ±.018	.203 ±.006	.203 ±.006	13	1.12
580-332	2-3/8	2-3/4	2.350 ±.018	.203 ±.006	.203 ±.006	13	1.12
580-333	2-1/2	2-7/8	2.475 ±.020	.203 ±.006	.203 ±.006	13	1.12
580-334	2-5/8	3	2.600 ±.020	.203 ±.006	.203 ±.006	13	1.29
580-335	2-3/4	3-1/8	2.725 ±.020	.203 ±.006	.203 ±.006	12	1.29
580-336	2-7/8	3-1/4	2.850 ±.020	.203 ±.006	.203 ±.006	11	1.29
580-337	3	3-3/8	2.975 ±.024	.203 ±.006	.203 ±.006	10	1.29
580-338	3-1/8	3-1/2	3.100 ±.024	.203 ±.006	.203 ±.006	10	1.39
580-339	3-1/4	3-5/8	3.225 ±.024	.203 ±.006	.203 ±.006	10	1.39
580-340	3-3/8	3-3/4	3.350 ±.024	.203 ±.006	.203 ±.006	10	1.39
580-341	3-1/2	3-7/8	3.475 ±.024	.203 ±.006	.203 ±.006	9	1.39
580-342	3-5/8	4	3.600 ±.028	.203 ±.006	.203 ±.006	9	1.48
580-343	3-3/4	4-1/8	3.725 ±.028	.203 ±.006	.203 ±.006	8	1.48
580-344	3-7/8	4-1/4	3.850 ±.028	.203 ±.006	.203 ±.006	7	1.48
580-345	4	4-3/8	3.975 ±.028	.203 ±.006	.203 ±.006	7	1.48
580-346	4-1/8	4-1/2	4.100 ±.028	.203 ±.006	.203 ±.006	7	1.64
580-347	4-1/4	4-5/8	4.225 ±.030	.203 ±.006	.203 ±.006	7	1.74
580-348	4-3/8	4-3/4	4.350 ±.030	.203 ±.006	.203 ±.006	7	1.74
580-349	4-1/2	4-7/8	4.475 ±.030	.203 ±.006	.203 ±.006	6	1.74
580-350	4-5/8	5	4.600 ±.030	.203 ±.006	.203 ±.006	6	1.94
580-351	4-3/4	5-1/8	4.725 ±.030	.203 ±.006	.203 ±.006	6	1.94
580-352	4-7/8	5-1/4	4.850 ±.030	.203 ±.006	.203 ±.006	6	1.94
580-353	5	5-3/8	4.975 ±.037	.203 ±.006	.203 ±.006	5	2.32
580-354	5-1/8	5-1/2	5.100 ±.037	.203 ±.006	.203 ±.006	4	2.32
580-355	5-1/4	5-5/8	5.225 ±.037	.203 ±.006	.203 ±.006	4	2.32
580-356	5-3/8	5-3/4	5.350 ±.037	.203 ±.006	.203 ±.006	4	2.32
580-357	5-1/2	5-7/8	5.475 ±.037	.203 ±.006	.203 ±.006	4	2.32



STYLE 580, SQUARE BUNA-N O-RINGS


Part Number	A Nom. ID	B Nom. OD	INSIDE DIAMETER	C HEIGHT	CROSS SECTION	Package Quantity	List Price
580-358	5-5/8	6	5.600 ±.037	.203 ±.006	.203 ±.006	4	2.32
580-366	7-1/4	7-5/8	7.225 ±.045	.203 ±.006	.203 ±.006	4	2.77
1/4" C/S							
580-414	3-1/8	3-5/8	3.100 ±.024	.266 ±.007	.266 ±.007	2	\$5.22
580-423	4-1/4	4-3/4	4.225 ±.030	.266 ±.007	.266 ±.007	2	4.92
580-425	4-1/2	5	4.475 ±.033	.266 ±.007	.266 ±.007	3	2.78
580-426	4-5/8	5-1/8	4.600 ±.033	.266 ±.007	.266 ±.007	3	2.78
580-427	4-3/4	5-1/4	4.725 ±.033	.266 ±.007	.266 ±.007	3	2.78
580-428	4-7/8	5-3/8	4.850 ±.033	.266 ±.007	.266 ±.007	3	2.78
580-429	5	5-1/2	4.975 ±.037	.266 ±.007	.266 ±.007	3	2.78
580-430	5-1/8	5-5/8	5.100 ±.037	.266 ±.007	.266 ±.007	3	2.78
580-431	5-1/4	5-3/4	5.225 ±.037	.266 ±.007	.266 ±.007	3	2.78
580-433	5-1/2	6	5.475 ±.037	.266 ±.007	.266 ±.007	3	2.83
580-434	5-5/8	6-1/8	5.600 ±.037	.266 ±.007	.266 ±.007	3	2.83
580-435	5-3/4	6-1/4	5.725 ±.037	.266 ±.007	.266 ±.007	3	3.02
580-436	5-7/8	6-3/8	5.850 ±.037	.266 ±.007	.266 ±.007	3	3.43
580-437	6	6-1/2	5.975 ±.037	.266 ±.007	.266 ±.007	3	3.41
580-438	6-1/4	6-3/4	6.225 ±.040	.266 ±.007	.266 ±.007	3	3.54
580-439	6-1/2	7	6.475 ±.040	.266 ±.007	.266 ±.007	3	3.76
580-440	6-3/4	7-1/4	6.725 ±.040	.266 ±.007	.266 ±.007	3	4.01
580-441	7	7-1/2	6.975 ±.040	.266 ±.007	.266 ±.007	2	4.26
580-442	7-1/4	7-3/4	7.225 ±.045	.266 ±.007	.266 ±.007	2	4.36
580-443	7-1/2	8	7.475 ±.045	.266 ±.007	.266 ±.007	2	4.48
580-444	7-3/4	8-1/4	7.725 ±.045	.266 ±.007	.266 ±.007	2	4.57
580-445	8	8-1/2	7.975 ±.045	.266 ±.007	.266 ±.007	2	4.57
580-446	8-1/2	9	8.475 ±.055	.266 ±.007	.266 ±.007	2	4.96
580-447	9	9-1/2	8.975 ±.055	.266 ±.007	.266 ±.007	2	5.49
580-448	9-1/2	10	9.475 ±.055	.266 ±.007	.266 ±.007	2	6.50
580-449	10	10-1/2	9.975 ±.055	.266 ±.007	.266 ±.007	2	15.83
580-450	10-1/2	11	10.475 ±.060	.266 ±.007	.266 ±.007	1	28.62
580-451	11	11-1/2	10.975 ±.060	.266 ±.007	.266 ±.007	1	35.54

STYLE QR, BUNA-N QUAD® RINGS



Quad® Rings provide improved stability and lubricity over conventional o-rings, reducing the tendency to spiral in the groove. They interchange standard o-rings in a variety of static and dynamic sealing applications including rotary, reciprocating or oscillating motion.

NOTE: Last three digits of part number corresponds to standard o-ring dash numbers (568-218 = QR-4218)

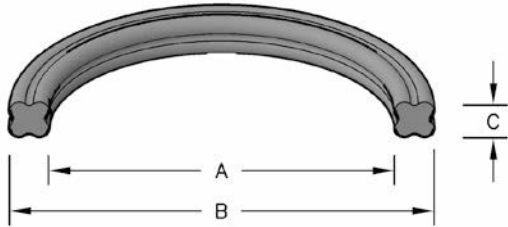

SEAL INFORMATION	
MATERIAL	BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIABLE ACCORDING TO DIAMETRAL CLEARANCE
SPEED	3 FT/SEC
PART NUMBER	(Prefix) - (Dash No.)

V = FLUOROCARBON

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
1/16" C/S								
QR-4004	5/64	13/64	1/16	-004	.070 ±.005	.070 ±.003	6	\$1.29
QR-4005	3/32	7/32	1/16	-005	.101 ±.005	.070 ±.003	6	1.29
QR-4006	1/8	1/4	1/16	-006	.114 ±.005	.070 ±.003	6	1.29
QR-4007	5/32	9/32	1/16	-007	.145 ±.005	.070 ±.003	6	1.29
QR-4008	3/16	5/16	1/16	-008	.176 ±.005	.070 ±.003	6	1.29
QR-4009	7/32	11/32	1/16	-009	.208 ±.005	.070 ±.003	6	1.29
QR-4010	1/4	3/8	1/16	-010	.239 ±.005	.070 ±.003	6	1.29
QR-4011	5/16	7/16	1/16	-011	.301 ±.005	.070 ±.003	6	1.29
QR-4012	3/8	1/2	1/16	-012	.364 ±.005	.070 ±.003	6	1.29
QR-4013	7/16	9/16	1/16	-013	.426 ±.005	.070 ±.003	6	1.29
QR-4014	1/2	5/8	1/16	-014	.489 ±.005	.070 ±.003	6	1.29
QR-4015	9/16	11/16	1/16	-015	.551 ±.007	.070 ±.003	6	1.29
QR-4016	5/8	3/4	1/16	-016	.614 ±.009	.070 ±.003	5	1.64
QR-4017	11/16	13/16	1/16	-017	.676 ±.009	.070 ±.003	5	1.64
QR-4018	3/4	7/8	1/16	-018	.739 ±.009	.070 ±.003	5	1.64
QR-4019	13/16	15/16	1/16	-019	.801 ±.009	.070 ±.003	5	1.64
QR-4020	7/8	1	1/16	-020	.864 ±.009	.070 ±.003	5	1.64
QR-4021	15/16	1-1/16	1/16	-021	.926 ±.009	.070 ±.003	5	1.64
QR-4022	1	1-1/8	1/16	-022	.989 ±.010	.070 ±.003	4	2.00
QR-4023	1-1/16	1-3/16	1/16	-023	1.051 ±.010	.070 ±.003	4	2.00
QR-4024	1-1/8	1-1/4	1/16	-024	1.114 ±.010	.070 ±.003	4	2.00
QR-4025	1-3/16	1-5/16	1/16	-025	1.176 ±.011	.070 ±.003	3	2.30
QR-4026	1-1/4	1-3/8	1/16	-026	1.239 ±.011	.070 ±.003	3	2.30
QR-4027	1-5/16	1-7/16	1/16	-027	1.301 ±.011	.070 ±.003	3	2.40
QR-4028	1-3/8	1-1/2	1/16	-028	1.364 ±.013	.070 ±.003	3	2.48
QR-4029	1-1/2	1-5/8	1/16	-029	1.489 ±.013	.070 ±.003	3	2.48
QR-4030	1-5/8	1-3/4	1/16	-030	1.614 ±.013	.070 ±.003	3	2.78
QR-4031	1-3/4	1-7/8	1/16	-031	1.739 ±.015	.070 ±.003	3	2.69
QR-4032	1-7/8	2	1/16	-032	1.864 ±.015	.070 ±.003	2	2.89
QR-4033	2	2-1/8	1/16	-033	1.989 ±.018	.070 ±.003	3	2.14
QR-4034	2-1/8	2-1/4	1/16	-034	2.114 ±.018	.070 ±.003	3	2.21
QR-4035	2-1/4	2-3/8	1/16	-035	2.239 ±.018	.070 ±.003	3	2.28
QR-4036	2-3/8	2-1/2	1/16	-036	2.364 ±.018	.070 ±.003	3	3.93

STYLE QR, BUNA-N QUAD® RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
QR-4037	2-1/2	2-5/8	1/16	-037	2.489 ±.018	.070 ±.003	2	2.87
QR-4038	2-5/8	2-3/4	1/16	-038	2.614 ±.020	.070 ±.003	2	3.61
QR-4039	2-3/4	2-7/8	1/16	-039	2.739 ±.020	.070 ±.003	2	3.24
QR-4040	2-7/8	3	1/16	-040	2.864 ±.020	.070 ±.003	2	3.31
QR-4041	3	3-1/8	1/16	-041	2.989 ±.024	.070 ±.003	2	3.39
QR-4042	3-1/4	3-3/8	1/16	-042	3.239 ±.024	.070 ±.003	2	3.53
QR-4043	3-1/2	3-5/8	1/16	-043	3.489 ±.024	.070 ±.003	2	3.93
QR-4044	3-3/4	3-7/8	1/16	-044	3.739 ±.027	.070 ±.003	2	13.47
QR-4045	4	4-1/8	1/16	-045	3.989 ±.027	.070 ±.003	2	3.98
QR-4046	4-1/4	4-3/8	1/16	-046	4.239 ±.030	.070 ±.003	2	4.02
QR-4047	4-1/2	4-5/8	1/16	-047	4.489 ±.030	.070 ±.003	2	4.87
QR-4048	4-3/4	4-7/8	1/16	-048	4.739 ±.030	.070 ±.003	2	5.02
QR-4050	5-1/4	5-3/8	1/16	-050	5.239 ±.037	.070 ±.003	2	6.93
3/32" C/S								
QR-4108	1/4	7/16	3/32	-108	.237 ±.005	.103 ±.003	5	\$1.28
QR-4109	5/16	1/2	3/32	-109	.299 ±.005	.103 ±.003	5	1.49
QR-4110	3/8	9/16	3/32	-110	.362 ±.005	.103 ±.003	5	1.49
QR-4111	7/16	5/8	3/32	-111	.424 ±.005	.103 ±.003	5	1.49
QR-4112	1/2	11/16	3/32	-112	.487 ±.005	.103 ±.003	5	1.49
QR-4113	9/16	3/4	3/32	-113	.549 ±.005	.103 ±.003	5	1.49
QR-4113V	9/16	3/4	3/32	-113	.549 ±.005	.103 ±.003	1	5.10
QR-4114	5/8	13/16	3/32	-114	.612 ±.009	.103 ±.003	5	1.49
QR-4115	11/16	7/8	3/32	-115	.674 ±.009	.103 ±.003	5	1.49
QR-4116	3/4	15/16	3/32	-116	.737 ±.009	.103 ±.003	5	1.64
QR-4117	13/16	1	3/32	-117	.799 ±.010	.103 ±.003	5	1.64
QR-4118	7/8	1-1/16	3/32	-118	.862 ±.010	.103 ±.003	5	1.79
QR-4119	15/16	1-1/8	3/32	-119	.924 ±.010	.103 ±.003	5	1.79
QR-4120	1	1-3/16	3/32	-120	.987 ±.010	.103 ±.003	5	1.79
QR-4121	1-1/16	1-1/4	3/32	-121	1.049 ±.010	.103 ±.003	5	1.79
QR-4122	1-1/8	1-5/16	3/32	-122	1.112 ±.010	.103 ±.003	5	1.79
QR-4123	1-3/16	1-3/8	3/32	-123	1.174 ±.012	.103 ±.003	5	1.79
QR-4124	1-1/4	1-7/16	3/32	-124	1.237 ±.012	.103 ±.003	5	1.79
QR-4125	1-5/16	1-1/2	3/32	-125	1.299 ±.012	.103 ±.003	4	1.87
QR-4126	1-3/8	1-9/16	3/32	-126	1.362 ±.012	.103 ±.003	4	1.87
QR-4127	1-7/16	1-5/8	3/32	-127	1.424 ±.012	.103 ±.003	4	1.87
QR-4128	1-1/2	1-11/16	3/32	-128	1.487 ±.012	.103 ±.003	4	1.87
QR-4129	1-9/16	1-3/4	3/32	-129	1.549 ±.015	.103 ±.003	4	1.87
QR-4130	1-5/8	1-13/16	3/32	-130	1.612 ±.015	.103 ±.003	4	1.87
QR-4131	1-11/16	1-7/8	3/32	-131	1.674 ±.015	.103 ±.003	4	2.18
QR-4132	1-3/4	1-15/16	3/32	-132	1.737 ±.015	.103 ±.003	4	2.18
QR-4133	1-13/16	2	3/32	-133	1.799 ±.015	.103 ±.003	4	2.18
QR-4134	1-7/8	2-1/16	3/32	-134	1.862 ±.015	.103 ±.003	4	2.18
QR-4135	1-15/16	2-1/8	3/32	-135	1.925 ±.017	.103 ±.003	3	2.97
QR-4136	2	2-3/16	3/32	-136	1.987 ±.017	.103 ±.003	3	3.05
QR-4137	2-1/16	2-1/4	3/32	-137	2.050 ±.017	.103 ±.003	3	3.16
QR-4138	2-1/8	2-5/16	3/32	-138	2.112 ±.017	.103 ±.003	3	3.43
QR-4139	2-3/16	2-3/8	3/32	-139	2.175 ±.017	.103 ±.003	3	3.43
QR-4140	2-1/4	2-7/16	3/32	-140	2.237 ±.017	.103 ±.003	3	3.60
QR-4141	2-5/16	2-1/2	3/32	-141	2.300 ±.020	.103 ±.003	3	3.74
QR-4142	2-3/8	2-9/16	3/32	-142	2.362 ±.020	.103 ±.003	3	3.90

STYLE QR, BUNA-N QUAD® RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
QR-4143	2-7/16	2-5/8	3/32	-143	2.425 ±.020	.103 ±.003	2	3.21
QR-4144	2-1/2	2-11/16	3/32	-144	2.487 ±.020	.103 ±.003	2	4.06
QR-4145	2-9/16	2-3/4	3/32	-145	2.550 ±.020	.103 ±.003	2	4.11
QR-4146	2-5/8	2-13/16	3/32	-146	2.612 ±.020	.103 ±.003	2	4.11
QR-4147	2-11/16	2-7/8	3/32	-147	2.675 ±.022	.103 ±.003	2	4.17
QR-4148	2-3/4	2-15/16	3/32	-148	2.737 ±.022	.103 ±.003	2	4.18
QR-4149	2-13/16	3	3/32	-149	2.800 ±.022	.103 ±.003	2	4.21
QR-4151	3	3-3/16	3/32	-151	2.987 ±.024	.103 ±.003	2	4.31
QR-4152	3-1/4	3-7/16	3/32	-152	3.237 ±.024	.103 ±.003	2	4.35
QR-4153	3-1/2	3-11/16	3/32	-153	3.487 ±.024	.103 ±.003	2	4.57
QR-4154	3-3/4	3-15/16	3/32	-154	3.737 ±.028	.103 ±.003	2	4.42
QR-4156	4-1/4	4-7/16	3/32	-156	4.237 ±.030	.103 ±.003	2	4.42
QR-4157	4-1/2	4-11/16	3/32	-157	4.487 ±.030	.103 ±.003	2	4.50
QR-4158	4-3/4	4-15/16	3/32	-158	4.737 ±.030	.103 ±.003	2	5.31
QR-4159	5	5-3/16	3/32	-159	4.987 ±.035	.103 ±.003	2	5.46
QR-4161	5-1/2	5-11/16	3/32	-161	5.487 ±.035	.103 ±.003	2	5.63
QR-4164	6-1/4	6-7/16	3/32	-164	6.237 ±.040	.103 ±.003	1	4.23
1/8" C/S								
QR-4202	1/4	1/2	1/8	-202	.234 ±.005	.139 ±.004	5	\$1.60
QR-4204	3/8	5/8	1/8	-204	.359 ±.005	.139 ±.004	5	1.64
QR-4205	7/16	11/16	1/8	-205	.421 ±.005	.139 ±.004	5	1.64
QR-4206	1/2	3/4	1/8	-206	.484 ±.005	.139 ±.004	5	1.64
QR-4207	9/16	13/16	1/8	-207	.546 ±.007	.139 ±.004	5	1.64
QR-4208	5/8	7/8	1/8	-208	.609 ±.009	.139 ±.004	5	1.64
QR-4209	11/16	15/16	1/8	-209	.671 ±.009	.139 ±.004	5	1.64
QR-4210	3/4	1	1/8	-210	.734 ±.010	.139 ±.004	5	1.64
QR-4211	13/16	1-1/16	1/8	-211	.796 ±.010	.139 ±.004	5	1.64
QR-4212	7/8	1-1/8	1/8	-212	.859 ±.010	.139 ±.004	5	1.64
QR-4213	15/16	1-3/16	1/8	-213	.921 ±.010	.139 ±.004	5	1.65
QR-4214	1	1-1/4	1/8	-214	.984 ±.010	.139 ±.004	5	1.79
QR-4215	1-1/16	1-5/16	1/8	-215	1.046 ±.010	.139 ±.004	5	1.79
QR-4216	1-1/8	1-3/8	1/8	-216	1.109 ±.012	.139 ±.004	4	1.96
QR-4217	1-3/16	1-7/16	1/8	-217	1.171 ±.012	.139 ±.004	4	1.96
QR-4218	1-1/4	1-1/2	1/8	-218	1.234 ±.012	.139 ±.004	4	1.96
QR-4219	1-5/16	1-9/16	1/8	-219	1.296 ±.012	.139 ±.004	4	1.96
QR-4220	1-3/8	1-5/8	1/8	-220	1.359 ±.012	.139 ±.004	4	2.18
QR-4221	1-7/16	1-11/16	1/8	-221	1.421 ±.012	.139 ±.004	4	2.18
QR-4222	1-1/2	1-3/4	1/8	-222	1.484 ±.015	.139 ±.004	4	2.18
QR-4223	1-5/8	1-7/8	1/8	-223	1.609 ±.015	.139 ±.004	3	2.61
QR-4224	1-3/4	2	1/8	-224	1.734 ±.015	.139 ±.004	3	2.61
QR-4225	1-7/8	2-1/8	1/8	-225	1.859 ±.018	.139 ±.004	3	2.61
QR-4226	2	2-1/4	1/8	-226	1.984 ±.018	.139 ±.004	3	2.61
QR-4227	2-1/8	2-3/8	1/8	-227	2.109 ±.018	.139 ±.004	3	2.61
QR-4228	2-1/4	2-1/2	1/8	-228	2.234 ±.020	.139 ±.004	3	2.95
QR-4229	2-3/8	2-5/8	1/8	-229	2.359 ±.020	.139 ±.004	3	2.95
QR-4230	2-1/2	2-3/4	1/8	-230	2.484 ±.020	.139 ±.004	3	3.04
QR-4231	2-5/8	2-7/8	1/8	-231	2.609 ±.020	.139 ±.004	3	3.04
QR-4232	2-3/4	3	1/8	-232	2.734 ±.024	.139 ±.004	3	3.04
QR-4233	2-7/8	3-1/8	1/8	-233	2.859 ±.024	.139 ±.004	3	3.04
QR-4234	3	3-1/4	1/8	-234	2.984 ±.024	.139 ±.004	3	3.04

STYLE QR, BUNA-N QUAD® RINGS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
QR-4235	3-1/8	3-3/8	1/8	-235	3.109 ±.024	.139 ±.004	3	3.04
QR-4236	3-1/4	3-1/2	1/8	-236	3.234 ±.024	.139 ±.004	3	3.04
QR-4237	3-3/8	3-5/8	1/8	-237	3.359 ±.024	.139 ±.004	3	3.04
QR-4238	3-1/2	3-3/4	1/8	-238	3.484 ±.024	.139 ±.004	2	5.32
QR-4239	3-5/8	3-7/8	1/8	-239	3.609 ±.028	.139 ±.004	2	5.32
QR-4240	3-3/4	4	1/8	-240	3.734 ±.028	.139 ±.004	2	5.32
QR-4241	3-7/8	4-1/8	1/8	-241	3.859 ±.028	.139 ±.004	2	5.32
QR-4242	4	4-1/4	1/8	-242	3.984 ±.028	.139 ±.004	2	5.32
QR-4243	4-1/8	4-3/8	1/8	-243	4.109 ±.028	.139 ±.004	2	5.45
QR-4244	4-1/4	4-1/2	1/8	-244	4.234 ±.030	.139 ±.004	2	5.45
QR-4245	4-3/8	4-5/8	1/8	-245	4.359 ±.030	.139 ±.004	2	5.45
QR-4246	4-1/2	4-3/4	1/8	-246	4.484 ±.030	.139 ±.004	2	5.45
QR-4247	4-5/8	4-7/8	1/8	-247	4.609 ±.030	.139 ±.004	2	5.45
QR-4248	4-3/4	5	1/8	-248	4.734 ±.030	.139 ±.004	2	5.73
QR-4249	4-7/8	5-1/8	1/8	-249	4.859 ±.035	.139 ±.004	2	5.73
QR-4250	5	5-1/4	1/8	-250	4.984 ±.035	.139 ±.004	2	5.73
QR-4251	5-1/8	5-3/8	1/8	-251	5.109 ±.035	.139 ±.004	2	5.73
QR-4252	5-1/4	5-1/2	1/8	-252	5.234 ±.035	.139 ±.004	1	8.11
QR-4253	5-3/8	5-5/8	1/8	-253	5.359 ±.035	.139 ±.004	1	19.41
QR-4254	5-1/2	5-3/4	1/8	-254	5.484 ±.035	.139 ±.004	1	8.85
QR-4255	5-5/8	5-7/8	1/8	-255	5.609 ±.035	.139 ±.004	1	9.55
QR-4256	5-3/4	6	1/8	-256	5.734 ±.035	.139 ±.004	1	9.55
QR-4257	5-7/8	6-1/8	1/8	-257	5.859 ±.035	.139 ±.004	1	10.93
QR-4258	6	6-1/4	1/8	-258	5.984 ±.035	.139 ±.004	1	10.93
QR-4259	6-1/4	6-1/2	1/8	-259	6.234 ±.040	.139 ±.004	1	11.32
QR-4260	6-1/2	6-3/4	1/8	-260	6.484 ±.040	.139 ±.004	1	10.48
QR-4261	6-3/4	7	1/8	-261	6.734 ±.040	.139 ±.004	1	13.24
QR-4263	7-1/4	7-1/2	1/8	-263	7.234 ±.045	.139 ±.004	1	13.24
QR-4265	7-3/4	8	1/8	-265	7.734 ±.045	.139 ±.004	1	13.24
QR-4266	8	8-1/4	1/8	-266	7.984 ±.045	.139 ±.004	1	14.37
QR-4268	8-1/2	8-3/4	1/8	-268	8.484 ±.050	.139 ±.004	1	21.94
QR-4278	12	12-1/4	1/8	-278	11.984 ±.065	.139 ±.004	1	38.30
3/16" C/S								
QR-4314	3/4	1-1/8	3/16	-314	.725 ±.010	.210 ±.005	3	\$2.32
QR-4316	7/8	1-1/4	3/16	-316	.850 ±.010	.210 ±.005	3	2.35
QR-4318	1	1-3/8	3/16	-318	.975 ±.010	.210 ±.005	3	2.35
QR-4319	1-1/16	1-7/16	3/16	-319	1.037 ±.010	.210 ±.005	3	4.80
QR-4320	1-1/8	1-1/2	3/16	-320	1.100 ±.012	.210 ±.005	3	2.59
QR-4321	1-3/16	1-9/16	3/16	-321	1.162 ±.012	.210 ±.005	3	2.59
QR-4322	1-1/4	1-5/8	3/16	-322	1.225 ±.012	.210 ±.005	3	2.66
QR-4323	1-5/16	1-11/16	3/16	-323	1.287 ±.012	.210 ±.005	3	2.66
QR-4324	1-3/8	1-3/4	3/16	-324	1.350 ±.012	.210 ±.005	3	2.66
QR-4325	1-1/2	1-7/8	3/16	-325	1.475 ±.015	.210 ±.005	3	2.86
QR-4326	1-5/8	2	3/16	-326	1.600 ±.015	.210 ±.005	3	2.86
QR-4327	1-3/4	2-1/8	3/16	-327	1.725 ±.015	.210 ±.005	3	2.86
QR-4328	1-7/8	2-1/4	3/16	-328	1.850 ±.015	.210 ±.005	3	3.21
QR-4329	2	2-3/8	3/16	-329	1.975 ±.018	.210 ±.005	3	3.21
QR-4330	2-1/8	2-1/2	3/16	-330	2.100 ±.018	.210 ±.005	3	3.21
QR-4331	2-1/4	2-5/8	3/16	-331	2.225 ±.018	.210 ±.005	3	3.31
QR-4332	2-3/8	2-3/4	3/16	-332	2.350 ±.018	.210 ±.005	3	3.31

STYLE QR, BUNA-N QUAD® RINGS



Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
QR-4333	2-1/2	2-7/8	3/16	-333	2.475 ±.020	.210 ±.005	3	3.63
QR-4334	2-5/8	3	3/16	-334	2.600 ±.020	.210 ±.005	3	3.63
QR-4335	2-3/4	3-1/8	3/16	-335	2.725 ±.020	.210 ±.005	2	3.96
QR-4336	2-7/8	3-1/4	3/16	-336	2.850 ±.020	.210 ±.005	2	3.96
QR-4337	3	3-3/8	3/16	-337	2.975 ±.024	.210 ±.005	2	4.14
QR-4338	3-1/8	3-1/2	3/16	-338	3.100 ±.024	.210 ±.005	2	4.14
QR-4339	3-1/4	3-5/8	3/16	-339	3.225 ±.024	.210 ±.005	2	4.14
QR-4340	3-3/8	3-3/4	3/16	-340	3.350 ±.024	.210 ±.005	2	5.63
QR-4341	3-1/2	3-7/8	3/16	-341	3.475 ±.024	.210 ±.005	2	5.97
QR-4342	3-5/8	4	3/16	-342	3.600 ±.028	.210 ±.005	2	6.29
QR-4343	3-3/4	4-1/8	3/16	-343	3.725 ±.028	.210 ±.005	2	6.29
QR-4344	3-7/8	4-1/4	3/16	-344	3.850 ±.028	.210 ±.005	1	7.21
QR-4345	4	4-3/8	3/16	-345	3.975 ±.028	.210 ±.005	1	8.28
QR-4346	4-1/8	4-1/2	3/16	-346	4.100 ±.028	.210 ±.005	1	9.56
QR-4347	4-1/4	4-5/8	3/16	-347	4.225 ±.030	.210 ±.005	1	9.56
QR-4348	4-3/8	4-3/4	3/16	-348	4.350 ±.030	.210 ±.005	1	9.56
QR-4349	4-1/2	4-7/8	3/16	-349	4.475 ±.030	.210 ±.005	1	9.56
QR-4350	4-5/8	5	3/16	-350	4.600 ±.030	.210 ±.005	1	9.56
QR-4351	4-3/4	5-1/8	3/16	-351	4.725 ±.030	.210 ±.005	1	11.74
QR-4352	4-7/8	5-1/4	3/16	-352	4.850 ±.030	.210 ±.005	1	11.74
QR-4353	5	5-3/8	3/16	-353	4.975 ±.037	.210 ±.005	1	11.74
QR-4354	5-1/8	5-1/2	3/16	-354	5.100 ±.037	.210 ±.005	1	15.44
QR-4355	5-1/4	5-5/8	3/16	-355	5.225 ±.037	.210 ±.005	1	15.44
QR-4356	5-3/8	5-3/4	3/16	-356	5.350 ±.037	.210 ±.005	1	15.44
QR-4357	5-1/2	5-7/8	3/16	-357	5.475 ±.037	.210 ±.005	1	16.78
QR-4358	5-5/8	6	3/16	-358	5.600 ±.037	.210 ±.005	1	16.78
QR-4361	6	6-3/8	3/16	-361	5.975 ±.037	.210 ±.005	1	17.17
QR-4362	6-1/4	6-5/8	3/16	-362	6.225 ±.040	.210 ±.005	1	17.50
QR-4363	6-1/2	6-7/8	3/16	-363	6.475 ±.040	.210 ±.005	1	17.50
QR-4366	7-1/4	7-5/8	3/16	-366	7.225 ±.045	.210 ±.005	1	26.01
QR-4367	7-1/2	7-7/8	3/16	-367	7.475 ±.045	.210 ±.005	1	26.01
QR-4368	7-3/4	8-1/8	3/16	-368	7.725 ±.045	.210 ±.005	1	26.50
QR-4369	8	8-3/8	3/16	-369	7.975 ±.045	.210 ±.005	1	27.25
QR-4374	9-1/4	9-5/8	3/16	-374	9.225 ±.055	.210 ±.005	1	34.74
1/4" C/S								
QR-4425	4-1/2	5	1/4	-425	4.475 ±.033	.275 ±.006	1	\$9.39
QR-4426	4-5/8	5-1/8	1/4	-426	4.600 ±.033	.275 ±.006	1	9.39
QR-4427	4-3/4	5-1/4	1/4	-427	4.725 ±.033	.275 ±.006	1	9.39
QR-4428	4-7/8	5-3/8	1/4	-428	4.850 ±.033	.275 ±.006	1	9.39
QR-4429	5	5-1/2	1/4	-429	4.975 ±.037	.275 ±.006	1	10.42
QR-4430	5-1/8	5-5/8	1/4	-430	5.100 ±.037	.275 ±.006	1	10.42
QR-4431	5-1/4	5-3/4	1/4	-431	5.225 ±.037	.275 ±.006	1	10.42
QR-4432	5-3/8	5-7/8	1/4	-432	5.350 ±.037	.275 ±.006	1	11.52
QR-4433	5-1/2	6	1/4	-433	5.475 ±.037	.275 ±.006	1	11.52
QR-4434	5-5/8	6-1/8	1/4	-434	5.600 ±.037	.275 ±.006	1	11.73
QR-4435	5-3/4	6-1/4	1/4	-435	5.725 ±.037	.275 ±.006	1	11.73
QR-4436	5-7/8	6-3/8	1/4	-436	5.850 ±.037	.275 ±.006	1	11.73
QR-4437	6	6-1/2	1/4	-437	5.975 ±.037	.275 ±.006	1	12.20
QR-4438	6-1/4	6-3/4	1/4	-438	6.225 ±.040	.275 ±.006	1	12.20
QR-4439	6-1/2	7	1/4	-439	6.475 ±.040	.275 ±.006	1	12.20

STYLE QR, BUNA-N QUAD[®] RINGS


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	O-RING DASH NUMBER	INSIDE DIAMETER	CROSS SECTION	Package Quantity	List Price
QR-4440	6-3/4	7-1/4	1/4	-440	6.725 ±.040	.275 ±.006	1	13.26
QR-4441	7	7-1/2	1/4	-441	6.975 ±.040	.275 ±.006	1	13.26
QR-4442	7-1/4	7-3/4	1/4	-442	7.225 ±.045	.275 ±.006	1	13.26
QR-4443	7-1/2	8	1/4	-443	7.475 ±.045	.275 ±.006	1	14.33
QR-4444	7-3/4	8-1/4	1/4	-444	7.725 ±.045	.275 ±.006	1	16.90
QR-4445	8	8-1/2	1/4	-445	7.975 ±.045	.275 ±.006	1	19.58
QR-4446	8-1/2	9	1/4	-446	8.475 ±.055	.275 ±.006	1	21.37
QR-4447	9	9-1/2	1/4	-447	8.975 ±.055	.275 ±.006	1	21.37
QR-4448	9-1/2	10	1/4	-448	9.475 ±.055	.275 ±.006	1	34.69
QR-4450	10-1/2	11	1/4	-450	10.475 ±.060	.275 ±.006	1	38.85
QR-4452	11-1/2	12	1/4	-452	11.475 ±.060	.275 ±.006	1	39.75
QR-4453	12	12-1/2	1/4	-453	11.975 ±.060	.275 ±.006	1	41.08
QR-4454	12-1/2	13	1/4	-454	12.475 ±.060	.275 ±.006	1	54.72
QR-4455	13	13-1/2	1/4	-455	12.975 ±.060	.275 ±.006	1	41.08
QR-4458	14-1/2	15	1/4	-458	14.475 ±.070	.275 ±.006	1	41.69
QR-4464	17-1/2	18	1/4	-464	17.455 ±.085	.275 ±.006	1	82.14

Seal color may vary.

STYLE SFS SPLIT FLANGE SEALS

FOR 4-BOLT SPLIT FLANGE CONNECTORS

Flange seals are a one piece dual durometer urethane static seal. The black outer part is a tough, extrusion-resistant 95 Durometer urethane, and the yellow inner layer is 57 Durometer with low compression set and excellent sealing properties. These seals are a direct replacement for o-rings and do not require modification to any split flange groove. **For SAE J518 4-bolt Code 61/62 Split Flanges.**

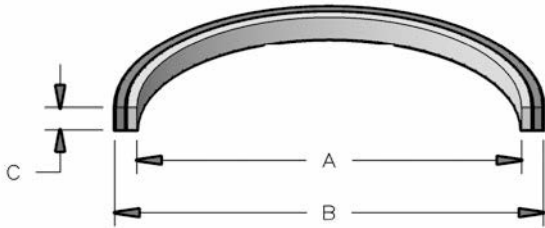

SEAL INFORMATION	
MATERIAL	URETHANE
TEMPERATURE RANGE	-40° TO +200° F
PRESSURE RANGE	0 TO 6,000 PSI
SPEED	STATIC
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	Nom. Cross Section	O-RING DASH NUMBER	G HOUSING DIAMETER	AXIAL GROOVE WIDTH	RADIAL GROOVE WIDTH	C HEIGHT	CROSS SECTION	FLANGE SIZE	List Price
SFS-8	3/4	1	1/8	1/8	-210	1.000 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	.500	\$2.60
SFS-12	1	1-1/4	1/8	1/8	-214	1.250 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	.750	2.73
SFS-16	1-5/16	1-9/16	1/8	1/8	-219	1.565 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	1.000	3.09
SFS-20	1-1/2	1-3/4	1/8	1/8	-222	1.750 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	1.250	3.36
SFS-24	1-7/8	2-1/8	1/8	1/8	-225	2.115 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	1.500	3.58
SFS-32	2-1/4	2-1/2	1/8	1/8	-228	2.490 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	2.000	4.39
SFS-40	2-3/4	3	1/8	1/8	-232	2.995 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	2.500	5.39
SFS-48	3-3/8	3-5/8	1/8	1/8	-237	3.615 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.130 ±.005	.115 ±.005	3.000	6.88


**Split Flange Seal Kits Also Available -
See the Kits & Tools Section**

Seal color may vary.



STYLE PFS SPLIT FLANGE SEALS

Molded in 92A urethane, this seal was developed to replace an o-ring in SAE J518 code 61/62 split flange applications.

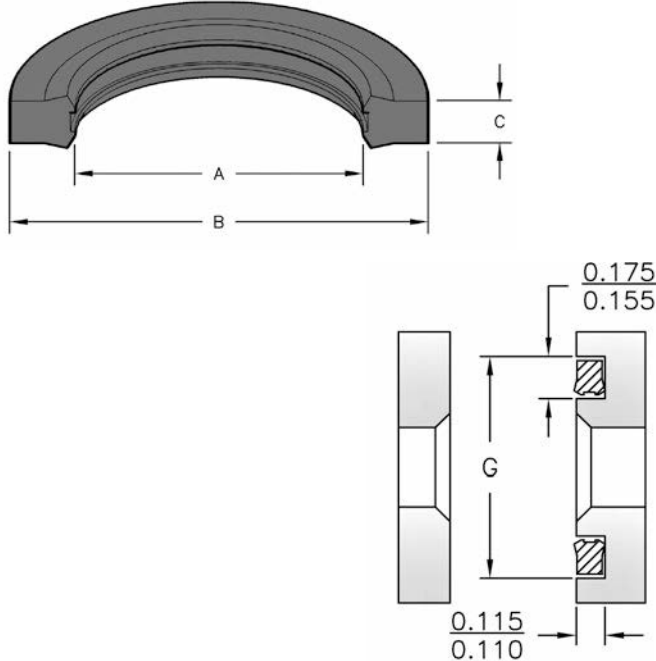



SEAL INFORMATION	
MATERIAL	92A URETHANE
TEMPERATURE RANGE	-40 - +212° F
PRESSURE RANGE	0 TO 7200 PSI
SPEED	STATIC
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	Nom. Cross Section	O-RING DASH NUMBER	G HOUSING DIAMETER	AXIAL GROOVE WIDTH	RADIAL GROOVE WIDTH	FLANGE SIZE	List Price
PFS-08	3/4	1	1/8	1/8	-210	1.000 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.500	\$2.12
PFS-12	1	1-1/4	1/8	1/8	-214	1.250 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	.750	2.18
PFS-16	1-5/16	1-9/16	1/8	1/8	-219	1.565 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	1.000	2.74
PFS-20	1-1/2	1-3/4	1/8	1/8	-222	1.750 ^{+0.005} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	1.250	1.90
PFS-24	1-7/8	2-1/8	1/8	1/8	-225	2.115 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	1.500	2.01
PFS-32	2-1/4	2-1/2	1/8	1/8	-228	2.490 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	2.000	2.11
PFS-40	2-3/4	3	1/8	1/8	-232	2.995 ^{+0.010} / _{+0.000}	.110 ^{+0.005} / _{+0.000}	.165 ±.010	2.500	3.57

STYLE HS568 HEAD SEALS



Molded in 90A urethane, this seal was developed to be used as a head seal and to replace an o-ring and a back-up. Its symmetrical one-piece design reduces the risk of installation damage and back-up blow-out.

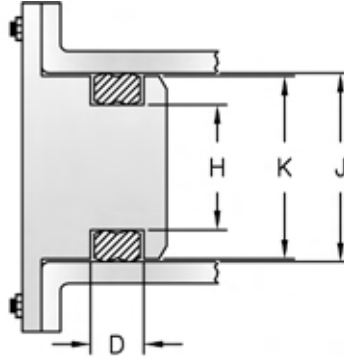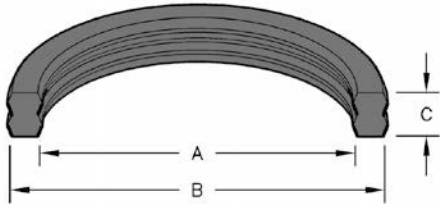

SEAL INFORMATION	
MATERIAL	90A URETHANE
TEMPERATURE RANGE	-40 - +212° F
PRESSURE RANGE	0 TO 10000 PSI
SPEED	STATIC
PART NUMBER	(Prefix) - (Dash No.)


Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	D GROOVE WIDTH	H GROOVE DIAMETER	K HEAD DIAMETER	J BORE DIAMETER	List Price
1/16" C/S								
HS568-022	1	1-1/8	1/8	.138 ^{+0.005} / _{+0.000}	1.153 ^{+0.000} / _{-.002}	1.122 ^{+0.000} / _{-.001}	1.125 ^{+0.002} / _{+0.000}	\$2.62
1/8" C/S								
HS568-228	2-1/4	2-1/2	3/16	.208 ^{+0.005} / _{+0.000}	2.278 ^{+0.000} / _{-.002}	2.497 ^{+0.000} / _{-.001}	2.500 ^{+0.002} / _{+0.000}	\$11.70
HS568-230	2-1/2	2-3/4	3/16	.208 ^{+0.005} / _{+0.000}	2.528 ^{+0.000} / _{-.002}	2.747 ^{+0.000} / _{-.001}	2.750 ^{+0.002} / _{+0.000}	11.70
HS568-232	2-3/4	3	3/16	.208 ^{+0.005} / _{+0.000}	2.778 ^{+0.000} / _{-.002}	2.997 ^{+0.000} / _{-.001}	3.000 ^{+0.002} / _{+0.000}	13.35
HS568-234	3	3-1/4	3/16	.208 ^{+0.005} / _{+0.000}	3.028 ^{+0.000} / _{-.002}	3.247 ^{+0.000} / _{-.001}	3.250 ^{+0.002} / _{+0.000}	13.35
HS568-235	3-1/8	3-3/8	3/16	.208 ^{+0.005} / _{+0.000}	3.153 ^{+0.000} / _{-.002}	3.372 ^{+0.000} / _{-.001}	3.375 ^{+0.002} / _{+0.000}	13.35
HS568-236	3-1/4	3-1/2	3/16	.208 ^{+0.005} / _{+0.000}	3.278 ^{+0.000} / _{-.002}	3.497 ^{+0.000} / _{-.001}	3.500 ^{+0.002} / _{+0.000}	13.35
HS568-238	3-1/2	3-3/4	3/16	.208 ^{+0.005} / _{+0.000}	3.528 ^{+0.000} / _{-.002}	3.747 ^{+0.000} / _{-.001}	3.750 ^{+0.002} / _{+0.000}	13.64
HS568-240	3-3/4	4	3/16	.208 ^{+0.005} / _{+0.000}	3.778 ^{+0.000} / _{-.002}	3.997 ^{+0.000} / _{-.001}	4.000 ^{+0.002} / _{+0.000}	17.01
HS568-242	4	4-1/4	3/16	.208 ^{+0.005} / _{+0.000}	4.028 ^{+0.000} / _{-.002}	4.247 ^{+0.000} / _{-.001}	4.250 ^{+0.002} / _{+0.000}	17.01
HS568-244	4-1/4	4-1/2	3/16	.208 ^{+0.005} / _{+0.000}	4.278 ^{+0.000} / _{-.002}	4.497 ^{+0.000} / _{-.001}	4.500 ^{+0.002} / _{+0.000}	17.01
HS568-246	4-1/2	4-3/4	3/16	.208 ^{+0.005} / _{+0.000}	4.528 ^{+0.000} / _{-.002}	4.747 ^{+0.000} / _{-.001}	4.750 ^{+0.002} / _{+0.000}	18.90
HS568-248	4-3/4	5	3/16	.208 ^{+0.005} / _{+0.000}	4.778 ^{+0.000} / _{-.002}	4.997 ^{+0.000} / _{-.001}	5.000 ^{+0.002} / _{+0.000}	18.90
HS568-250	5	5-1/4	3/16	.208 ^{+0.005} / _{+0.000}	5.028 ^{+0.000} / _{-.004}	5.247 ^{+0.000} / _{-.001}	5.250 ^{+0.002} / _{+0.000}	18.90
HS568-251	5-1/8	5-3/8	3/16	.208 ^{+0.005} / _{+0.000}	5.153 ^{+0.000} / _{-.004}	5.372 ^{+0.000} / _{-.001}	5.375 ^{+0.002} / _{+0.000}	18.90
HS568-252	5-1/4	5-1/2	3/16	.208 ^{+0.005} / _{+0.000}	5.278 ^{+0.000} / _{-.004}	5.497 ^{+0.000} / _{-.001}	5.500 ^{+0.002} / _{+0.000}	18.90
HS568-254	5-1/2	5-3/4	3/16	.208 ^{+0.005} / _{+0.000}	5.528 ^{+0.000} / _{-.004}	5.747 ^{+0.000} / _{-.001}	5.750 ^{+0.002} / _{+0.000}	27.93
HS568-256	5-3/4	6	3/16	.208 ^{+0.005} / _{+0.000}	5.778 ^{+0.000} / _{-.004}	5.997 ^{+0.000} / _{-.001}	6.000 ^{+0.002} / _{+0.000}	27.93
3/16" C/S								
HS568-338	3-1/8	3-1/2	9/32	.311 ^{+0.005} / _{+0.000}	3.160 ^{+0.000} / _{-.004}	3.497 ^{+0.000} / _{-.001}	3.500 ^{+0.002} / _{+0.000}	\$17.31

STYLE HS568 HEAD SEALS

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	D GROOVE WIDTH	H GROOVE DIAMETER	K HEAD DIAMETER	J BORE DIAMETER	List Price
HS568-342	3-5/8	4	9/32	.311 ^{+0.005} / _{+0.000}	3.660 ^{+0.000} / _{-.004}	3.997 ^{+0.000} / _{-.001}	4.000 ^{+0.002} / _{+0.000}	18.37
HS568-344	3-7/8	4-1/4	9/32	.311 ^{+0.005} / _{+0.000}	3.910 ^{+0.000} / _{-.004}	4.247 ^{+0.000} / _{-.001}	4.250 ^{+0.002} / _{+0.000}	18.37
HS568-346	4-1/8	4-1/2	9/32	.311 ^{+0.005} / _{+0.000}	4.160 ^{+0.000} / _{-.004}	4.497 ^{+0.000} / _{-.001}	4.500 ^{+0.002} / _{+0.000}	18.37
HS568-348	4-3/8	4-3/4	9/32	.311 ^{+0.005} / _{+0.000}	4.410 ^{+0.000} / _{-.004}	4.747 ^{+0.000} / _{-.001}	4.750 ^{+0.002} / _{+0.000}	18.90
HS568-350	4-5/8	5	9/32	.311 ^{+0.005} / _{+0.000}	4.660 ^{+0.000} / _{-.004}	4.997 ^{+0.000} / _{-.001}	5.000 ^{+0.002} / _{+0.000}	18.90
HS568-352	4-7/8	5-1/4	9/32	.311 ^{+0.005} / _{+0.000}	4.910 ^{+0.000} / _{-.004}	5.247 ^{+0.000} / _{-.001}	5.250 ^{+0.002} / _{+0.000}	18.90
HS568-353	5	5-3/8	9/32	.311 ^{+0.005} / _{+0.000}	5.035 ^{+0.000} / _{-.004}	5.372 ^{+0.000} / _{-.001}	5.375 ^{+0.002} / _{+0.000}	18.90
HS568-354	5-1/8	5-1/2	9/32	.311 ^{+0.005} / _{+0.000}	5.160 ^{+0.000} / _{-.004}	5.497 ^{+0.000} / _{-.001}	5.500 ^{+0.002} / _{+0.000}	18.90
HS568-356	5-3/8	5-3/4	9/32	.311 ^{+0.005} / _{+0.000}	5.410 ^{+0.000} / _{-.004}	5.747 ^{+0.000} / _{-.001}	5.750 ^{+0.002} / _{+0.000}	27.93
HS568-358	5-5/8	6	9/32	.311 ^{+0.005} / _{+0.000}	5.660 ^{+0.000} / _{-.004}	5.997 ^{+0.000} / _{-.001}	6.000 ^{+0.002} / _{+0.000}	27.93
HS568-360	5-7/8	6-1/4	9/32	.311 ^{+0.005} / _{+0.000}	5.910 ^{+0.000} / _{-.004}	6.247 ^{+0.000} / _{-.001}	6.250 ^{+0.002} / _{+0.000}	27.93

STYLE VMG FIBER GASKETS

Our style VMG gaskets are used in moderate duty applications as tube end seals and o-ring back-ups. The gaskets are made of a protein and glycerin impregnated fiber.

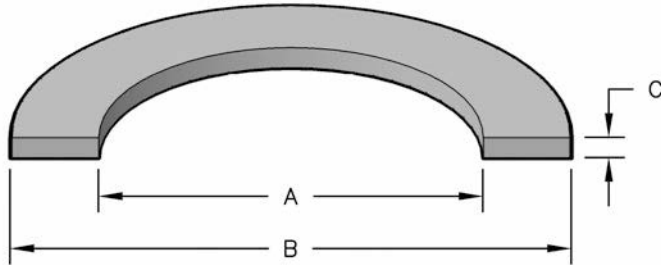

SEAL INFORMATION

MATERIAL	IMPREGNATED FIBER
TEMPERATURE RANGE	MAX 250° F
PART NUMBER	(Prefix) - (Dash No.)

Part Number	A Nom. ID	B Nom. OD	C Nom. Ht	List Price
VMG-128	1-1/2	1-11/16	.031	\$4.08
VMG-326	1-5/8	2	.031	2.52
VMG-136	2	2-3/16	.031	5.54
VMG-144	2-1/2	2-11/16	.031	5.60
VMG-2.62X3.87X.030	2-5/8	3-7/8	.031	7.17
VMG-334	2-5/8	3	.031	2.68
VMG-151	3	3-3/16	.031	6.01
VMG-238	3-1/2	3-3/4	.031	4.70
VMG-242	4	4-1/4	.031	4.76
VMG-247	4-5/8	4-7/8	.031	4.79
VMG-250	5	5-1/4	.031	4.80
VMG-258	6	6-1/4	.031	5.03
VMG-266	8	8-1/4	.031	5.30